2026

CATALOGUE



EVENT LIGHTING



EVENT LIGHTING

Event Lighting was established in 2013 with a vision to supply professional entertainment lighting products to the Australian market without compromise.

Initially offering great value par fixtures that have earned a reputation of outstanding output and reliability, Event Lighting has expanded to include a diverse range of products in lighting, staging, trussing and rigging.

Event Lighting is proudly Australian owned and has partnered with numerous factories in China in order to further product development and maintain quality and consistency of the product ranges. Our relationships with the factories ensure we can offer the best quality products at reasonable price points while having our own staff in China ensures a high level of quality control and logistical arrangements.

Over the past 10 years, Event Lighting has achieved extraordinary growth becoming a leading brand of professional entertainment equipment in Australia. During the past 5 years, Event Lighting has continued its growth relocating to a much larger warehouse and office in 2023, and appointing international distributors introducing the brand to the global market.

In Australia, Event Lighting products are featured in many large production companies and all the well known retail businesses within the industry and beyond.

Combining extensive research, development and experience, Event Lighting is driven by the passion to create and deliver high quality products and lighting solutions which are designed to perform reliably and consistently.

Event Lighting International
sales@eventlighting.com.au
+61 450 745 600
www.eventlighting.com.au

2026 Lighting Catalogue

Moving Heads 4
Fresnels and Profiles 20
Parcans 29
Pixel Bars 36
Flood Lights 40
Pixel Panels 43
Festoon 48
ArtNet Nodes 50
Wireless DMX 51
Rain Covers 52
Road Cases 53
Software 54

Flip over to see 2026 Staging and Truss Catalogue


Specifications, tables, pictures, imagery and details of products shown in this catalogue are correct at the time of printing and are subject to change without notice. All care has been taken to provide accurate information however there is no liability for any errors that may occur. E&OE.

MOVING HEADS

OUTBACK350 / OUTBACK350H-WH

OUTDOOR MOVING HEAD - 350W HYBRID



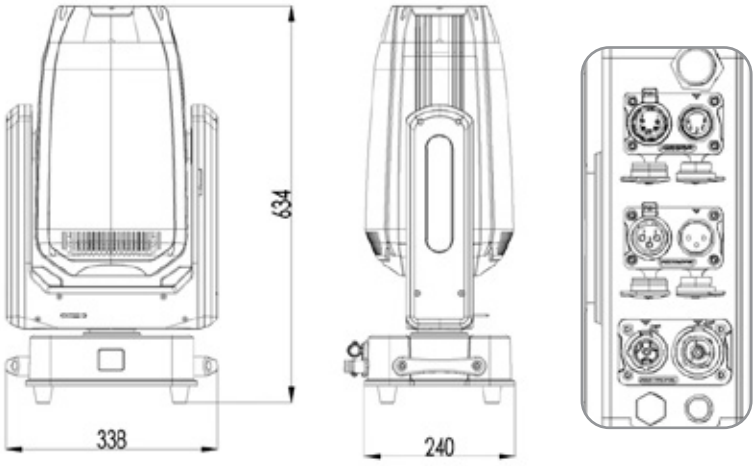

PHOTOMETRICS	
Light Source:	350W LED White
Beam Angle:	3° - 38°
Output:	69,703 lux @ 5m/ 8.2ft at 3°
CCT	8,000K
CRI	>70/90 (optional)
Led lifespan:	>20,000 hours
COLOUR	
	5 Colour + Open (first wheel)
	5 Colour + Open (second wheel)
	Colour Mixing: CMY + CTO
GOBOS	
Rotating:	7 + Open (first wheel)
Rotating:	7 + Open (second wheel)
Gobo Shaking:	Yes
Gobo Indexing:	Yes
EFFECTS	
Dimming:	0~100%
Strobe:	1 - 25 Hz
Zoom:	Motorised 3° to 38°
Prism:	Prism(1): 4-Facet circular prism, indexing
	Prism(2): 4-Facet linear prism, indexing
Frost:	Yes
MOVEMENT	
	16 bit resolution
	Auto repositioning
Pan:	540°
Tilt:	270°
POWER	
Power consumption:	500W Max.
Input Voltage:	100~240 V AC, 50/60 Hz
Connection:	True1 in/out
CONTROL	
Control Protocol:	DMX512, RDM
	WDMX Included
DMX Channels:	27 / 30
Interface:	3-pin/5-pin XLR in/out
Display:	TFT control panel
HOUSING	
Materials:	ABS & Steel, matte black finish
Protection:	High temperature automatic protection
IP rating:	IP65
Dimensions:	412 x 610 x 254mm / 16.2" x 24.0" x 10.0"
Net Weight:	20 kg / 44 lbs

ROTATING GOBO WHEEL (1)



ROTATING GOBO WHEEL (2)



COLOUR WHEEL (1)



COLOUR WHEEL (2)



Road Case (Optional)

OUTBACK350HCASE1AF
Road case to suit 1 unit of OUTBACK350H




VIEW ONLINE FOR MORE INFORMATION

OUTBACK180B / OUTBACK180B-WH

OUTDOOR MOVING HEAD - 180W BEAM



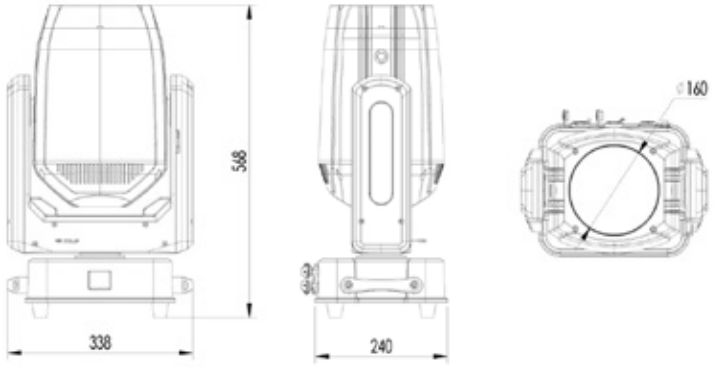

COLOUR WHEEL (1)



COLOUR WHEEL (2)



FIXED GOBO WHEEL



ROTATING GOBO WHEEL



PHOTOMETRICS	
Light Source:	180W LED White
Beam Angle:	1.8°
Output:	191,301 lux @ 5m/ 16.4 ft at 1.8°
CCT	7,000K
CRI	>70
Led lifespan:	>20,000 hours
COLOUR	
	14 Colour + Open (first wheel)
	8 Colour + Open (second wheel)
GOBOS	
Fixed:	10 + Open
Rotating:	4 + Open
Gobo Shaking:	Yes
Gobo Indexing:	Yes
EFFECTS	
Dimming:	0~100%
Strobe:	1 - 25 Hz
Focus:	Motorised
Prism:	Prism (1): 24-Facet circular prism, (Optional Rainbow Effect)
	Prism (2): 5-Facet linear prism, indexing
Prism Overlap:	Yes
Frost:	Yes
MOVEMENT	
	16-bit resolution
	Auto repositioning
Pan:	540°
Tilt:	270°
POWER	
Power consumption:	260W Max.
Input Voltage:	100~240 V AC, 50/60 Hz
Connection:	True1 in/out
CONTROL	
Control Protocol:	DMX512, RDM
	Optional Wireless
DMX Channels:	20 / 23
Interface:	3-pin/5-pin XLR in/out
Display:	TFT control panel
HOUSING	
Materials:	ABS & Steel, matte black finish
Protection:	High temperature automatic protection
IP rating:	IP65
Dimensions:	338 x 240 x 555mm / 13.3" x 9.4" x 21.9"
Net Weight:	16.5 kg / 36 lbs

Road Case (Optional)

OUTBACK350HCASE2AF

Road case to suit 2 unit of OUTBACK180B




VIEW ONLINE FOR MORE INFORMATION


MOVING HEADS


OUTBACK12X60W / OUTBACK12X60W-WH


OUTDOOR MOVING HEAD - 12 X 60W RGBL WASH



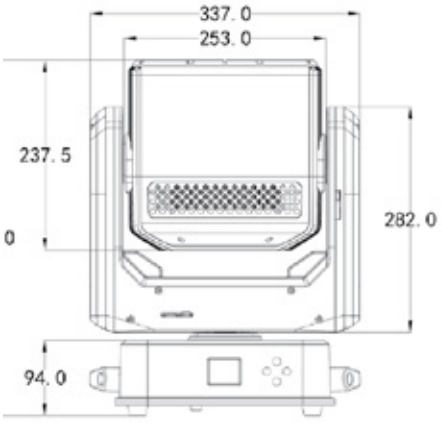


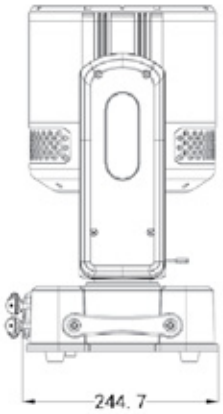





PHOTOMETRICS	
Light Source:	12 x 60W RGBL 4-in-1 LEDs
Beam Angle:	3°- 26°
Zoom Angle:	3°- 45°
Output:	24,547 lux @ 5m/ 16.4 ft at 3°
CCT	2,000 - 10,000K
CRI	>80
Led lifespan:	>20,000 hours
EFFECTS	
Dimming:	0~100%
Strobe:	1 - 25 Hz
Zoom:	Motorised, 3°-45°
Pixel Control:	Yes
MOVEMENT	
	16 bit resolution
	Auto repositioning
Pan:	540°
Tilt:	270°
POWER	
Power consumption:	570W Max.
Input Voltage:	100~240 V AC, 50/60 Hz
Connection:	True1 in/out
CONTROL	
Control Protocol:	DMX512, RDM
DMX Channels:	15 / 29 / 61
Interface:	3-pin/5-pin XLR (in/out)
Display:	TFT control panel
HOUSING	
Materials:	ABS & Steel, matte black finish
Protection:	High temperature automatic protection
IP rating:	IP65
Dimensions:	337 x 240 x 457mm / 13.3" x 9.4" x 18.0"
Net Weight:	11 kg / 24 lbs

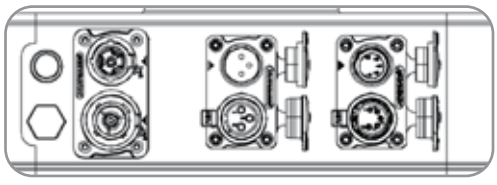

Road Case (Optional)

OUTBACK12X60WCASEAF

Road case to suit 2 units of HAVOCW19X60



VIEW ONLINE FOR MORE INFORMATION


DELUGEM800HF

OUTDOOR MOVING HEAD - 800W HYBRID WITH FRAMING







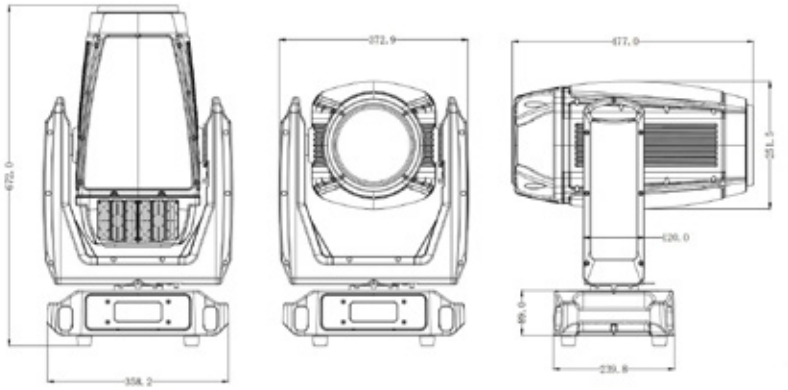

PHOTOMETRICS	
Light Source:	800W LED Engine
Beam Angle:	5.5°-50°
Output:	121,000 lux @ 5m/ 16.4 ft at 4.5°
CCT:	7,000K
CRI:	>70 / 90
Led lifespan:	>20,000 hours
Framing:	Yes, 4 Shutters
COLOUR	
	5 Colour + CRI
	Colour Mixing: CMY + CTO
GOBOS	
Static:	8 + Open
Rotating:	7 + Open
Animation wheel:	Yes
Gobo Shaking:	Yes
Gobo Indexing:	Yes
EFFECTS	
Dimming:	0~100%
Strobe:	1 - 25 Hz
Focus:	Motorised
Zoom:	Motorised 4.5° to 50°
Prism:	Prism(1): 4-Facet prism, indexing
	Prism(2): 4-Facet prism, indexing
Frost:	Yes
Iris:	Yes
MOVEMENT	
	16-bit resolution
	Auto repositioning
Pan:	540°
Tilt:	260°
POWER	
Power consumption:	910W Max.
Input Voltage:	100~240V AC, 50/60Hz
Connection:	True1 in/out
CONTROL	
Control Protocol:	DMX512, RDM, Art -Net, sACN
DMX Channels:	23 / 32S / 32F / 42
Interface:	3-pin/5-pin XLR in / out, RJ45 in / out
Display:	LCD control panel with 4 touch buttons
HOUSING	
Materials:	ABS & Steel, matte black finish
IP rating:	IP65
Dimensions:	358.2 x 239.8 x 658mm / 14.1" x 9.4" x 25.9"
Net Weight:	29 kg / 64 lbs

ROTATING GOBO WHEEL (1)



ROTATING GOBO WHEEL (2)



COLOUR WHEEL (1)



COLOUR WHEEL (2)




VIEW ONLINE FOR MORE INFORMATION

MOVING HEADS

DELUGEM19X60WFX

OUTDOOR MOVING HEAD - 19 X 60W WASH WITH ROTATING LENSES



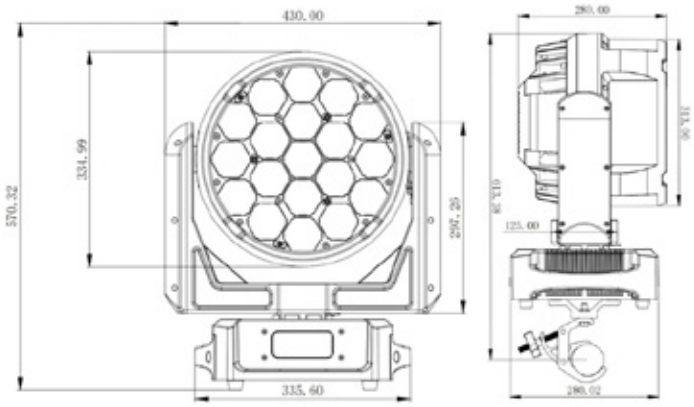



PHOTOMETRICS	
Light Source:	19 x 60W RGBW LEDs
	+ 78 x 0.5W RGB LEDs
Beam Angle:	4.5° - 61°
Output:	145,200 lumens @ 3m / 9.8ft (10°)
Led lifespan:	50,000 hours
EFFECTS	
Dimming:	0-100%, 16 bit
Strobe:	Yes
Zoom:	Motorised, 4.5° - 61°
Pixel Control:	Yes
	Aura LEDs Effects (RGB LEDs)
MOVEMENT	
Pan:	540°
Tilt:	205°
POWER	
Power consumption:	1,500W Max.
Input Voltage:	100-240V AC, 50/60 Hz
Connection:	True1 in/out
CONTROL	
Operation Modes:	DMX, auto, sound active, master/slave
Control Protocol:	DMX, RDM, ArtNet, sACN
DMX Channels:	28 / 98 / 251 / 321
Interface:	5-pin DMX in/out, RJ45 in / out
Display:	Full colour 180° reversible LCD control panel
	Software upgrade via RJ45 cable
HOUSING	
Materials:	ABS & Steel, matte black finish
IP rating:	IP65
Dimensions:	430 x 280 x 514 mm / 16.9" x 11.0" x 20.2"
Net Weight:	23 kg / 51 lbs



Road Case (Optional)

DELM7X60CASE4AF

Road Case to suit 4 pcs of DELUGEM19X60WFX




VIEW ONLINE FOR MORE INFORMATION

DELUGEM7X60WFX


OUTDOOR MOVING HEAD - 7 X 60W WASH WITH ROTATING LENSES



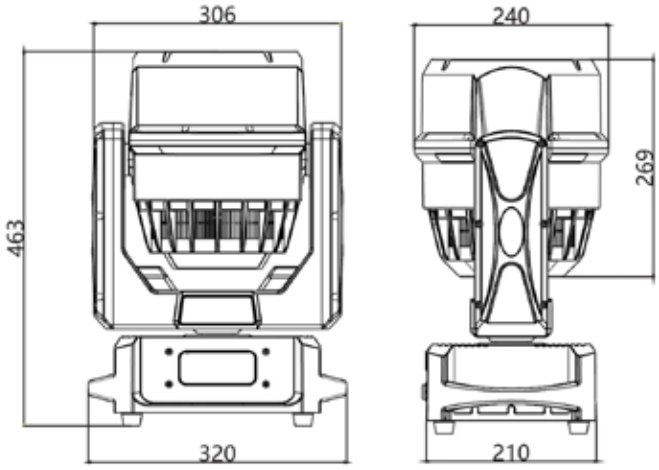



PHOTOMETRICS	
Light Source:	7 x 60W RGBW LEDs
	+ 28 x 0.5W RGB LEDS
Beam Angle:	3° - 45°
Output:	141,641 Lux @ 2m / 6.6ft (3°)
Led lifespan:	50,000 hours
EFFECTS	
Dimming:	0-100%, 16 bit
Strobe:	Yes
Zoom:	Motorised, 3° - 45°
Pixel Control:	Yes
	Aura LEDs Effects (RGB LEDs)
MOVEMENT	
Pan:	540°
Tilt:	205°
POWER	
Power consumption:	700W Max.
Input Voltage:	100-240V AC, 50/60 Hz
Connection:	True1 in/out
CONTROL	
Operation Modes:	DMX, auto, sound active, master/slave
Control Protocol:	DMX, RDM, ArtNet, sACN
DMX Channels:	28 / 49 / 105 / 127
Interface:	5-pin DMX in/out, RJ45 in/out
Display:	Full colour 180° reversible LCD control panel
	Software upgrade via RJ45 cable
HOUSING	
Materials:	ABS & Steel, matte black finish
IP rating:	IP65
Dimensions:	310 x 210 x 463 mm / 12.2″ x 8.3″ x 18.2″
Net Weight:	12 kg / 26 lbs
	2 x Omega brackets included

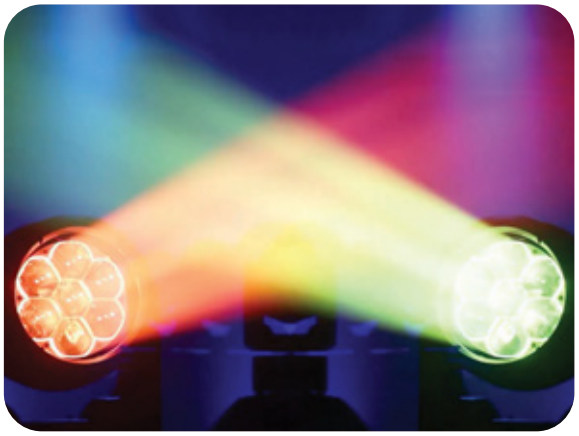

Road Case (Optional)

DELM7X60CASE4AF

Road Case to suit 4 pcs of DELUGEM7X60WFX




VIEW ONLINE FOR MORE INFORMATION

MOVING HEADS

DELUGEM120WFX

OUTDOOR MOVING HEAD - 120W RGBL WASH WITH FRESNEL LENS



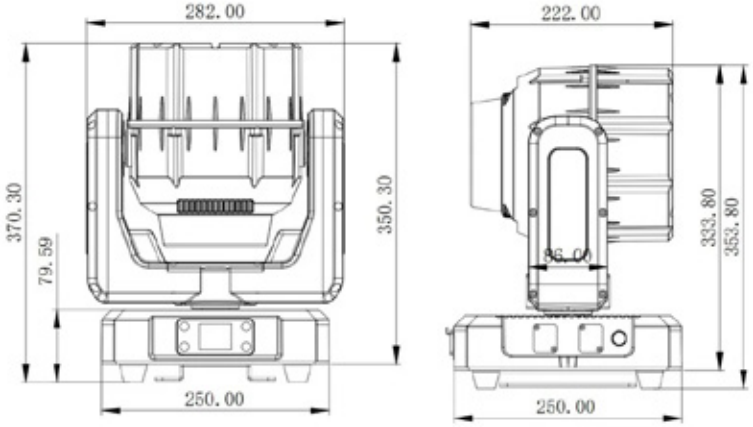





PHOTOMETRICS	
Light Source:	1 x 120W RGBL
	48 x 1W RGBWW
Beam Angle:	3.8° - 38°
Output:	93,750 Lux @ 2m / 6.6ft at 3.8°
	Flicker-free operation
	140mm Fresnel Lens
LED Lifespan:	50,000 hours
EFFECTS	
Dimming:	0-100%, 16 bit
	Aura LEDs Effects (RGB LEDs)
Strobe:	Yes
Zoom:	Motorised, 3.8° - 38°
MOVEMENT	
Pan:	540°
Tilt:	230°
POWER	
Input Voltage:	100-240V AC, 50/60 Hz
Power consumption:	180W Max
Connection:	True1 in/out
CONTROL	
Operation Modes:	DMX, auto, sound active, master/slave
Control Protocol:	DMX, ArtNet, sACN
DMX Channels:	18 / 20 / 23 / 41 / 225
Control Interface:	5-pin DMX in/out, RJ45 in / out
Display:	LCD control panel
HOUSING	
Housing Materials:	ABS and steel, matte black finish
IP Rate:	IP65
Size:	282 x 250 x 365 mm 11.1" x 9.8" x 14.4"
Net Weight:	7 kg / 15 lbs



VIEW ONLINE FOR MORE INFORMATION






MOVING HEADS

HAVOCH925F / HAVOCH925F-WH

INDOOR MOVING HEAD - 925W HYBRID WITH FRAMING



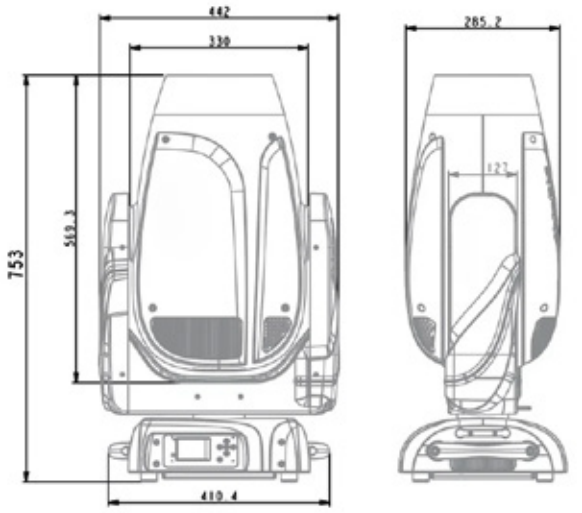



PHOTOMETRICS	
Light Source:	925w LED White
Beam Angle:	4°-50°
Output:	103,000 lux @ 5m / 16.4 ft at 4°
Colour Temperature:	7,700K
LED lifespan:	20,000 hours
Colour	
	8 Colours + Open
	Linear CMY+CTO
GOBOS	
Fixed:	8 + Open
Rotating:	7+ Open
Outside:	30mm
Inside:	20mm
EFFECTS	
Dimming:	0~100%
Focus:	Motorised
Prism:	Rotating 4 facets
	Animation wheel
Iris, Strobe & Frost:	Yes
Zoom:	Yes (4° to 50°)
	4 Individual Shutter Blades Rotating +/- 45°
MOVEMENT	
	16 bit resolution and Auto repositioning
Pan:	540° (4.7 sec)
Tilt:	267° (4 sec)
POWER	
Power Consumption:	967W Max
Input Voltage:	100~240V AC, 50/60 Hz
Connection:	TrueOne in/out
CONTROL	
Control Protocol:	DMX512, RDM (Optional Wireless)
DMX Channels:	39
Interface:	5-pin XLR in/out, RJ45 in / out
	RDM function to change DMX address
Display:	2.4'' colour LCD control panel
	Software Upgrade via DMX: Yes
HOUSING	
Materials:	ABS & Steel, matte black finish
Dimensions:	443 x 748 x 305mm / 17.4" x 29.4" x 12"
Cooling:	Multi sensor thermostat controlled variable speed fan
IP rating:	IP20
Net Weight:	35.1 kg / 77 lbs
Rigging:	2 x omega brackets with 1/4-turn quick locks


COLOUR WHEEL



FIXED GOBO WHEEL



ROTATING GOBO WHEEL

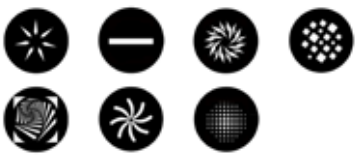


VIEW ONLINE FOR MORE INFORMATION

HAVOCH600F / HAVOCH600F-WH

INDOOR MOVING HEAD - 600W HYBRID WITH FRAMING



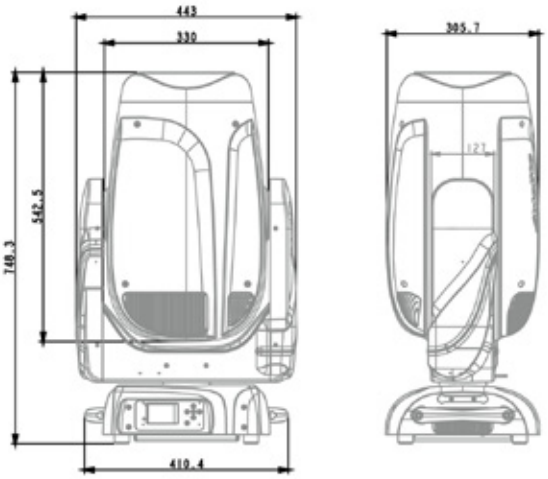

PHOTOMETRICS	
Light Source:	600w LED White
Beam Angle:	4°-50°
Output:	20,050 lumen, 85,000 lux @ 2.5m / 8.2 ft at 5°
Led lifespan:	>20,000 hours
COLOUR	
	8 Colours + Open
	Linear CMY+CTO
Gobos	
Fixed:	8 + Open
Rotating:	7+ Open
Animation:	Yes
EFFECTS	
Dimming:	0~100%
Strobe:	Yes
Focus:	Motorised
Prism:	Rotating 4 facets
Frost:	Yes
Zoom:	Yes (4° to 50°)
MOVEMENT	
	16 bit resolution
	Auto repositioning
Pan:	630° (4.4 sec) or 540°(3.9 sec)
Tilt:	233° (2.3 sec)
POWER	
Power consumption:	590W Max.
Input Voltage:	100~240 V AC, 50/60 Hz
Connection:	Neutrik® PowerCON in/out
CONTROL	
Control Protocol:	DMX512, RDM, Art-Net, optional CRMX
DMX Channels:	28/30/37/38
Interface:	5-pin XLR in/out, RJ45 in/out
RDM:	function to change DMX address
Display	2.4" colour LCD control panel
Software Upgrade	Yes, via DMX
HOUSING	
Materials:	ABS & Steel, matte black or white finish
Dimensions:	443 x 748 x 305mm / 17.4" x 29.4" x 12"
Cooling:	Multi sensor thermostat controlled variable speed fan
IP rating:	IP20
Net Weight:	35.1 kg / 77 lbs
Rigging:	2x omega brackets with 1/4-turn quick locks


COLOUR WHEEL



FIXED GOBO WHEEL



ROTATING GOBO WHEEL

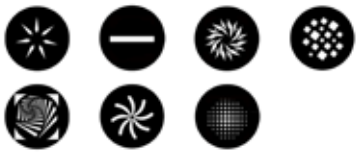

Road Case (Optional)

HAVOCH600FCASE1AF

Road case to suit 1 unit of HAVOCH600F
(Horizontal loading)




VIEW ONLINE FOR MORE INFORMATION

HAVOCH330 / HAVOCH330-WH

INDOOR MOVING HEAD - 330W HYBRID



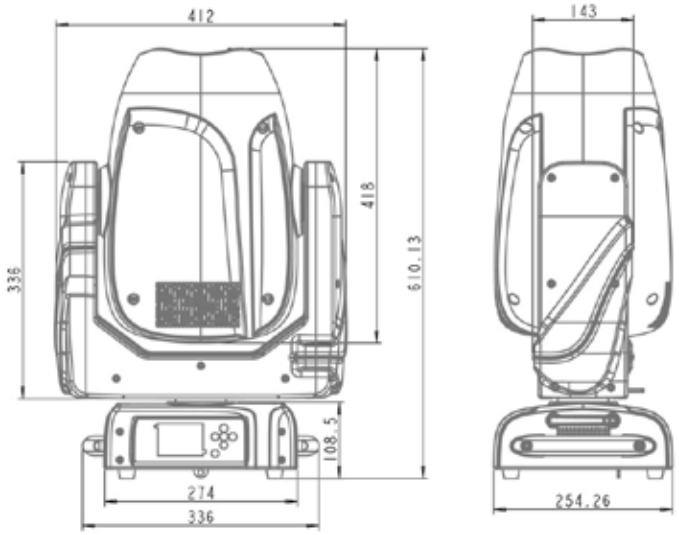


PHOTOMETRICS	
Light Source:	330w LED White
Beam Angle:	4°-48°
Output:	8,372 lumen, 89,500 lux @ 5m
	236,600 lux at 5m / 16.4 ft at 4°
Led lifespan:	60,000 hours
COLOUR	
	3 Colour Wheels: 3 colour + CMY each
	9 Colours + CMY + Open total
GOBOS	
Static:	11 + Open
Rotating:	8 + Open
EFFECTS	
Dimming:	0~100%
Strobe:	Yes
	Animation Wheel
Focus:	Motorised
Zoom:	Yes (4° to 48°)
Prism:	Rotating 8 Facets, Linear 6 Facet
Frost:	Yes
MOVEMENT	
	16-bit resolution
	Auto repositioning
Pan:	630° (4.0 sec) or 540° (3.58 sec)
Tilt:	265° (2.8 sec)
POWER	
Power consumption:	490W Max.
Input Voltage:	100~240V AC, 50/60Hz
Connection:	Neutrik® PowerCON in/out
CONTROL	
Control Protocol:	DMX512, RDM
Wireless:	Optional
DMX Channels:	30
Interface:	3-pin/5-pin XLR,
Display:	2.4'' colour LCD control panel
	RDM function to change DMX address
Software Upgrade via DMX:	Yes
HOUSING	
Materials:	ABS & Steel, matte black finish
IP rating:	IP20
Cooling:	Multi sensor thermostat controlled variable speed fan
Dimensions:	412 x 610 x 254mm / 16.22" x 24.02" x 10"
Net Weight:	21.5 kg / 47 lbs
Rigging:	2 x omega brackets with 1/4-turn quick locks

COLOUR WHEEL



FIXED GOBO WHEEL

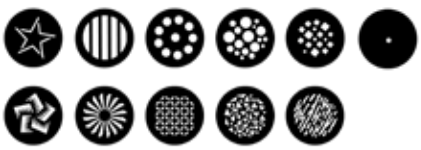

ROTATING GOBO WHEEL



Accessories (Optional)

HAVOCH330CASE2AF
Road case to suit 2 units of HAVOCH330

GOBOH330TPK
Theatrical Gobo Package to suit HAVOCH330




VIEW ONLINE FOR MORE INFORMATION

HAVOCH200 / HAVOCH200-WH

INDOOR MOVING HEAD - 200W HYBRID



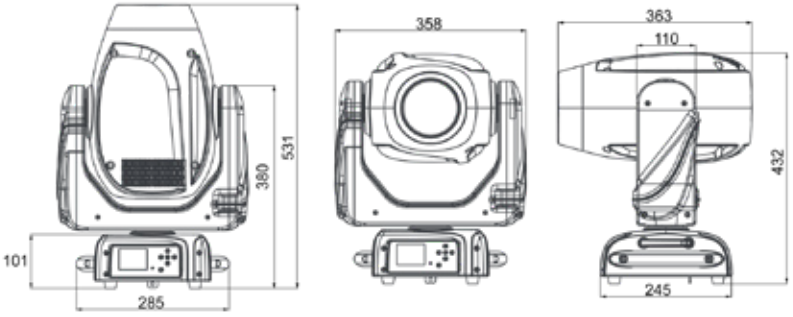


PHOTOMETRICS	
Light Source:	200W LED White
Beam Angle:	4°-30.8°
Output:	6,940 lumen, 65,166 lux @ 5m / 16.4 ft
Led lifespan:	50,000 hours
COLOUR	
	11 colour + open
	Indexable and bidirectional rainbow effect
	Colour bounce
GOBOS	
Fixed:	17 + Open
Rotating:	8 + Open
EFFECTS	
Dimming:	0~100%
Strobe:	Yes
Focus:	Motorised
Prism:	5 facets
Frost:	Yes
Zoom:	Yes (4° to 30.8°)
POWER	
Power consumption:	292W Max.
Input Voltage:	100~240V AC, 50/60 Hz
Connection:	True1 in/out
CONTROL	
Control Protocol:	DMX512, RDM
	Optional Wireless
DMX Channels:	17 / 21
Interface:	3-pin/5-pin XLR in/out
	RDM function to change DMX address
Display:	2.4'' colour LCD control panel
Software Upgrade via DMX or USB:	Yes
HOUSING	
Materials:	ABS & Steel, matte black finish
Cooling:	Multi sensor thermostat controlled variable speed fan
IP rating:	IP20
Dimensions:	531 x 358 x 245mm / 20.91" x 14.09" x 9.65"
Net Weight:	15 kg / 33 lbs

COLOUR WHEEL



FIXED GOBO WHEEL

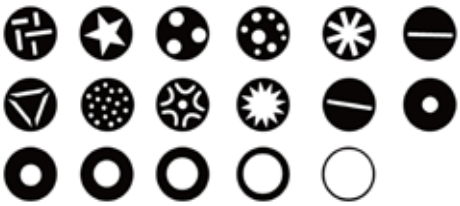

ROTATING GOBO WHEEL





Road Case (Optional)

HAVOCH200CASE2AF

Road case to suit 2 UNITS OF HAVOCH200




VIEW ONLINE FOR MORE INFORMATION

MOVING HEADS

HAVOCS150 / HAVOCS150-WH

INDOOR MOVING HEAD - 150W SPOT



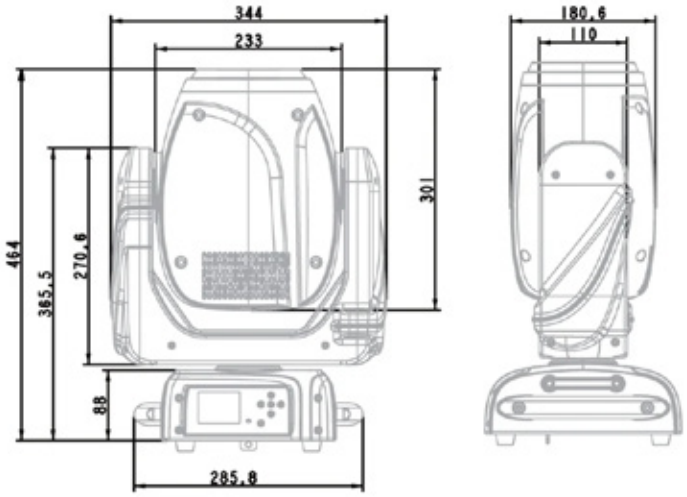

PHOTOMETRICS	
Light Source:	150W LED White
Beam Angle:	10.2°-48.4°
Output:	9,270 lux @ 5m / 16.4 ft @ 10.2°
Led lifespan:	50,000 hours
COLOUR	
Colour Wheel:	8 colour + open
GOBOS	
Fixed:	10 + Open
Rotating:	7 + Open
EFFECTS	
Dimming:	0~100%
Strobe:	Yes
Focus:	Motorised
Zoom:	Yes (10.2°-48.4°)
Prism:	3 facets
Frost:	Yes
Shaking:	Yes
MOVEMENT	
	16-bit resolution
	Auto repositioning
Pan:	540° (2.4 sec)
Tilt:	263° (1.3 sec)
POWER	
Power consumption:	206W Max.
Input Voltage:	100~240V AC, 50/60Hz
Connection:	True1 in/out
CONTROL	
Control Protocol:	DMX512, RDM
	Optional Wireless
DMX Channels:	17 / 21
Interface:	3-pin/5-pin XLR (in/out)
	RDM function to change DMX address
Display:	2.4'' colour LCD control panel
Software Upgrade via DMX or USB:	Yes
HOUSING	
Materials:	ABS & Steel, matte black finish
IP rating:	IP20
Dimensions:	464 x 334 x 181mm / 18.27" x 13.15" x 7.13"
Cooling:	Fan speed auto change according to temperature
Net Weight:	14 kg / 31 lbs

COLOUR WHEEL



FIXED GOBO WHEEL



ROTATING GOBO WHEEL



Road Case (Optional)

HAVOCH150CASE2AF

Road case to suit 2 units of HAVOCH200




VIEW ONLINE FOR MORE INFORMATION

HAVOCB120 / HAVOCB120-WH

INDOOR MOVING HEAD - 120W BEAM



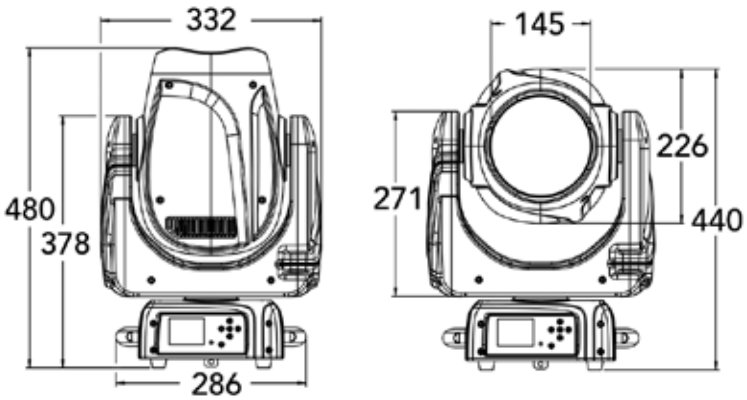


PHOTOMETRICS	
Light Source:	120W White LED
Beam Angle:	1°
Output:	2,170 lumen, 150,000 lux @ 5m / 16.4 ft
LED Lifespan:	60,000 hours
COLOUR	
	14 colours + open
GOBO	
	17 gobos + open
EFFECTS	
Focus:	Motorised
Prism:	6-linear and 8-facets prisms
Frost:	Yes
MOVEMENT	
	16-bit, auto-reposition
Pan:	630° (4.3s), 540° (3.9s)
Tilt:	233° (2.2s)
POWER	
Input Voltage:	100~240V AC, 50/60Hz, 172W
Connection:	True1 in/out
CONTROL	
Operation Modes:	DMX, auto, sound active, master/slave
Control Protocol:	DMX512, RDM (optional: W-DMX™)
DMX Channels:	14 / 16
RDM: reverse	Change DMX address, display flip, X/Y
Control Interface:	3-pin XLR in/out, 5-pin XLR in/out
Display:	2.4'' Colour LCD Control Panel with battery power
HOUSING	
Materials:	ABS & steel, matte black finish
Cooling:	Multi-sensor thermostat controlled variable speed fan
IP Rating:	IP20
Dimensions:	464 x 334 x 181mm / 18.27" x 13.15" x 7.13"
Net Weight:	12.75 kg / 29 lbs
Rigging:	2 x omega brackets with 1/4 turn quick locks

COLOUR WHEEL



FIXED GOBO WHEEL

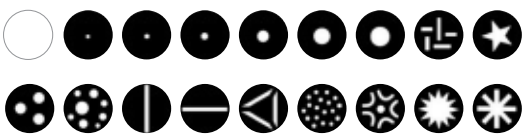



Road Case (Optional)

HAVOCB120AF

4 way case for Event Lighting HAVOCB120




VIEW ONLINE FOR MORE INFORMATION

MOVING HEADS

HAVOCW19X40CRI / HAVOCW19X40CRI-WH


INDOOR MOVING HEAD - 19 X 40W WASH



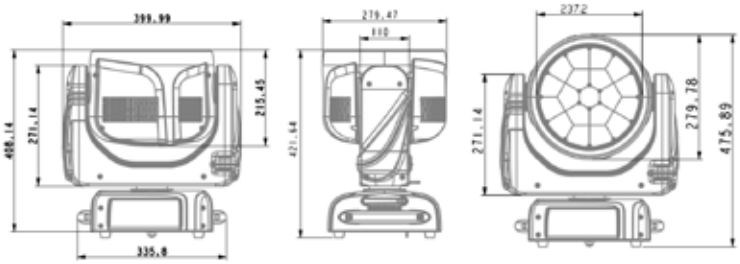



PHOTOMETRICS	
Light Source:	19 x 40W RGB+WW LEDs
Beam Angle:	4°-48°
Output:	7,443 lumen, 28,376 lux @ 5m / 16.4 ft at 4°
	1,208 lux @ 5m / 16.4 ft at 48°
	CRI≥93, R9≥95
LED Lifespan:	60,000 hours
EFFECTS	
Dimming:	0-100%
Pixel Control:	Yes
Strobe:	Yes
Zoom:	Motorised, 4°-48°
MOVEMENT	
	16-bit auto reposition
Pan:	540° (3.2s)
Tilt:	265° (1.57s)
POWER	
Input Voltage:	100-240V AC, 50/60Hz
Power consumption:	535W Max
Connection:	True1 in/out
CONTROL	
Control Protocol:	DMX512, RDM
DMX Channels:	Main 18/25/37; Pixel 14/21/109/86; 12/76
Control Interface:	3-pin DMX in/out, 5-pin DMX in/out
Display: backup	2.4" colour LCD control panel with battery
Software:	Upgradeable via DMX or USB
HOUSING	
Housing Materials:	ABS and steel, matte black finish
Cooling:	Sensor controlled fan
Rigging:	2 x Omega bracket with 1/4 turn quick locks
Dimensions:	400 x 280 x 421.6mm / 15.75" x 11.02" x 16.6"
Net Weight:	15.9 kg / 35 lbs

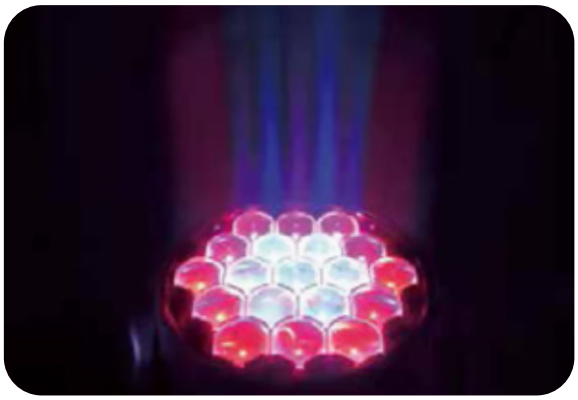

Road Case (Optional)

HAVOCW19X40CASE2AF

Road case to suit 2 units of HAVOCW19X40




VIEW ONLINE FOR MORE INFORMATION

HAVOCW7X40CRI / HAVOCW7X40CRI-WH

INDOOR MOVING HEAD - 7 X 40W WASH



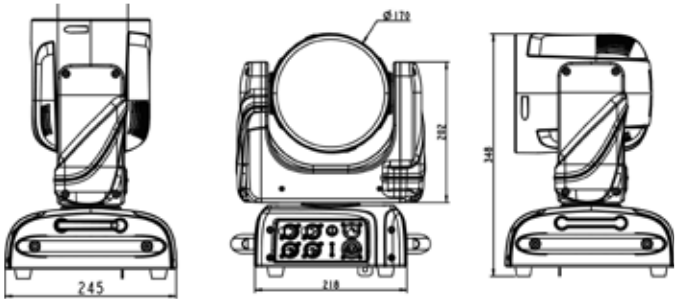



PHOTOMETRICS	
Light Source:	7 x 40W RGB+WW LEDs
Beam Angle:	6°-53°
Colour temperature:	2,800 - 10,000K
Output:	4130.4 lumen,(6°)
	46110 lux - (53°) 3931 lux @ 3m / 9.8 ft
	CRI≥93, R9≥95
LED Lifespan:	60,000 hours
EFFECTS	
Dimming:	0-100%
Pixel Control:	Yes
Strobe:	0.5-26Hz
Zoom:	Motorised, 6°-53°
MOVEMENT	
	16-bit auto reposition
Pan:	540° (2.61s)
Tilt:	265° (1.03s)
POWER	
Input Voltage:	100-240V AC, 50/60Hz
Connection:	True1 in/out
CONTROL	
Operation Modes:	DMX, auto, sound active, master/slave
Control Protocol:	DMX512, RDM, Art-Net (optional: W-DMX™)
DMX Channels:	Main 18/25/37; 14/21/61/38; Pixel 8/28
Control Interface:	3-pin DMX in/out, 5-pin DMX in/out
Display:	2.4" colour LCD control panel with battery backup
Software:	Upgradeable via DMX or USB
HOUSING	
Housing Materials:	ABS and steel, matte black finish
Cooling:	Sensor controlled fan
Dimensions:	271 x 245 x 339mm / 10.67" x 9.65" x 13.35"
Net Weight:	7.2 kg / 16 lbs
Rigging:	2 x Omega bracket with 1/4 turn quick locks



Road Case (Optional)

HAVOCW7X40CASE4AF

Road case to suit 4 units of HAVOCW7X40





VIEW ONLINE FOR MORE INFORMATION

F200VW / F200VW-WH

VARIABLE WHITE FRESNEL WITH MANUAL ZOOM



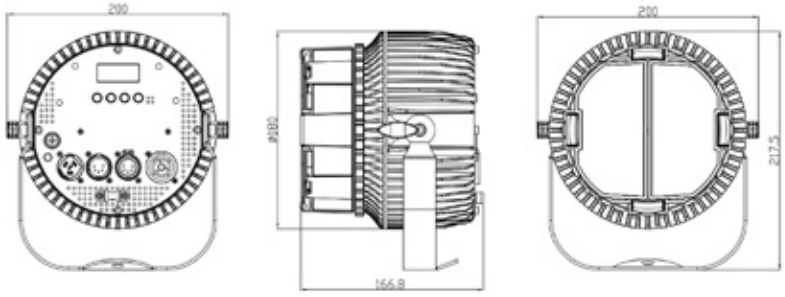

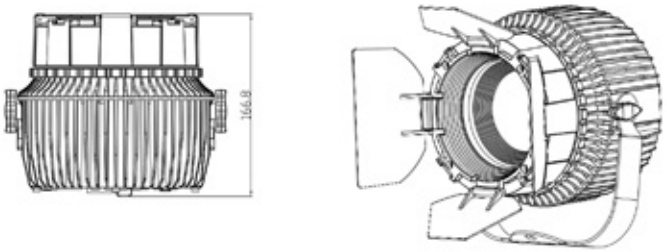



PHOTOMETRICS	
Light Source:	2 x 100W cool white 6,500K and warm white 2,700K COB LED
CRI:	95+
Beam Angle:	20°~53°
Field Angle:	34°~70°
Output:	3,550 lux @ 3m / 9.8 ft at 20°, 1,025 lux @ 3m / 9.8 ft at 53°
Lens:	80mm Planconvex lens
PWM:	1,200Hz
LED Lifespan:	50,000 hours
EFFECTS	
Dimming:	0~100%, 16-bit
Strobe:	1~25Hz
Zoom:	Manual, 20°~53°
Barn Door:	Included
Gel Clip:	Included
POWER	
Power Supply:	100~240V AC, 50/60Hz, 200W
Power Connection:	True1 in/out
CONTROL	
Operational Modes:	Manual, Master / Slave & DMX, WDMX, RDM
Display:	4-button LCD control panel
Control Protocol:	DMX512
DMX Channel Mode:	1 / 1U / 2 / 5 / 7 / User
Control Interface:	5-pin XLR in/out
HOUSING	
Housing Materials:	Die- cast Aluminum Housing
Housing Finishing:	Matte Black
Cooling:	Fanless Cooling with Temperature Protection
Net Weight:	217.5 x 167 x 200mm / 8.56" x 6.57" x 7.87"
Dimension:	3.2 kg / 7 lbs





VIEW ONLINE FOR MORE INFORMATION

F160QW / F160QW-WH

QUAD COLOUR FRESNEL WITH MANUAL ZOOM



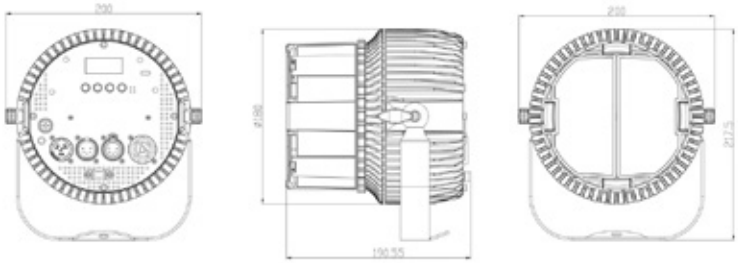

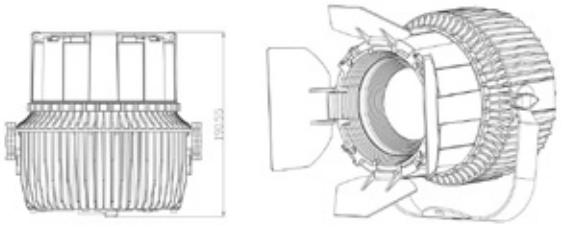



PHOTOMETRICS	
Light Source:	4 x 40W 4in1 RGBW(Warm White) LED
CRI:	Warm white - 80, but it can be up to 95 mixing with RGB (low level)
Beam Angle:	15°~55°
Field Angle:	25°~65°
Output:	3,000 lux @ 3m / 9.8 ft at 15°, 820 lux @ 3m / 9.8 ft at 55°
Lens:	80mm Planconvex lens
PWM:	24,000 Hz
LED Lifespan:	50,000 hours
EFFECTS	
Dimming:	0~100%, 16-bit
Strobe:	1~25Hz
Zoom:	Manual, 15°~55°
Barn Door:	Included
Gel Clip:	Included
POWER	
Power Supply:	100~240V AC, 50/60Hz, 160W
Power Connection:	True1 in/out
CONTROL	
Operational Modes:	Manual, Master / Slave & DMX, WDMX, RDM
Display:	4-button LCD control panel
Control Protocol:	DMX512
DMX Channel Mode:	1 / 2 / 3 / 4 / 6 / 10 / 11 / User
Control Interface:	5-pin XLR in/out
HOUSING	
Housing Materials:	Die- cast Aluminum Housing
Housing Finishing:	Matte Black
Cooling:	Fanless Cooling with Temperature Protection
Dimension:	217.5 x 190.5 x 200mm / 8.56" x 7.5" x 7.87"
Net Weight:	3.4 kg / 7 lbs



Road Case (Optional)

OUTBACK350HCASE1AF
Road case to suit 1 unit of OUTBACK350H





VIEW ONLINE FOR MORE INFORMATION

F96VW / F96VW-WH

VARIABLE WHITE FRESNEL WITH MANUAL ZOOM



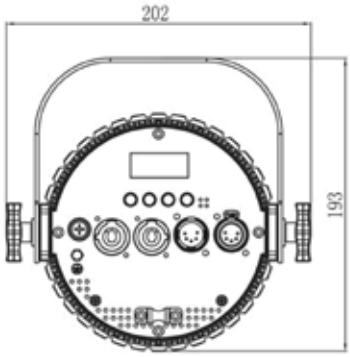

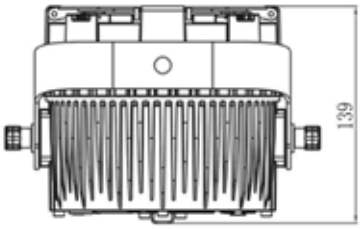









PHOTOMETRICS	
Light Source:	2 x 48W cool white 5,700K and warm white 2,700K COB LED
Beam Angle:	20°~50°
Field Angle:	50°~67°
Output:	1,230 lux @ 3m / 9.8ft at 20°, 395 lux @ 3m / 9.8ft at 50°
Lens:	80mm Fresnel
CRI:	95+
PWM:	1,200Hz
Led lifespan:	50,000 hours
EFFECTS	
Dimming:	0~100%, 16-bit
Strobe:	1~25Hz
Zoom:	Manual, 20°~50°
Barn Door:	Yes
Gel Clip:	Yes
POWER	
Power Supply:	100~240V AC, 50/60Hz, 75W
Power Connection:	True1 in/out
CONTROL	
Operational Modes:	Manual, Master / Slave & DMX, WDMX (optional)
Display:	4-button LCD control panel
Control Protocol:	DMX512
DMX Channel Mode:	1 / 2 / 7
Control Interface:	5-pin XLR in/out
HOUSING	
Housing Materials:	Die- cast Aluminum Housing
Housing Finishing:	Matte Black
Cooling:	Fanless Cooling with Temperature Protection
Dimensions:	202 x 139 x 193mm / 7.95" x 5.47" x 7.6"
Net Weight:	2.3 kg / 5 lbs

VIEW ONLINE FOR MORE INFORMATION


OPERAC100VWF / OPERAC200VWF


100W AND 200W VARIBLE WHITE COMPACT FRESNEL







	OPERAC100VWF	OPERAC200VWF
Light Source:	100W COB LED	200W COB LED
CRI:	95	95
Beam Angle:	14°~55°	23°~62°
Colour temperature:	3200K-5600K adjustable	3200K-5600K adjustable
PWM:	1,000 Hz - 16,000 Hz optional	1,000 Hz - 16,000 Hz optional
LED Lifespan:	50,000 hours	50,000 hours
EFFECTS		
Dimming:	16 bits 0-100%, 3 dimmer curves optional, dimmer speed optional	16 bits 0-100%, 3 dimmer curves optional, dimmer speed optional
Zoom:	Manual, 14°~55°	Manual, 23°~62°
Optical system:	Glass lens set+ 120 mm Fresnel lens	Glass lens set+ 120 mm Fresnel lens
POWER		
Power Supply:	100~240V AC, 50/60Hz, 100W	100~240V AC, 50/60Hz, 200W
Power Connection:	True1 in/out	True1 in/out
CONTROL		
Operational Modes:	DMX, RDM, Manual	DMX, RDM, Manual
Display:	4-button TFT-LCD control panel	4-button TFT-LCD control panel
Control Protocol:	DMX512	DMX512
Control Interface:	5 pin XLR - in/out	5 pin XLR - in/out
DMX Channels:	1 / 2 / 6 / 9 optional	1 / 2 / 6 / 9 optional
HOUSING		
Housing Materials:	Die-cast aluminum, matte black finish	Die-cast aluminum, matte black finish
Tilt angle:	±90°	±90°
Ambient environment:	-10°C - 40°C	-10°C - 40°C
Cooling:	Silent fan, intelligent automatic temperature regulation system	Silent fan, intelligent automatic temperature regulation system
Net Weight:	6.7kg	8.2kg
IP rate:	IP23	IP23
Dimensions:	289 x 351 x 248mm / 11.38" x 13.82" x 9.76"	328 x 411 x 278mm / 12.91" x 16.18" x 10.94"
Net Weight:	6.7 kg / 15 lbs	8.2 kg / 18 lbs
	8-Leaf Barndoor included	8-Leaf Barndoor included
	Gel Frame included	Gel Frame included









VIEW ONLINE FOR MORE INFORMATION OPERAC100VWF

VIEW ONLINE FOR MORE INFORMATION OPERAC200VWF

FRESNELS


OPERAC100FCF / OPERAC200FCF

100W AND 200W FULL COLOUR COMPACT FRESNEL





	OPERAC100FCF	OPERAC200FCF
Light Source:	100W COB RGBW LED	200W COB RGBW LED
CRI:	90	90
Beam Angle:	22°~62°	14°~55°
LED Lifespan:	50,000 hours	50,000 hours
EFFECTS		
Dimming:	16 bits 0-100%	16 bits 0-100%
Zoom:	Manual, 22°~62°	Manual, 14°~55°
Optical system:	Glass lens set+ 120 mm Fresnel lens	Glass lens set+ 150 mm Fresnel lens
POWER		
Power Supply:	100~240V AC, 50/60Hz, 100W	100~240V AC, 50/60Hz, 200W
Power Connection:	True1 in/out	True1 in/out
CONTROL		
Operational Modes:	DMX, RDM, Manual	DMX, RDM, Manual
Display:	4-button TFT-LCD control panel	4-button TFT-LCD control panel
Control Protocol:	DMX512	DMX512
Control Interface:	5 pin XLR - in/out	5 pin XLR - in/out
DMX Channels:	1 / 2 / 4 / 5 / 7 / 9 / 13 / 9H-CH optional	1 / 2 / 4 / 5 / 7 / 9 / 13 / 9H-CH optional
HOUSING		
Housing Materials:	Die-cast aluminium, matte black finish	Die-cast aluminium, matte black finish
Tilt angle:	±90°	±90°
Ambient environment:	-10°C~40°C	-10°C~40°C
Cooling:	Silent fan, intelligent automatic temperature regulation system	Silent fan, intelligent automatic temperature regulation system
Net Weight:	6.7kg	8.2kg
IP rate:	IP20	IP20
Dimensions:	289 x 351 x 248mm / 11.38" x 13.82" x 9.76"	328 x 411 x 278mm / 12.91" x 16.18" x 10.94"
Net Weight:	6.7 kg / 14 lbs	8.2 kg / 18 lbs
	8-Leaf Barndoor included	8-Leaf Barndoor included
	Gel Frame included	Gel Frame included

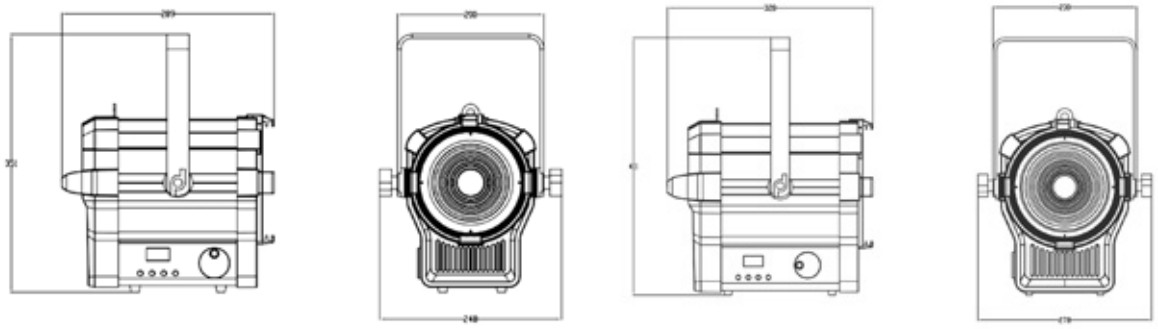

VIEW ONLINE FOR MORE INFORMATION OPERAC100FCF

VIEW ONLINE FOR MORE INFORMATION OPERAC200FCF

OPERAZ200WP / OPERAZ300FCP

200W WARM WHITE AND 300W FULL COLOUR INDOOR PROFILE



Gobo Holder (Optional)

OPERAZGOBOH

Gobo Holder to suit OPERAZ Series Profiles

	OPERAZ200WP	OPERAZ300FCP
Light Source:	200W Warm White LED	300W RGBALC LED
Zoom:	Manual from 15°-40°	Manual from 15°-40°
LED Lifespan:	>50,000 Hours	>50,000 Hours
Colour Temperature:	3100K / 5600K	3100K / 5600K
CRI:	≥90	≥90
Beam Angle:	15°-40°	15°-40°
EFFECTS		
Dimmer:	16-Bit Smooth Linear Dimming	16-Bit Smooth Linear Dimming
Strobe effect:	Yes	Yes
CONTROL		
DMX Channel Modes:	2 Modes	2 Modes
Control Modes:	DMX, Master-Slave, Manual Dimming	DMX, Master-Slave, Manual Dimming
Control Panel:	LCD Display	LCD Display
DMX Connection:	5-pin XLR In/Out	5-pin XLR In/Out
POWER		
Power Connection:	TrueOne In/Out	TrueOne In/Out
Voltage:	100~240V 50/60Hz	100~240V 50/60Hz
Rated power:	250W	350W
HOUSING		
IP Grade:	IP20	IP20
Cooling System:	Quiet Fan (under 25dB @1m) + Copper Tube	Quiet Fan (under 25dB @1m) + Copper Tube
Working Temperature:	-10°C~40°C / 14°F~104°F	-10°C~40°C / 14°F~104°F
Weight:	9.4kg / 21 lbs	9.4kg / 21 lbs
Dimensions:	700 x 235x 270mm / 27.5" x 9.3" x 10.6"	700 x 235x 270mm / 27.5" x 9.3" x 10.6"
	Gel Frame (Included)	Gel Frame (Included)

VIEW ONLINE FOR MORE INFORMATION OPERAZ200WP

VIEW ONLINE FOR MORE INFORMATION OPERAZ300FCP



OPERAZ200WP-IP / OPERAZ400WP-IP / OPERAZ400FCP-IP

200W AND 400W WARM WHITE AND 400W FULL COLOUR OUTDOOR PROFILE



Gobo Holder (Optional)

OPERAZGOBOH


Gobo Holder to suit OPERAZ Series Profiles

	OPERAZ200WP-IP	OPERAZ400WP-IP	OPERAZ400FCP-IP
Light Source:	200W Warm White LED	400W Warm White LED	400W RGBWALC 6in1 COB LED
Zoom:	Manual from 15°-40°	Manual from 15°-40°	Manual from 15°-40°
LED Lifespan:	>50,000 Hours	>50,000 Hours	>50,000 Hours
Colour Temperature:	3100K / 5600K	3100K / 5600K	3100K / 5600K
CRI:	≥90	≥90	≥90
Beam Angle:	15°-40°	15°-40°	15°-40°
EFFECTS			
Dimmer:	16-Bit Smooth Linear Dimming	16-Bit Smooth Linear Dimming	16-Bit Smooth Linear Dimming
Strobe effect:	Yes	Yes	Yes
CONTROL			
DMX Channel Modes:	2 Modes	2 Modes	2 Modes
Control Modes:	DMX, Master-Slave, Manual Dimming	DMX, Master-Slave, Manual Dimming	DMX, Master-Slave, Manual Dimming
Control Panel:	LCD Display	LCD Display	LCD Display
DMX Connection:	5-pin XLR In/Out	5-pin XLR In/Out	5-pin XLR In/Out
POWER			
Power Connection:	TrueOne In/Out	TrueOne In/Out	TrueOne In/Out
Voltage:	100~240V 50/60Hz	100~240V 50/60Hz	100~240V 50/60Hz
Rated power:	250W	250W	450W
HOUSING			
IP Grade:	IP65	IP65	IP65
Cooling System:	Quiet Fan (under 25dB @1m) + Copper Tube	Quiet Fan (under 25dB @1m) + Copper Tube	Quiet Fan (under 25dB @1m) + Copper Tube
Working Temperature:	-10°C~40°C / 14°F~104°F	-10°C~40°C / 14°F~104°F	-10°C~40°C / 14°F~104°F
Weight:	11.3kg / 25 lbs	11.3kg / 25 lbs	11.3kg / 25 lbs
Dimensions:	760 x 235 x 270mm / 29.9" x 9.3" x 10.6"	760 x 235 x 270mm / 29.9" x 9.3" x 10.6"	760 x 235 x 270mm / 29.9" x 9.3" x 10.6"
	Gel Frame (Included)	Gel Frame (Included)	Gel Frame (Included)

VIEW ONLINE FOR MORE INFORMATION OPERAZ200WP-IP

VIEW ONLINE FOR MORE INFORMATION OPERAZ400WP-IP

VIEW ONLINE FOR MORE INFORMATION OPERAZ400FCP-IP

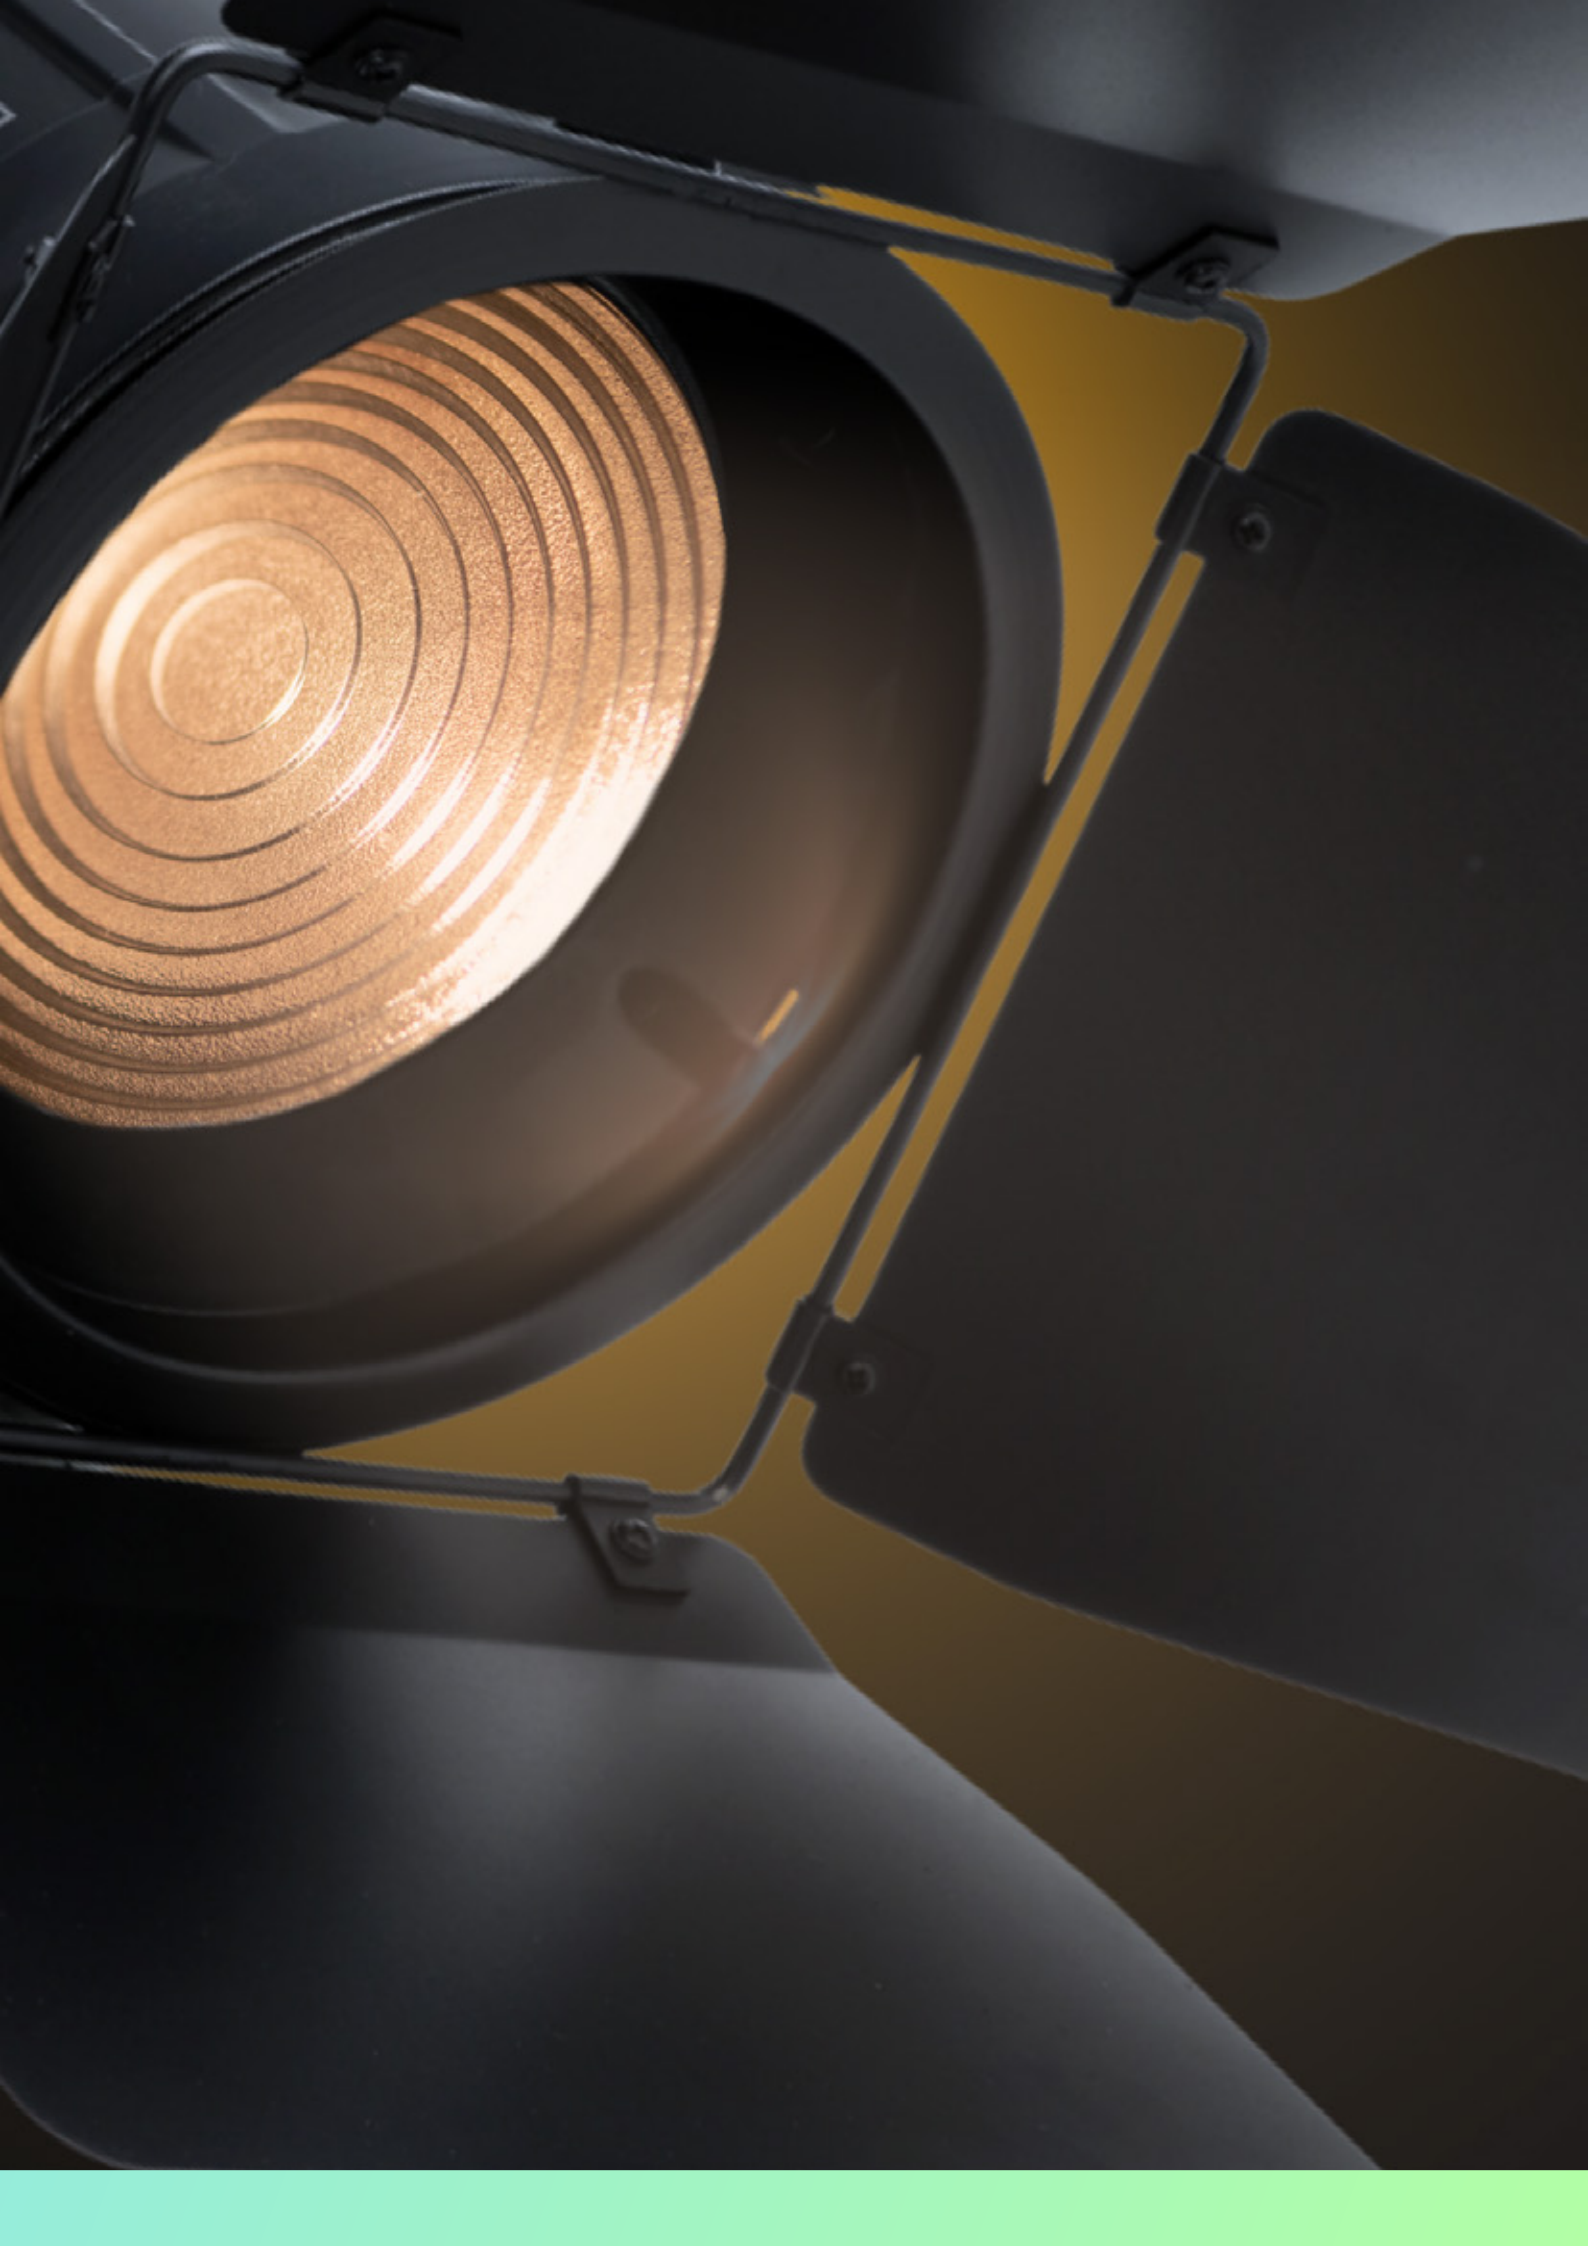



OPERAZ400VWF / OPERAZ400FCF

400W INDOOR FRESNELS





	OPERAZ400VWF	OPERAZ400FCF
Light Source:	400W Variable White LED	400W RGBWALC 6in1 COB LED
Zoom:	Motorised from 15°-45°(DMX or Manually Controlled)	Motorised 15°-45°(DMX or Manually Controlled)
LED Lifespan:	>50,000 Hours	>50,000 Hours
Colour Temperature:	from 2000°K to 8500°K	
CRI:	≥90	≥90
Beam Angle:	15°-45°	15°-45°
EFFECTS		
Dimmer:	16-Bit Smooth Linear	16-Bit Smooth Linear
Strobe effect:	Yes	Yes
CONTROL		
DMX Channel Modes:	12 Channels (RDM Included)	2 Modes
Control Modes:	DMX, Strobe, Master-Slave, Manual Dimming	DMX, Strobe, Master-Slave, Manual Dimming
Control Panel:	4 Buttons and LED Display	LCD Display
DMX Connection:	5-pin XLR In/Out	5-pin XLR In/Out
POWER		
Power Connection:	TrueOne In/Out	TrueOne In/Out
Voltage:	100~240V 50/60Hz	100~240V 50/60Hz
Rated power:	450W	450W
HOUSING		
IP Grade:	IP20	IP20
Cooling System:	Quiet Fan (under 25dB @1m) + Copper Tube	Quiet Fan (under 25dB @1m) + Copper Tube
Working Temperature:	-10°C~40°C / 14°F~104°F	-10°C~40°C / 14°F~104°F
Weight:	9.3kg / 21 lbs	9.3kg / 21 lbs
Dimensions:	450 x 240 x 225mm / 17.7" x 9.4" x 8.9"	450 x 240 x 225mm /17.7" x 9.4" x 8.9"
	Rotatable Barndoor (Included)	Rotatable Barndoor (Included)

VIEW ONLINE FOR MORE INFORMATION OPERAZ400VWF

VIEW ONLINE FOR MORE INFORMATION OPERAZ400FCF

PARF12X25VW-IP

WHITE LEDS WITH ELECTRONIC FROST





Light Source:	12 x 25W White and Warm White LEDs
Beam Angle:	8° (Electronic Frost Included)
Output:	58,500 lux @ 2.0m / 6'6" full on
Refresh Rate:	1,200 Hz
CRI:	95+
EFFECTS	
Electronic Frost:	Yes
Dimming:	5 x 16-bit Dimming Curves
Strobe:	1~30 Hz
POWER	
Input Voltage:	100~240V AC, 50/60 Hz
Power Consumption:	250W
Fuse:	T 2 A, 250V
Power Connections:	TrueOne Input/Output
CONTROL	
Operational Modes:	DMX, WDMX, auto run, sound active, master/slave, manual, static, RDM
Display:	4-button LCD control panel
DMX Protocol:	DMX512
DMX Channel Modes:	1 / 1U / 2 / 5 / 8
DMX Connections:	5-Pin XLR Input/Output
HOUSING	
Housing Materials:	Die-cast aluminium, matte black finish
Cooling:	Fanless Cooling
Dimensions:	299 x 217 x 333mm / 11.77" x 8.54" x 13.11"
Weight:	6.5 kg / 14 lbs
Rigging:	1 x Omega Bracket with ¼ Turn Quick Locks


PARF12X20H-IP

RGBWAU LEDS WITH ELECTRONIC FROST





Light Source:	12 x 20W RGBWAU LEDs
Beam Angle:	10° (Electronic Frost Included)
Output:	12,700 lux @ 2.0m / 6'6" full on
Refresh Rate:	1,200 Hz
CRI:	95+
EFFECTS	
Electronic Frost:	Yes
Dimming:	5 x 16-bit Dimming Curves
Strobe:	1~30 Hz
POWER	
Input Voltage:	100~240V AC, 50/60 Hz
Power Consumption:	250W
Fuse:	T 2 A, 250V
Power Connections:	TrueOne Input/Output
CONTROL	
Operational Modes:	DMX, WDMX, auto run, sound active, master/slave, manual, static, RDM
Display:	4-button LCD control panel
DMX Protocol:	DMX512
DMX Channel Modes:	1 / 2 / 3 / 4W / 4A / 6 8 / 13 / 14
DMX Connections:	5-Pin XLR Input/Output
HOUSING	
Housing Materials:	Die-cast aluminium, matte black finish
Cooling:	Fanless Cooling
Dimensions:	299 x 217 x 333mm / 11.77" x 8.54" x 13.11"
Weight:	6.5 kg / 14 lbs
Rigging:	1 x Omega Bracket with ¼ Turn Quick Locks




VIEW ONLINE FOR MORE INFORMATION PARF12X25VW-IP


VIEW ONLINE FOR MORE INFORMATION PARF12X20H-IP

PAR12X20H-IP / PAR12X20H-IP-WH

OUTDOOR PRO PAR WITH 12 X 20W RGBWAU LEDS









PHOTOMETRICS	
Light Source:	12x 20W RGBWA+UV 6 in 1 LED
Beam Angle:	22°
Output:	12,700 lux @ 2.0m / 6.6 ft full on
PWM:	1,240 Hz
Led lifespan:	50,000 hours
EFFECTS	
Dimming:	5 x 16-bit Dimming Curves
Strobe:	1~30 Hz
POWER	
Power consumption:	250W Max
Input Voltage:	100V~240 V AC, 50/60Hz
Connection:	True1 in/out
CONTROL	
Control Protocol:	DMX512
DMX Channels:	1 / 2 / 3 / 4W / 4A / 6 / 8 / 12 / 14
Interface:	5-pin XLR in / out
Operational Modes:	DMX, WDMX, auto run, sound active, master/ slave, manual colour control, static colour control
Display	4-button LCD control panel
HOUSING	
Materials:	Die-cast aluminium, matte black or white finish
Dimensions:	299 x 217 x 333mm / 11.77" x 8.54"
Cooling:	Fanless Cooling
IP rating:	IP65
Net Weight:	6.5 kg / 14 lbs
Rigging:	1x Omega bracket with 1/4 turn quick locks











Optional Accessories

PAR12X20HIPBD -[WH]

Rotatable Barn Doors with base, gel frame, frost and safety loop



PAR12GELFR

Gel frame for PAR12H/Q/VW



PAR12GELFR

Gel frame for PAR12H/Q/VW



Road Case (Optional)

PAR12X20HIPCASEAF

Road Case to suit 6 units of PAR12X20H-IP Par Cans





VIEW ONLINE FOR MORE INFORMATION


PAR9X12H-IP / PAR9X12H-IP-WH / PAR9X12BH-IP

OUTDOOR PRO PAR WITH 9 X 12W RGBWAU LEDS



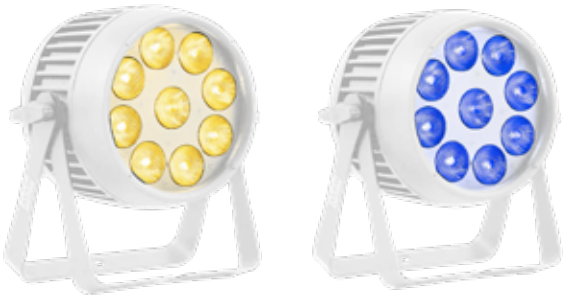

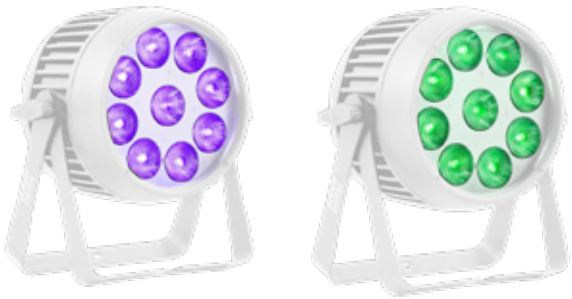

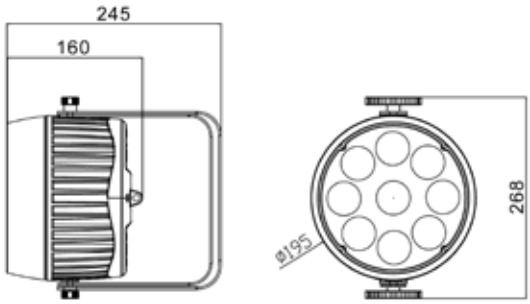



	PAR9X12H-IP	PAR9X12BH-IP
Light Source:	9x 12 W RGBWAU LED	9 x 12W RGBWAU LEDs
Beam Angle:	25°	25°
Output:	2,840 lux @ 2.0m / 6.6 ft full on	2,840 lux @ 2.0m / 6.6 ft full on
PWM:	20,000 Hz	20,000 Hz
Led lifespan:	50,000 hours	50,000 hours
EFFECTS		
Dimming:	0~100%	0~100%
Strobe:	1~20 Hz	1~20 Hz
POWER		
Power consumption:	72W Max	72W Max
Input Voltage:	100V~240 V AC, 50/60Hz	100V~240V AC, 50/60Hz
Connection:	True1 in/out	Seetronic® Outdoor True1 in/out
Battery Operating Time:		16 hours (one colour mode)
		8 hours (colour fading mode)
CONTROL		
Control Protocol:	DMX512, optional WDMX	DMX, manual, auto, master/slave, Wireless DMX, IR Remote Control
DMX Channels:	6 / 10	6 / 10
Interface:	5-pin XLR in / out	
Operational Modes:	DMX, manual, auto, sound active, master/slave	DMX512, Wireless DMX (W-DMX)
Built-in Programming:	4 built-in auto modes	
Display	OLED touch display with glass buttons	OLED touch display with glass buttons
HOUSING		
Materials:	Die-cast aluminium, matte black or white finish	Die-cast aluminium, matte black finish
Dimensions:	268 x 195 x 245mm / 10.55" x 7.68" x 9.65"	268 x 195 x 245mm / 10.55" x 7.68" x 9.65"
Cooling:	Fanless Cooling	Fanless Cooling
IP rating:	IP65	IP65
Net Weight:	3.9kg / 9 lbs	4.75kg / 10 lbs

Road Case (Optional)

PAR9X12OBCAF

Road Case to suit 6 units of PAR9X12H-IP Par Cans



VIEW ONLINE FOR MORE INFORMATION

PAR12H/ PAR12Q / PAR12VW

12 X LED INDOOR RGBWAU / RGBW / CW-VW-A PAR







	PAR12H	PAR12Q	PAR12VW
Light Source:	12x 12W RGBWA+UV LEDs	12x 8W RGBW LEDs	12x 6W CW/WW/A LEDs
Beam Angle:	30° (optional: 55°)		
Output:	3,150 lux @ 2.0m / 6.6ft full on	4,680 lux @ 2.0m / 6.6ft full on	3,270 lux @ 2.0m / 6.6ft full on
PWM:	2,940 Hz	2,940 Hz	2,940 Hz
Led lifespan:	50,000 hours	50,000 hours	50,000 hours
EFFECTS			
Dimming:	5 x 16-bit Dimming Curves	5 x 16-bit Dimming Curves	5 x 16-bit Dimming Curves
Strobe:	1~30 Hz	1~30 Hz	1~30 Hz
POWER			
Power consumption:	120W Max	98W Max	60W Max
Input Voltage:	100~240 V AC, 50/60 Hz	100~240 V AC, 50/60 Hz	100~240 V AC, 50/60 Hz
Connection:	True1 in/out	True1 in/out	True1 in/out
CONTROL			
Control Protocol:	DMX512, WDMX (optional)	DMX512, WDMX (optional)	DMX512, WDMX (optional)
DMX Channels:	1 / 2 / 3 / 4W / 4A / 6 / 8 / 12 / 14	1 / 2 / 3 / 4 / 6 / 10	1 / 2 / 3 / 10
Interface:	5-pin XLR in/out	5-pin XLR in/out	5-pin XLR in/out
Operational Modes:	DMX, WDMX (optional), auto run, sound active, master/slave, manual colour control, static colour control	DMX, WDMX (optional), auto run, sound active, master/slave, manual colour control, static colour control	DMX, WDMX (optional), auto run, sound active, master/slave, manual colour control, static colour control
Display	4-button LCD control panel	4-button LCD control panel	4-button LCD control panel
HOUSING			
Materials:	Die-cast aluminium, matte black or white finish	Die-cast aluminium, matte black or white finish	Die-cast aluminium, matte black or white finish
Dimensions:	263 x 293 x 98mm / 10.35" x 11.54" x 3.86"	263 x 293 x 98mm / 10.35" x 11.54" x 3.86"	263 x 293 x 98mm / 10.35" x 11.54" x 3.86"
Cooling:	Fanless Cooling	Fanless Cooling	Fanless Cooling
IP rating:	IP20	IP20	IP20
Net Weight:	3.2 kg / 7 lbs	3.2 kg / 7 lbs	3.2 kg / 7 lbs
Rigging:	1x omega brackets with 1/4-turn quick locks	1x omega brackets with 1/4-turn quick locks	1x omega brackets with 1/4-turn quick locks

Optional Accessories

PAR12BDKIT -[WH]

Rotatable Barn Doors with base, gel frame, frost and safety loop




PAR12GELFR

Gel frame for PAR12H/Q/VW

PAR12GELFR

Gel frame for PAR12H/Q/VW



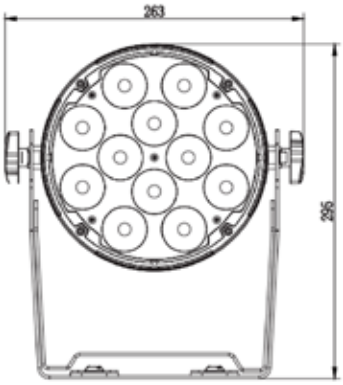

Road Case (Optional)

PAR12CASEWCAF

Road Case to suit 10 units of PAR12 Par Cans



PAR12BDCASEWCAF

Road Case to suit 8 units of PAR12 Par Cans with barn doors



VIEW ONLINE FOR MORE INFORMATION PAR12H

VIEW ONLINE FOR MORE INFORMATION PAR12Q

VIEW ONLINE FOR MORE INFORMATION PAR12VW

PAR5H/ PAR5Q / PAR5VW

5 X LED INDOOR RGBWAU / RGBW / CW-VW-A PAR







	PAR5H	PAR5Q	PAR5VW
Light Source:	5x 12W RGBWA+UV LEDs	5x 8W RGBW LEDs	5x 6W CW/WW/A LEDs
Beam Angle:	30˚ (40˚, 25˚, 15˚ Optional)	30˚ (40˚, 25˚, 15˚ Optional)	30˚ (40˚, 25˚, 15˚ Optional)
Output:	1,420 lux @ 2.0m / 6.6ft full on	2,000 lux @ 2.0m / 6.6ft full on	1,610 lux @ 2.0m / 6.6ft full on
PWM:	2,940 Hz	2,940 Hz	2,940 Hz
Led lifespan:	50,000 hours	50,000 hours	50,000 hours
EFFECTS			
Dimming:	5 x 16-bit Dimming Curves	5 x 16-bit Dimming Curves	5 x 16-bit Dimming Curves
Strobe:	1~30 Hz	1~30 Hz	1~30 Hz
Power			
Power consumption:	50W Max	40W Max	35W Max
Input Voltage:	100~240 V AC, 50/60 Hz	100~240 V AC, 50/60 Hz	100~240 V AC, 50/60 Hz
Connection:	True1 in/out	True1 in/out	True1 in/out
CONTROL			
Control Protocol:	DMX512, WDMX (optional)	DMX512, WDMX (optional)	DMX512, WDMX (optional)
DMX Channels:	1 / 2 / 3 / 4W/ 4A/ 6 / 8 / 12 / 14	1 / 2 / 3 / 4 / 6 / 10	1 / 2 / 3 / 10
Interface:	5-pin XLR in/out	5-pin XLR in/out	5-pin XLR in/out
Operational Modes:	DMX, WDMX (optional), auto run, sound active, master/slave, manual colour control, static colour control	DMX, WDMX (optional), auto run, sound active, master/slave, manual colour control, static colour control	DMX, WDMX (optional), auto run, sound active, master/slave, manual colour control, static colour control
Display	4-button LCD control panel	4-button LCD control panel	4-button LCD control panel
HOUSING			
Materials:	Die-cast aluminium, matte black or white finish	Die-cast aluminium, matte black or white finish	Die-cast aluminium, matte black or white finish
Dimensions:	207 x 227 x 120mm / 8.75" x 8.94" x 4.72"	207 x 227 x 120mm / 8.75" x 8.94" x 4.72"	207 x 227 x 120mm / 8.75" x 8.94" x 4.72"
Cooling:	Fanless Cooling	Fanless Cooling	Fanless Cooling
IP rating:	IP20	IP20	IP20
Net Weight:	1.9 kg / 4 lbs	1.9 kg / 4 lbs	1.9 kg / 4 lbs
Rigging:	1x omega brackets with 1/4-turn quick locks	1x omega brackets with 1/4-turn quick locks	1x omega brackets with 1/4-turn quick locks

Optional Accessories

PAR12BDKIT -[WH]

Rotatable Barn Doors with base, gel frame, frost and safety loop




PAR12GELFR

Gel frame for PAR12H/Q/VW

PAR12GELFR

Gel frame for PAR12H/Q/VW



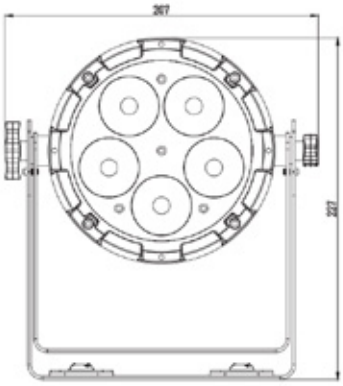

Road Case (Optional)

PAR5CASEWCAF

Road Case to suit 12 units of PAR5 Par Cans



PAR12BDCASEWCAF

Road Case to suit 8 units of PAR12 Par Cans with barn doors



VIEW ONLINE FOR MORE INFORMATION PAR5H

VIEW ONLINE FOR MORE INFORMATION PAR5Q

VIEW ONLINE FOR MORE INFORMATION PAR5VW

PARCANS


PAR12X12L / PAR12X12L-WH / PAR12X8L / PAR12X8L-WH


PAR12X12L: INDOOR LITE SERIES PAR WITH 12 X 12W RGBWAU LEDS
PAR12X8L: INDOOR LITE SERIES PAR WITH 12 X 8W RGBW LEDS





	PAR12X12L	PAR12X8L
Light Source:	12x 12W RGBWAU 6-in-1 LED	12x 8W RGBW 4-in-1 LED
Beam Angle:	40°	40°
Output:	2,580 lux @ 2.0 m / 6.6 ft full on	4,950 lux @ 2.0 m / 6.6 ft full on
PWM:	2,000 Hz	2,000 Hz
Led lifespan:	50,000 hours	50,000 hours
EFFECTS		
Dimming:	Dimming: 0~100%	Dimming: 0~100%
Strobe:	Strobe: 1 - 20 Hz	Strobe: 1 - 20 Hz
POWER		
Power consumption:	60W Max	60W Max
Input Voltage:	100~240V AC, 50/60Hz	100~240V AC, 50/60Hz
Connection:	IEC in/out	IEC in/out
CONTROL		
Control Protocol:	DMX512	DMX512
DMX Channels:	6 / 11	4 / 9
Interface:	3-pin XLR in / out	3-pin XLR in / out
Operational Modes:	Modes: DMX, manual, auto, sound active, IR remote, master/slave	Modes: DMX, manual, auto, sound active, IR remote, master/slave
Display	4-button and 4-digit LED control panel	4-button and 4-digit LED control panel
HOUSING		
Materials:	Die-cast aluminium, matte black or white finish	Die-cast aluminium, matte black or white finish
Dimensions:	221 x 212 x 63.5mm / 8.7" x 8.3" x 2.5"	221 x 212 x 63.5mm / 8.7" x 8.3" x 2.5"
Cooling:	Fanless Cooling	Fanless Cooling
IP rating:	IP20	IP20
Net Weight:	1.85kg / 4 lbs	1.85kg / 4 lbs

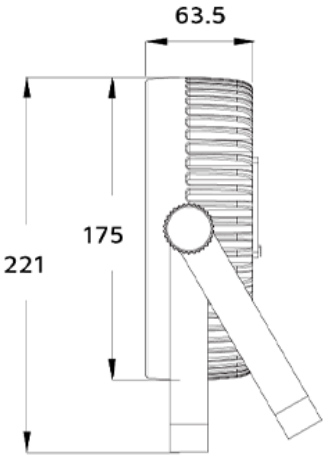

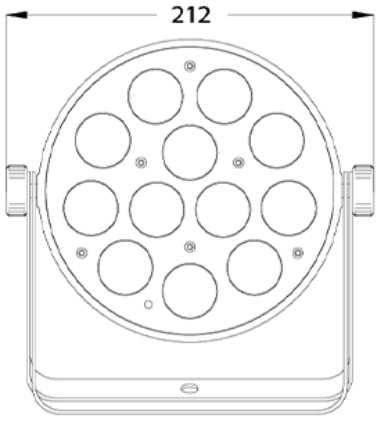



IR REMOTE INCLUDED:



PAR12X12L



PAR12X8L

Optional Accessories

PAR12LBAGAF

Bag for 4pcs of PAR12L Series



VIEW ONLINE FOR MORE INFORMATION PAR12X12L

VIEW ONLINE FOR MORE INFORMATION PAR12X8L

PAR12X4UVL / PAR12X4UVL-WH

INDOOR LITE SERIES PAR WITH 12 X 4W UV LEDS






	PAR12X4UVL
Light Source:	12 x 4W UV LEDs
Beam Angle:	40°
Output:	3,310 lux @ 2.0 m / 6.6 ft full on
PWM:	20,000 Hz
Led lifespan:	50,000 hours
EFFECTS	
Dimming:	0~100%
Strobe:	1~20 Hz
POWER	
Power consumption:	50W Max
Input Voltage:	100V~240 V AC, 50/60Hz
Connection:	IEC in/out (IEC piggy back cable included)
CONTROL	
Control Protocol:	DMX512
DMX Channels:	1 / 2
Interface:	3-pin XLR in / out
Operational Modes:	DMX, manual, auto, sound active, IR remote, master/slave
Built-in Programming:	Yes
Display	4-button and 4-digit LED control panel
HOUSING	
Materials:	Die-cast aluminium, matte black or white finish
Dimensions:	221 x 212 x 62mm / 8.7" x 8.3" x 2.4"
Cooling:	Fanless Cooling
IP rating:	IP20
Net Weight:	1.85kg / 4 lbs

PAR19X12L / PAR19X12L-WH

INDOOR LITE SERIES PAR WITH 19 X 12W RGBWAU LEDS



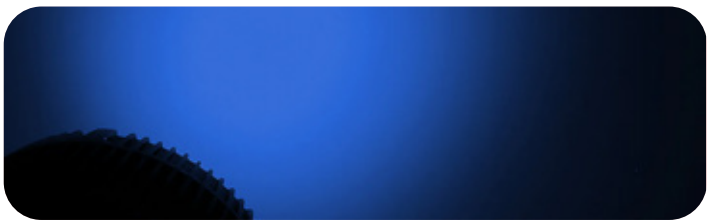

	PAR19X12L
Light Source:	19x 12W RGBWAU 6-in-1 LEDs
Beam Angle:	40°
Output:	3,310 lux @ 2.0 m / 6.6 ft full on
PWM:	20,000 Hz
Led lifespan:	50,000 hours
EFFECTS	
Dimming:	0~100%
Strobe:	1~20 Hz
POWER	
Power consumption:	100W Max
Input Voltage:	100V~240 V AC, 50/60Hz
Connection:	powerCON in/out
CONTROL	
Control Protocol:	DMX512
DMX Channels:	6 / 11
Interface:	3-pin XLR in / out
Operational Modes:	DMX, manual, auto, sound active, IR remote, master/slave
Built-in Programming:	Yes
Display	4-button and 4-digit LED control panel
HOUSING	
Materials:	Die-cast aluminium, matte black or white finish
Dimensions:	275 x 270 x 84mm / 10.8" x 10.6" x 3.3"
Cooling:	Fanless Cooling
IP rating:	IP20
Net Weight:	2.8kg / 2 lbs

Optional Accessories

PAR12LBAGAF

Bag for 4pcs of PAR12L Series



VIEW ONLINE FOR MORE INFORMATION PAR19X12L

VIEW ONLINE FOR MORE INFORMATION PAR19X4UVL

PIXEL BARS

PIXBAR12H / PIXBAR12Q / PIXBAR12VW

INDOOR PIXEL BAR WITH 12 LEDS





	PIXBAR12H	PIXBAR12Q	PIXBAR12VW
Light Source:	12x 12 W RGBWAU LED	12 x 12W RGBW LED	12 x 6W CW/WW/A LED
Beam Angle:	30° (optional: 55°	30° (optional: 55°)	25° (optional: 8°, 15°, 50°)
Output:	2,050 lux @ 2.0m / 6.6 ft full on	2,550 lux @ 2.0m / 6.6 ft full on	4,350 lux @ 2.0m / 6.6 ft full on
PWM:	12,000 Hz	2,940Hz	12,000 Hz
Led lifespan:	50,000 hours	50,000 hours	50,000 hours
EFFECTS			
Dimming:	4 x 16-bit Dimming Curves	4 x 16-bit Dimming Curves	4 x 16-bit Dimming Curves
Strobe:	1~30 Hz	1~30 Hz	1~30 Hz
POWER			
Power consumption:	150W Max	120W Max	75W Max
Input Voltage:	100~240 V AC, 50/60 Hz	100~240 V AC, 50/60 Hz	100~240 V AC, 50/60 Hz
Connection:	True1 in/out	True1 in/out	True1 in/out
CONTROL			
Control Protocol:	DMX512, optional WDMX	DMX512, optional WDMX	DMX512, optional WDMX
DMX Channels:	3 / 4 / 4A / 8 / 12 / 24 / 72 / 74	3 / 4 / 6 / 8 / 9 /12 / 16 / 24 / 48 / 50	1 / 2 / 3 / 10 / 12 / 12P / 36 / 38
Interface:	3-pin and 5-pin XLR in/out	3-pin and 5-pin XLR in/out	3-pin and 5-pin XLR in/out
Operational Modes:	DMX, manual, auto, sound active, master/slave, multi fixture chase	DMX, manual, auto, sound active, master/slave, multi fixture chase	DMX, manual, auto, sound active, master/slave, multi fixture chase
Display	4-button LCD control panel	4-button LCD control panel	4-button LCD control panel
HOUSING			
Materials:	Aluminium, matte black or white finish	Aluminium, matte black or white finish	Aluminium, matte black or white finish
Dimensions:	1050 x 165 x 80mm / 41.34" x 6.50" x 3.15"	1050 x 165 x 80mm / 41.34" x 6.50" x 3.15"	1050 x 165 x 80mm / 41.34" x 6.50" x 3.15"
Cooling:	Fanless Cooling	Fanless Cooling	Fanless Cooling
IP rating:	IP20	IP20	IP20
Net Weight:	4.5 kg / 10 lbs	4.5 kg / 10 lbs	4.5 kg / 10 lbs

Road Case (Optional)

PIXBAR12CASE6WCAF

Road Case to suit 6 pcs
PIXBAR12 including clamps



Accessories Included

BARN DOOR AND FROST FILTER






VIEW ONLINE FOR MORE INFORMATION PIXBAR12H

VIEW ONLINE FOR MORE INFORMATION PIXBAR12Q

VIEW ONLINE FOR MORE INFORMATION PIXAR12VW

PIXBAR6H / PIXBAR6VW

INDOOR PIXEL BAR WITH 6 LEDS

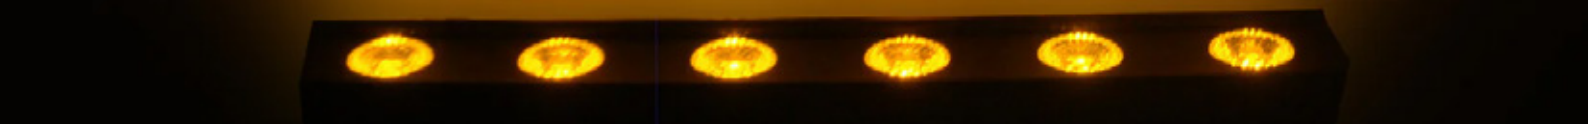





	PIXBAR6H	PIXBAR6VW
Light Source:	6 x 12 W RGBWAU LED	6 x 6W CW/WW/A LED
Beam Angle:	30° (optional: 55°)	25° (optional: 8/15°/50°)
Output:	1,280 lux @ 2m / 6.6 ft full on	2,070 lux @ 2m / 6.6 ft CW/WW/A full on
PWM:	12,000 Hz	12,000 Hz
Led lifespan:	50,000 hours	50,000 hours
EFFECTS		
Dimming:	4 Dimming Curves	4 Dimming Curves
Strobe:	1~30 Hz	1~30 Hz
POWER		
Power consumption:	60W Max	35W Max
Input Voltage:	100~240 V AC, 50/60 Hz	100~240 V AC, 50/60 Hz
Connection:	True1 in/out	True1 in/out
CONTROL		
Control Protocol:	DMX512, optional WDMX	DMX512, optional WDMX
DMX Channels:	3 / 4W / 4A / 6 / 8 / 12 / 36 / 38	1 / 2 / 3 / 10 / 12 / 12P / 36 / 38
Interface:	5-pin XLR in/out	5-pin XLR in/out
Operational Modes:	DMX, manual, auto, sound active, master/slave, multi fixture chase	DMX, manual, auto, sound active, master/slave, multi fixture chase
Display	4-button LCD control panel	4-button LCD control panel
HOUSING		
Materials:	Aluminium, matte black or white finish	
Dimensions:	568 x 165 x 80mm / 22.36" x 6.50" x 3.15"	568 x 165 x 80mm / 22.36" x 6.50" x 3.15"
Cooling:	Fanless Cooling	Fanless Cooling
IP rating:	IP 20	IP 20
Net Weight:	2.6 kg / 6 lbs	2.6 kg / 6 lbs

Road Case (Optional)

PIXBAR12CASE6WCAF

Road Case to suit 6 pcs
PIXBAR12 including clamps



Accessories Included

BARN DOOR AND FROST FILTER





VIEW ONLINE FOR MORE INFORMATION PIXBAR6H

VIEW ONLINE FOR MORE INFORMATION PIXBAR6VW

PIXEL BARS

PIXBAR40FXT / BLITZBARFX

PIXBAR40FXT: INDOOR PIXEL BAR WITH 40 X 3W RGB LEDS
BLITZBARFX: INDOOR LED BAR WITH ELECTRONIC FROST EFFECT AND STROBE BAR





	PIXBAR40FXT	BLITZBARFX
Light Source:	40 x 3W RGB LED	384 x White LEDs & 384 x RGB LEDs
Beam Angle:	14˚	80°
Output:	5,968 lux @ 2m / 6.6 ft	5,968 lux @ 2m / 6.6 ft
Refresh Rate:	4,000 Hz	10,000Hz
LED Life:	50,000 hours	50,000 hours
EFFECTS		
Dimming:	5 x 16-bit Dimming Curves	0-100% linear dimming
Strobe:	1~25Hz	1~30Hz
		64-segment Pixel Control
Frost:		Electronic
POWER		
Input Voltages:	100~240V AC, 50/60Hz, 150W	100~240V AC, 50/60Hz, 450W
Power Consumption:	80W	80W
Power Connection:	True1 in/out	True1 in/out
CONTROL		
Operation Modes:	DMX, manual, auto, sound active, master/slave, multi fixture chase, RDM*	DMX, manual, auto, master/slave
Display:	4-button LCD control panel	4-button LCD control panel
Control Protocol:	DMX512	DMX512
DMX Channels:	1 / 3 / 8 / 120 / 122	7 / 18 / 21 / 22 / 256 / 269
Control Interface:	5-pin XLR in/out	5-pin XLR in/out
Software Upgrade via DMX:	Yes	Yes
HOUSING		
Housing Materials:	Aluminium, matte black finish	Aluminium, matte black finish
Brackets:		Adjustable width, angle
Barndoor:	Included	Included
Frost filter:	Included	Included
IP Rate:		IP20
Cooling:	Fanless Cooling, Temperature Protection	Fanless Cooling, Temperature Protection
Dimension:	992 x 152 x 78mm / 39.06” x 5.98” x 3.07”	1000 x 135 x 145mm / 39.37" x 5.31" x 5.71"
Net Weight:	2.0 kg / 4 lbs	6.8 kg / 15 lbs

VIEW ONLINE FOR MORE INFORMATION PIXAR40FXT

VIEW ONLINE FOR MORE INFORMATION BLITZBARFX

BAR24X4L / BAR24X4FXL / BAR224FXL

BAR24X4L: INDOOR LITE SERIES PIXEL BAR WITH 24 X 4W RGBW LEDS
BAR24X4FXL: INDOOR LITE SERIES PIXEL BAR WITH 24 X 4W RGBW LEDS + 120 X 0.2 RGB LEDS
BAR224FXL: INDOOR LITE SERIES PIXEL BAR WITH 224 X SMD RGB LEDS




BAR24X4L / BAR24X4FXL



BAR224FXL

	BAR24X4L	BAR24X4FXL	BAR224FXL
Light Source:	24x 4W RGBW LEDs	24 x 4W RGBW LEDs + 120 x 0.2W RGB LEDs	224 x SMD 5050 RGB LEDs
Beam Angle:	35°	45° (RGBW LEDs) / 25° (RGB LEDs)	90°
PWM:	10,000Hz	10,000Hz	10,000Hz
LED Life:	50,000 Hours	50,000 Hours	50,000 Hours
POWER			
Input Voltages:	110-240V AC, 50/60 Hz	110-240V AC, 50/60 Hz	110-240V AC, 50/60 Hz
Power Consumption:	100W	150W	150W
CONTROL			
Operation Modes:	DMX, manual, auto, master/slave	DMX, auto, manual, sound active, master/slave, RDM	DMX, auto, manual, sound active, master/slave, RDM
DMX Channels:	6 / 9 / 16 / 30 / 58	8 / 15 / 40 / 80 / 128	3 / 5 / 8 / 24 / 48 / 53
Control Interface:	3-pin XLR in/out	3-pin XLR in/out	3-pin XLR in/out
HOUSING			
IP Rating:	IP20	IP20	IP20
Dimension:	1100 x 90 x 65mm / 43.31" x 3.54" x 2.56"	1100 x 90 x 65mm / 43.31" x 3.54" x 2.56"	1100 x 90 x 65mm / 43.31" x 3.54" x 2.56"
Net Weight:	4.5 kg / 10 lbs	4.5 kg / 10 lbs	3.5 kg / 8 lbs

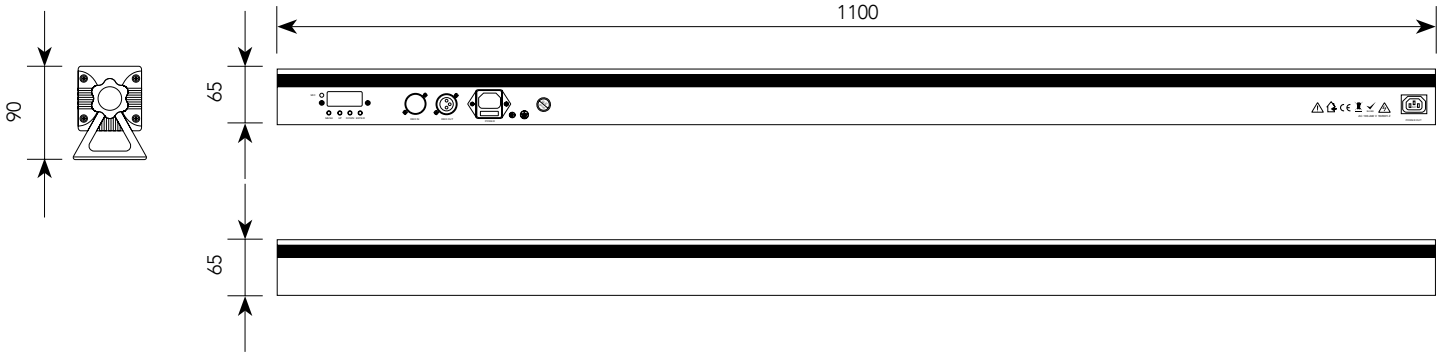

Stand (Optional)

XSTANDM8
X' floor stand with M8 thread to suit BAR24X4L + various fixtures



VIEW ONLINE FOR MORE INFORMATION BAR24X4L

VIEW ONLINE FOR MORE INFORMATION BAR24X4FXL

VIEW ONLINE FOR MORE INFORMATION BAR224FXL

FLOOD LIGHTS



VERVEBAR 18X12Q-IP / VERVEWASH 24X10Q-IP

VERVEBAR18X12Q-IP: OUTDOOR LITE SERIES PIXEL BAR WITH 18 X 12W RGBW LEDS
VERVEWASH24X10Q-IP: OUTDOOR LITE SERIES WASH WITH 24 X 10W RGBW LEDS





	VERVEBAR 18X12Q-IP	VERVEWASH 24X10Q-IP
Light Source:	18 x 12W RGBW LEDs	24 x 10W RGBW LEDs
Beam Angle:	25°	25°
LED Lifespan:	50,000 Hours	50,000 Hours
Operation Modes:	DMX, auto, manual, sound active, master/slave	DMX, auto, manual, sound active, master/slave
Data Connection:	5-pin XLR Input/Output	5-pin XLR Input/Output
DMX Channels:	4 / 8 / 10 / 11 / 108 / 110	4 / 6 / 8 / 10 / 32
Power Connection:	TrueOne Input/Output (cable included)	TrueOne Input/Output (cable included)
Input Voltage:	110-240V AC, 50/60 Hz	110-240V AC, 50/60 Hz
Power Consumption:	180W	160W
IP Rating:	IP65	IP65
Housing Material:	Die-cast Aluminium	Die-cast Aluminium
Dimensions:	1,009.5 x 125 x 163 mm / 39.7″ x 4.9″ x 6.4″	360 x 268.5 x 150 mm / 14.1″ x 10.6″ x 5.9″
Weight:	9.5 kg / 21 lbs	8.5 kg / 19 lbs
	2 x Omega Brackets included	1 x Omega Bracket included

VIEW ONLINE FOR MORE INFORMATION VERVEBAR 18X12Q-IP

VIEW ONLINE FOR MORE INFORMATION VERVEWASH 24X10Q-IP

DELUGE24X12H / DELUGE24X12BH

BRICK STYLE WASH WITH 24 X 12W RGBWAU LEDS



	DELUGE 24X12H	DELUGE 24X12BH
Light Source:	24 x 12W RGBWAU LEDs	24 x 12W RGBWAU LEDs
Beam Angle:	30°	30°
PWM:	20,000Hz	20,000Hz
Output:	34,200 Lux @ 1m / 3.3ft at 30˚	High power mode: 27,000 lux @ 1m / 3.3 ft at 30˚
		Normal power mode: 21,300 lux @ 1m / 3.3 ft at 30˚
LED Lifespan:	50,000 hours	50,000 hours
EFFECTS		
Dimming:	0-100%	0-100%
Strobe:	1-20Hz	1-20Hz
Power		
Input Voltage:	100-240V AC, 50/60Hz	100-240V AC, 50/60Hz
Power Consumption:	288W	288W
Connection:	Seetronic True1 outdoor in/out	Seetronic True1 outdoor in/out
Battery:		24,000 mAh, 24V
Battery Charge Time:		6.5 hours
CONTROL		
Operation Modes:	DMX, Wireless DMX, auto	DMX, Wireless DMX, auto
DMX Channels:	6 / 11	6 / 11
Control Interface:	Outdoor 5-pin XMR in/out	Outdoor 5-pin XMR in/out
Built-in Programming:	4 auto modes	4 auto modes
Display:	4-button LCD	4-button LCD
HOUSING		
Materials:	Die-cast aluminium, matte black finish	Die-cast aluminium, matte black finish
	Omega bracket included	Omega bracket included
Cooling:	Fanless	Fanless
IP Rating:	IP65	IP65
Dimensions:	426 x 138 x 299mm / 16.77" x 5.43" x 11.77"	426 x 138 x 299mm
Net Weight:	9 kg / 20 lbs	10.7 kg / 24 lbs



Accessories (Optional)

BARN DOOR DEL24BD

FILTER FRAME DEL24DIF40, DEL24DIF60X25

ALTERNATIVE LENSES FOR DIFFERENT OUTPUT*: LENS15DELPK

DEL24CASE4AF

Road case to suit 4 units



VIEW ONLINE FOR MORE INFORMATION DELUGE24X12H


VIEW ONLINE FOR MORE INFORMATION DELUGE24X12BH

FLOOD LIGHTS

DELUGE24X20Q

BRICK STYLE WASH WITH 24 X 20W RGBW LEDS



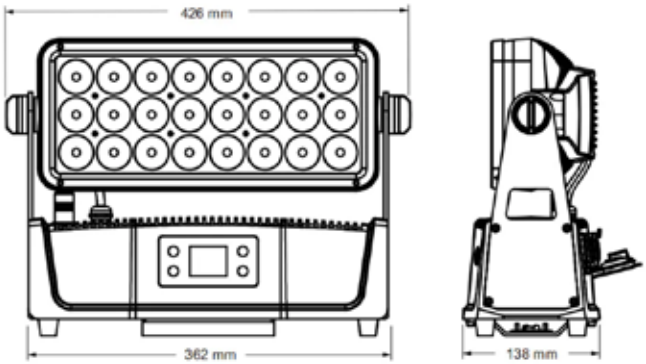



PHOTOMETRICS	
Light Source:	24 x 20W RGBW LEDs
Beam Angle:	25°
PWM:	20,000Hz
LED Lifespan:	50,000 hours
Output:	55,400 Lux @ 1m / 3.3ft at 25˚
EFFECTS	
Dimming:	0-100%
Strobe:	1-20Hz
POWER	
Input Voltage:	100-240V AC, 50/60Hz
Power Consumption:	360W Max
Connection:	Seetronic True1 outdoor in/out
CONTROL	
Operation Modes:	DMX, Wireless DMX, auto
DMX Channels:	4 / 9
Control Interface:	Outdoor 5-pin XLR in/out
Built-in Programming:	4 auto modes
Display:	4-button LCD control panel
HOUSING	
Materials:	Die-cast aluminium, matte black finish
	Omega bracket included
Cooling:	2 x Fan
IP Rating:	IP65
Dimensions:	426 x 138 x 299mm / 16.77" x 5.43" x 11.77"
Net Weight:	9 kg / 20 lbs



Optional Accessories


Barn door DEL24BD
Filter frame DEL24DIF40, DEL24DIF60X25
Roadcase for 4 units DEL24CASE4AF
Alternative Lenses for different Output*: LENS10DELPK, LENS15DELPK
** Alternative lenses may be requested upon order for no additional fee. For customers with existing products, the lenses may be changed incurring a service fee.*


VIEW ONLINE FOR MORE INFORMATION


PANX44 / PANX44-WH

INDOOR PIXEL PANEL WITH 4 ROWS OF 4 X 40W LEDS



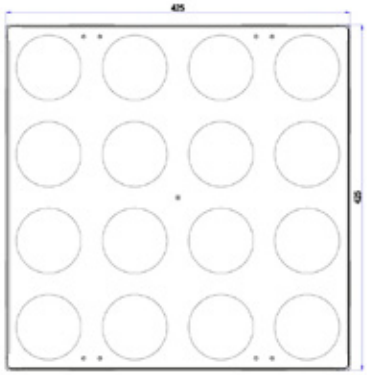



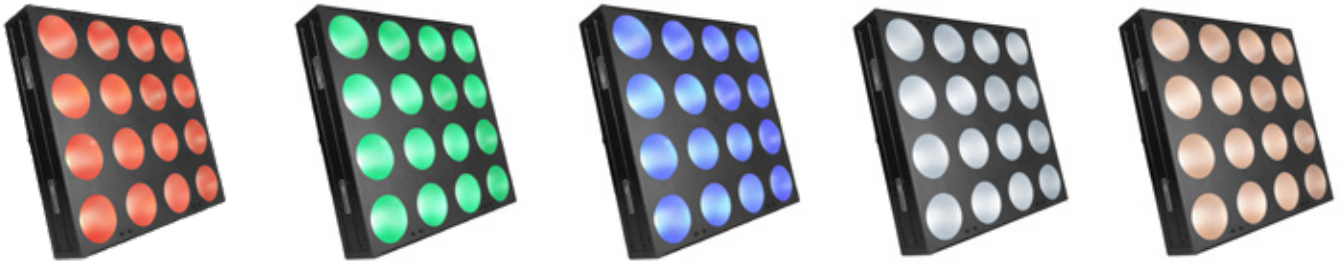

PHOTOMETRICS	
Light Source:	4 x 4 40W RGB+CW+WW COB LEDs
Beam Angle:	40°
Field Angle:	60°
Output:	9,100 lux @ 2m / 6.6ft full on
PWM:	1,200 Hz
Led lifespan:	50,000 hours
EFFECTS	
Dimming:	5 x 16-bit Dimming Curves
Strobe:	1~25 Hz
POWER	
Power consumption:	400W Max
Input Voltage:	100~240 V AC, 50/60 Hz
Connection:	True1 in/out
CONTROL	
Control Protocol:	DMX512, optional WDMX
DMX Channels:	1 / 2 / 3 / 4CW / 4WW / 8 / 11 / 82
Interface:	3-pin and 5-pin XLR in/out
Operational Modes:	DMX, manual, auto, sound active, master/slave, multi fixture chase, WDMX (optional)
Display	4-button LCD control panel
Software Upgrade via DMX:	Yes
HOUSING	
Materials:	Aluminium, matte black or white finish
Cooling:	4 Fans
IP rating:	IP20
Dimensions:	425 x 425 x 141 mm / 16.7 x 16.7 x 5.6"
Net Weight:	10.7 kg / 24 lbs
Rigging:	1x Omega bracket with 1/4 turn quick locks
	Coffin Latch - All Sides with Hex key (included)







Rigging Accessories (Included)

Omega bracket with 1/4 turn quick locks

Hex Key



VIEW ONLINE FOR MORE INFORMATION





PANX41 / PANX41-WH

INDOOR PIXEL PANEL WITH 1 ROW OF 4 X 40W LEDS



PHOTOMETRICS	
Light Source:	4 x 1 40W RGB+CW+WW COB LEDs
Beam Angle:	40°
Field Angle:	60°
Output:	1,930 lux @ 2m / 6.6ft full on
PWM:	1,200 Hz
Led lifespan:	50,000 hours
EFFECTS	
Dimming:	5 x 16-bit Dimming Curves
Strobe:	1~25 Hz
POWER	
Power consumption:	120W Max
Input Voltage:	100~240 V AC, 50/60 Hz
Connection:	True1 in/out
CONTROL	
Control Protocol:	DMX512, optional WDMX
DMX Channels:	1 / 2 / 3 / 4CW / 4WW / 8 / 11 /22
Interface:	5-pin XLR in/out
Operational Modes:	DMX, manual, auto, sound active, master/slave, multi fixture chase, WDMX (optional)
Display	4-button LCD control panel
Software Upgrade via DMX:	Yes
HOUSING	
Materials:	Aluminium, matte black or white finish
Cooling:	Fanless
IP rating:	IP20
Dimensions:	425 x 197 x 183 mm / 16.7 x 7.8 x 7.2"
Net Weight:	4.3 kg / 10 lbs
Rigging:	1x Omega bracket with 1/4 turn quick locks
	Coffin Latch - Top+Bottom with Hex key (included)







Rigging Accessories (Included)

Omega bracket with 1/4 turn quick locks

Hex Key



VIEW ONLINE FOR MORE INFORMATION



PANX22 / PAN22X-WH

INDOOR PIXEL PANEL WITH 2 ROWS OF 2 X 40W LEDS





PHOTOMETRICS	
Light Source:	2 x 2 40W RGB+CW+WW COB LEDs
Beam Angle:	40°
Field Angle:	60°
Output:	1,965 lux @ 2m / 6.6ft full on
PWM:	1,200 Hz
Led lifespan:	50,000 hours
EFFECTS	
Dimming:	5 x 16-bit Dimming Curves
Strobe:	1~25 Hz
Power	
Power consumption:	120W Max
Input Voltage:	100~240 V AC, 50/60 Hz
Connection:	True1 in/out
CONTROL	
Control Protocol:	DMX512, optional WDMX
DMX Channels:	1 / 2 / 3 / 4CW / 4WW / 8 / 11 /22
Interface:	3-pin and 5-pin XLR in/out
Operational Modes:	DMX, manual, auto, sound active, master/slave, multi fixture chase, WDMX (optional)
Display	4-button LCD control panel
Software Upgrade via DMX:	Yes
HOUSING	
Materials:	Aluminium, matte black or white finish
Cooling:	Fanless
IP rating:	IP20
Dimensions:	213 x 213 x 136 mm / 8.4 x 8.4 x 5.4"
Net Weight:	3.85 kg / 9 lbs
Rigging:	1x Omega bracket with 1/4 turn quick locks
	Coffin Latch - All Sides with Hex key (included)





Rigging Accessories (Included)

Omega bracket with 1/4 turn quick locks

Hex Key



VIEW ONLINE FOR MORE INFORMATION

PIXEL PANELS

PANX21 / PANX21 WH

INDOOR PIXEL PANEL WITH 1 ROW OF 2 X 40W LEDS





PHOTOMETRICS	
Light Source:	2 x 1 40W RGB+CW+WW COB LEDs
Beam Angle:	40°
Field Angle:	60°
Output:	1,066 lux @ 2m / 6.6ft full on
PWM:	1,200 Hz
Led lifespan:	50,000 hours
EFFECTS	
Dimming:	5 x 16-bit Dimming Curves
Strobe:	1~25 Hz
POWER	
Power consumption:	50W Max
Input Voltage:	100~240 V AC, 50/60 Hz
Connection:	True1 in/out
CONTROL	
Control Protocol:	DMX512, optional WDMX
DMX Channels:	1 / 2 / 3 / 4CW / 4WW / 8 / 11 /12
Interface:	5-pin XLR in/out
Operational Modes:	DMX, manual, auto, sound active, master/slave, multi fixture chase, WDMX (optional)
Display	4-button LCD control panel
Software Upgrade via DMX:	Yes
HOUSING	
Materials:	Aluminium, matte black or white finish
Cooling:	Fanless
IP rating:	IP20
Dimensions:	213 x 168 x 197 mm / 8.4 x 6.6 x 7.6"
Net Weight:	2.5 kg / 6 lbs
Rigging:	1x Omega bracket with 1/4 turn quick locks
	Coffin Latch - Top+Bottom with Hex key (included)





Rigging Accessories (Included)

Omega bracket with 1/4 turn quick locks

Hex Key



VIEW ONLINE FOR MORE INFORMATION

HYBRICK-BL / HYBRICK-FX / HYBRICK-WASH







	HYBRICK-BL	HYBRICK-FX	HYBRICK-WASH
Light Source:	2 pcs of 200W COB Warm white and cool white LED (2700K+6500K) + 64 pcs of 0.1w AMBER (32 LEDs x 2 segments)	432 pcs of 1.5W RGB LEDs (Upper Zone: 9 LEDs x 24 segments; Bottom Zone: 9 LEDs x 24 segments) + 84 pcs of 5;warm white LEDs (7 LEDs x 12 segments) Colour Temp (Warm White): 3250K	36 pcs of 10W RGBWS (S=warm white) LEDs, W:6000K, S:2500K,
CRI:	95+		95+
Beam Angle:	53°	RGB 120°, Warm White:60°	
Field Angle:	85°		
Output:	27300 @ 1m, 6860 @ 2m / 6.6ft	8800 @ 1m, 2205 @ 2m / 6.6ft	82,800 @ 1m, 24,400 @ 2m / 6.6ft
PWM:	1200 Hz	4000 Hz	1200 Hz
LED Life:	50,000 hours	50,000 hours	50,000 hours
Lens:			35mm, 20° (12°, 40° Optional)
EFFECTS			
Dimming:	5 x 16bit digital Dimming Curves	5 x 16bit digital Dimming Curves	5 x 16bit digital Dimming Curves
Strobe:	1 - 25 Hz	1 - 25 Hz	1 - 25 Hz
CONTROL			
Operational Modes:	Static, Colour Fade, Auto Program, Sound Active, Master / Slave & DMX Modes, RDM, WDMX	Static, Colour Fade, Auto Program, Sound Active, Master / Slave & DMX Modes, RDM, WDMX	Static, Colour Fade, Auto Program, Sound Active, Master / Slave & DMX Modes, RDM, WDMX
Display:	4-button LCD Display Control Panel	4-button LCD Display Control Panel	4-button LCD Display Control Panel
DMX Protocol:	DMX512	DMX512	DMX512
DMX Channel Mode:	1 / 1U /2 / 5 / 7/ 8 / 10	1 / 2 / 3 / 4 / 14 / 15 / 50 / 146 / 158	1 / 2 / 3 / 4W / 4S / 5 / 7 / 12 / 13 / 32
DMX Interface:	5-Pin XLR	5-Pin XLR	5-Pin XLR
Software Upgrade via DMX:	Yes	Yes	Yes
POWER			
Input Voltages:	100V~240V AC,50/60Hz	100V~240V AC,50/60Hz	100V~240V AC,50/60Hz
Power Consumption:	400W	400W	400W
Power Connection:	True 1 Power Input and Output	True 1 Power Input and Output	True 1 Power Input and Output
HOUSING			
Housing Materials:	Aluminium Housing	Aluminium Housing	Aluminium Housing
Housing finish:	Matte Black	Matte Black	Matte Black
Cooling:	2 Fans	2 Fans	2 Fans
Dimension:	372 x 186 x 146.2mm / 14.65" x 7.32" x 5.76"	372 x 186 x 146.2mm / 14.65" x 7.32" x 5.76"	372 x 186 x 146.2mm / 14.65" x 7.32" x 5.76"
Net Weight:	8.1 kg / 18 lbs	8.1 kg / 18 lbs	8.1 kg / 18 lbs
RIGGING			
	Double yokes (can stand on the floor alone or hang up horizontally)		
	Mounting point on the top and bottom for bracket to be hung vertically		
	Cam locks for 1/4 turn Omega Bracket on the side and back		
	6 coffin locks +3 tool free lock handles for multi-fixtures linking and hanging horizontally and vertically		
	1 x Omega bracket included		

VIEW ONLINE FOR MORE INFORMATION HYBRICK-BL

VIEW ONLINE FOR MORE INFORMATION HYBRICK-FX


VIEW ONLINE FOR MORE INFORMATION HYBRICK-WASH


FESTOON

PIXBALLS2 - IP65

RGB FESTOON LIGHTING SYSTEM



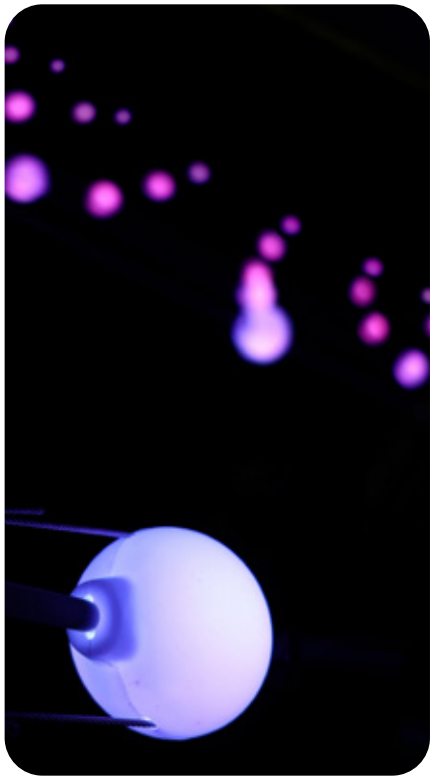

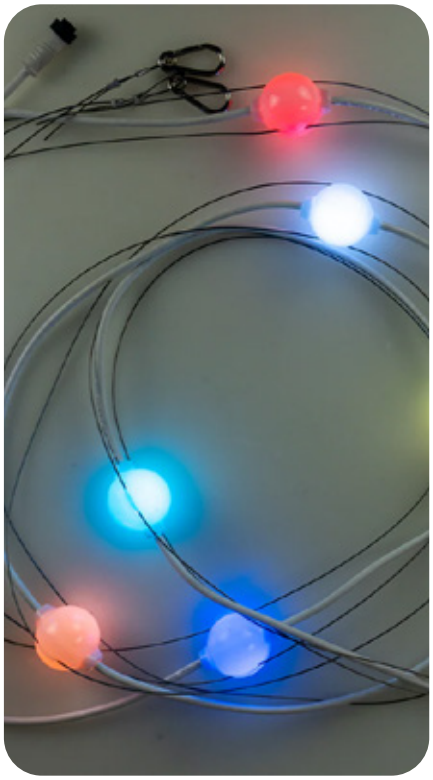

VIEW ONLINE FOR MORE INFORMATION


Ball Size:	46mm / 1.81"
Ball Spacing:	50cm / 1.5ft
String Length:	5m / 16.4ft
Light Source:	6 x 0.3W RGB LEDs/ball
Viewing Angle:	360°
Control Protocol:	DMX512
DMX Channels:	30/string
Cable:	5-pin white outdoor cable
Input Voltage:	24V DC
Power Consumption:	15W/string
Ball Housing:	Opal PC
IP Rating:	IP65

The modern interpretation of festoon lighting with each ball containing RGB LEDs and being individually controllable with DMX. Outdoor rated with twin catenary wire.

Additional Accessories (Optional)



ARCW
Programmer and Controller



IP2DMX
DMX Adaptor



IP2T
T cable



IP2EXT
Extension cable



IP2PSU150
Power supply



FES10 / FES10WH

FESTOON STRING

Event Lighting FES10 is a 10m / 32.8ft black Festoon String with 1m / 6.6ft spacing, E27 Base and an IP44 rating. 10 bulbs per string.

The front to the first socket is 0.5m / 1.5ft. The last socket to the end of the Festoon string is 0.5m.

The festoon cable is rated at 6 amps. One power cable will handle up to 720m / 787.4yd using the LED festoon globes, or 200m / 218.7yd using the filament globes.

Globes and power leads are sold separately.

VIEW ONLINE FOR MORE INFORMATION FES10WH

VIEW ONLINE FOR MORE INFORMATION FES10

Additional Accessories (Optional)

BLACK
FESPL - Festoon Power Lead
FESEX10 - Festoon Power Lead

OPTIONAL GLOBES:
FESLED2WWX12 - LED Globe 2W (Box of 12)
FESFIL7WWX12 - Filament Globe 7W (Box of 12)

WHITE
FESPLWH - Festoon Power Lead White
FESEX10WH - Festoon Power Lead White

OPTIONAL GLOBES:
FESLED2WW - LED Globe 2W
FESFIL7WW - Filament Globe 7W





APRO2 / APRO4 / APRO8 / APRO4-IP

ARTNET NODES






	APRO2	APRO4	APRO8	APRO4-IP
CONTROL	Art-net / sACN / DMX / RDM	Art-net / sACN / DMX / RDM	Art-net / sACN / DMX / RDM	Art-net / sACN / DMX / RDM
	Configurable from web browser, software upgradable	Configurable from web browser, software upgradable	Configurable from web browser, software upgradable	Configurable from web browser, software upgradable
INTERFACE	1 x RJ45 Ethernet interface with POE(POE 802.3af)	2 x RJ45 Ethernet interface with POE (DC12V 2A)	2 x RJ45 Ethernet interface with POE (DC12V 2A), 4 x 5-pin XLR out	2 x RJ45 Ethernet interface with POE (DC12V 2A)
	2 x 5-pin XLR out	4 x 5-pin XLR out	8 x 5-pin XLR out	4 x 5-pin XLR out
	2.4G Wifi support Matrix or ArtNet APP control			
DISPLAY	LCD display with rotary menu wheel	LCD display with rotary menu wheel	LCD display with rotary menu wheel	LCD display with rotary menu wheel
POWER	100-240V AC, 50/60 Hz, 2.5W	100-240V AC, 50/60 Hz, 4.8W	100-240V AC, 50/60 Hz, 9W	100-240V AC, 50/60 Hz, 0.5A, 4.2W
POWER INTERFACE	True1 in or POE	True1 Input	True1 Input	True1 Input
DIMENSIONS	105 x 172 x 52 mm / 4.13" x 6.77" x 2.05"	220 x 182 x 44 mm / 8.66" x 7.17" x 1.73"	482.25 x 133.7 x 43.55 mm	215.3 x 150 x 42mm / 8.48" x 5.91" x 1.65"
WEIGHT	1.13 kg / 3 lbs	1.63 kg / 4 lbs	2.65 kg / 6 lbs	1.43 kg / 3 lbs

VIEW ONLINE FOR MORE INFORMATION APRO2

VIEW ONLINE FOR MORE INFORMATION APRO4

VIEW ONLINE FOR MORE INFORMATION APRO8

WPRORXIP, WPROTXIP, WPROTRX, WPROTRXDUO, WPRORX, WPRORXSPLIT6

WDMX TRANSMITTERS, RECEIVERS AND TRANSCEIVERS



	WPRORXIP	WPROTXIP	WPROTRX	WPROTRXDUO	WPRORX	WPRORXSPLIT6
Frequency:	2.4 GHz	2.4 GHz	2.4 GHz	2.4 GHz	2.4 GHz	2.4 GHz
Modulation method:	AFHSS	AFHSS	AFHSS	AFHSS	AFHSS	AFHSS
Compatibility:	CRMX, W-DMX G3, G4S	CRMX, W-DMX G3, G4S	CRMX, W-DMX G3, G4S	CRMX, W-DMX G3, G4S	CRMX, W-DMX G3, G4S	CRMX, W-DMX G3, G4S
Working range:	500m (line-of-sight)	500m (line-of-sight)	500m (line-of-sight)	500m (line-of-sight)	500m (line-of-sight)	500m (line-of-sight)
Antenna type:	5dBi	5dBi	5dBi	5dBi	5dBi	5dBi
CONTROL						
DMX channels:	512	512	512	1024	512	512
Universes per device:	1	1	1	2	1	1
Universe in coexistence:	16 Max.	16 Max.	16 Max.	16 Max.	16 Max.	16 Max.
DMX Latency:					< 5 ms	
Signal connector:	5Pin XLR female	5Pin XLR male	5Pin XLR female	5Pin & 3 pin XLR in / out	3Pin / 5Pin XLR female	5Pin XLR female in / thru; 6 x 5Pin XLR splitter
Power connector:	Powercon In	Powercon In	Powercon In	Powercon In	Powercon In	Powercon In
HOUSING						
IP rate:	IP65	IP65	IP20	IP20	IP20	IP20
Mounting:	Truss mounting bracket included	Truss mounting bracket	Truss mounting bracket	Rack or Truss mounting	Truss mounting bracket included	Truss mounting bracket
Dimensions:	135 x 90 x 265mm / 5.31" x 3.54" x 10.43"	135 x 90 x 265mm / 5.31" x 3.54" x 10.43"	145 x 100 x 57mm / 5.71" x 3.94" x 2.24"	482 x 147 x 44mm / 18.98" x 5.79" x 1.73"	137 x 122 x 97mm / 5.93" x 4.80" x 3.82"	137 x 122 x 97mm / 5.93" x 4.80" x 3.82"
Weight:	1.0 kg / 2 lbs	1.0 kg / 2 lbs	1.2 kg / 3 lbs	3.0 kg / 7 lbs	0.8 kg / 2 lb	0.8 kg / 2 lb



RAIN COVERS

RAINCOVERS, CARRY BAGS

Event Lighting rain covers are the ideal way to protect your fixtures from rain or leaks during outdoor events and gigs. Made from flame retardant cloth and PC transparent soft material, they are available in a variety of sizes to suit a range of fixtures including small pars and large moving heads. Carry bags also available for rain covers.







	RAINCL	RAINCL	RAINCMS	RAINCS	RAINCPARS
FITS:	Double mount fixtures (150 mm apart)	Double mount fixtures (150 mm apart)	Sngle mount fixtures	Sngle mount fixtures	External yoke mounted fixtures
HEIGHT:	350 mm / 13.6"	250 mm / 9.8"	200 mm / 7.9"	200 mm / 7.9"	200 mm / 7.9"
UPPER DIAMETER:	560 mm / 22.0"	500 mm / 19.7"	400 mm / 15.7"	300 mm / 11.8"	250 mm / 9.8"
LOWER DIAMETER:	700 mm / 27.6"	630 mm / 24.8"	500 mm / 19.7"	400 mm / 15.7"	325 mm / 12.8"
MATERIALS:	PC transparent soft material				Flame retardant oxford cloth



Rain Cover Carry Bags

	RAINCBAGL	RAINCBAGM	RAINCBAGS
TYPE:	Secure velcro seal	Secure velcro seal	Secure velcro seal
SIZE:	90 x 110 cm / 35.4" x 43.3"	85 x 95 cm / 33.5" x 37.4"	55 x 67 cm / 21.7" x 26.4"
FITS:	10 x RAINCL	10 x RAINCM	10 x RAINCS, RAINCPARS or RAINCMS





ROAD CASES

A CASE FOR ANYTHING. A CASE FOR EVERYTHING.

ROAD CASE	FOR	FITS
HAVOCB120CASE4AF	HAVOCB120, HAVOCS150	4
HAVOCH200CASE2AF	HAVOCH200	2
HAVOCH330CASE2AF	HAVOCH330	2
HAVOCH600FCASE2AF	HAVOCH600, HAVOCH925	2
HAVOCW19X40C2AF	HAVOCW19X40WCRI	2
HAVOCW7X40C4AF	HAVOCW7X40CRI	4
OUTBACK12X40WC4AF	OUTBACK12X60W	4
OUTBACK180BC2AF	OUTBACK180B	2
OUBACK350CASE2AF	OUTBACK350H	2
DELUGEM800HFCASEAF	DELUGEM800HF	2
DELM7X60CASE4AF	DELUGE7X60WFX	4
DELM19X60CASE2AF	DELUGEM19X60WFX	2
DELM120CASE4AF	DELUGEM120WFX	4
DEL24CASE4AF	DELUGE24X12H	4
DEL24CASE4CAF	Charging case DELUGE24X12H	4
PAR12BDCASEWCAF	PAR12 with barn doors	8
PAR9X12OBCAF	Charging case PAR9x12BH-IP	6
PAR9CASEWCAF	PAR9X15O/PAR9X12H-IP	6
PIXBAR12H8AF	PIXBAR12H/Q/VW	8
PAR12X20HIPCASEAF	PAR12X20H-IP with barn doors	6
PANX44CASEAF	PANX44	4
PANXCASEAF	PANX21, PANX22, PANX41	12
TSUNAMI-IPC4AF	TSUNAMI2-IP	4
F96VWCASE8AF	F96VW	8
FRESC6AAF	F200VW, F160QW	6
OPERACCASE4AF	OPERAC100VWF/FCF/200VWF/FCF	4
EQC-PACK6X6X6AF	Packer case 580x580x580mm	
EQC-PACK6X6X8AF	Packer case 580x580x780mm	
EQC-PACK6X6X12AF	Packer case 580x580x1180mm	
PACKDIV6X6AF	Divider for Packer cases	

* We can also design, manufacture and provide custom cases to suit any fixture or product.

Event Lighting's case factory provides specially designed cases for all of our lighting fixtures plus for any fixture, any product of any brand. If you want a case for it, it can be done. Our factory features state of the art manufacturing equipment and rigorous quality control to ensure Event Lighting cases are of the utmost quality and ready to take on transport, touring or storage requirement thrown at it.

Our cases feature:

- Attractive black trim
- Pad-lockable latches
- Recessed spring return handles and latches
- Heavy duty ply construction
- Heavy duty casters with brake diagonally opposite each other
- Casters mounted to extra support ply for added strength
- Black textured laminate finish, easy to clean
- Trucking friendly standard external dimensions
- High density foam
- Stackable
- OEM available. Your logo, your business, your brand








	PAR12CASEWCAF	SURF12X60CAF	TSUNAMI2-IPC4AF
	HEAVY DUTY 5 PLY CONSTRUCTION	HEAVY DUTY 5 PLY	HEAVY DUTY 5 PLY
Dimensions	795 x 595 x 655mm / 31.3 x 23.4 x 25.7"	1180 x 780 x 500mm / 46.4 x 30.7 x 19.6"	995 x 595 x 525mm / 39.1 x 23.4 x 20.6"
wWeight	30 kg / 66 lbs	20.0 kg / 44 lbs	34.6 kg / 76 lbs
Fits	8 units	3 units	8 units

INTRODUCING

AV REALM

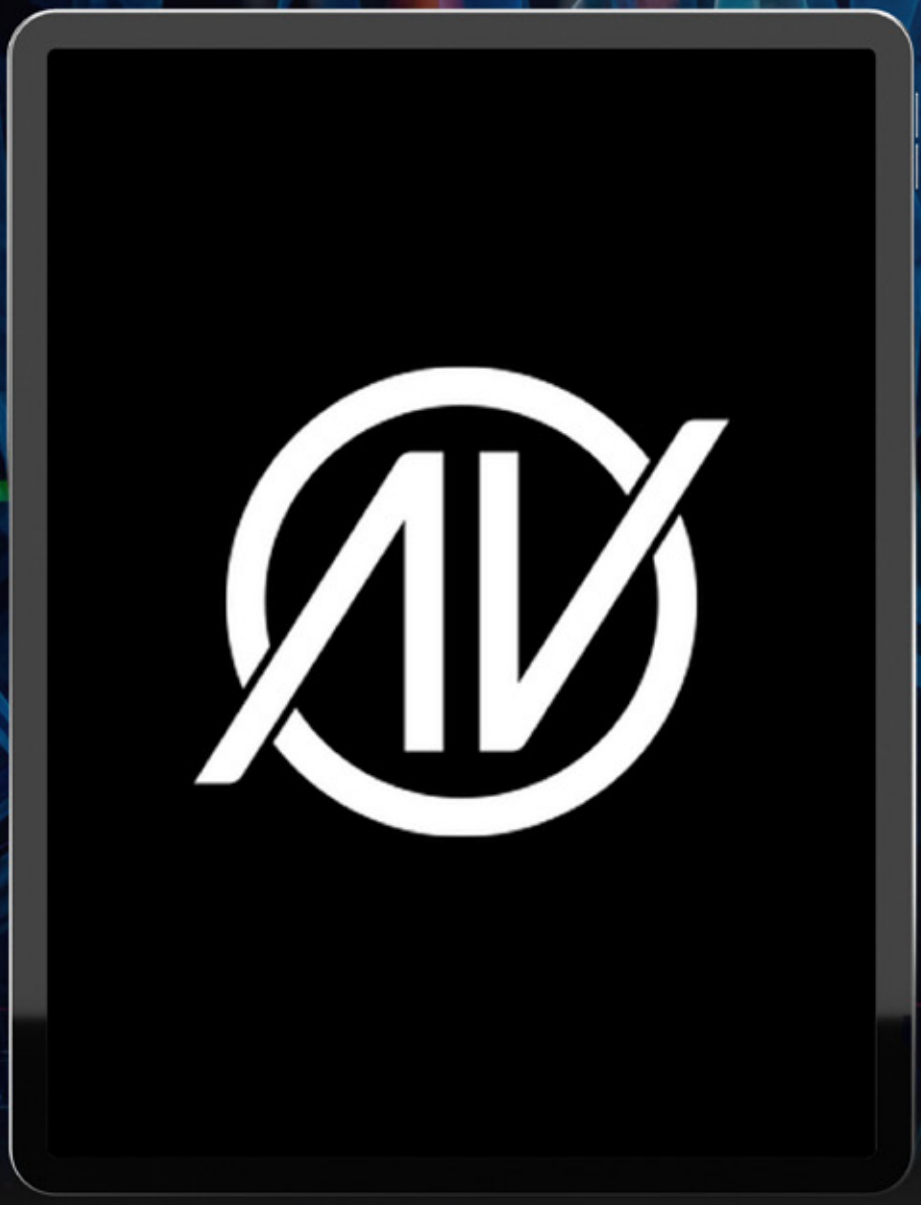

Control for any Ethernet-Controllable Devices
including LED screen, Home Entertainment and Automation

Features

Easy To Use

- Add a Button
- Set the Command
- Control Your Device
- Device Presets to make Setup Easy

Make it Your Own

- Customisable Button Images
- Upload A Unique Background
- Set Any Command to any Button





- **Universal Compatibility**

  Works with any TCP/UDP enabled device, giving you control over any device on your network.

- **Customisable Buttons**

  Create buttons and map them to any function of your device and/or navigate to other pages within the app!

- **Personalised Appearance**

  Import personalised Images to create your own unique look and feel. Represent your brand, business or use a meaningful photo.

LIGHT PURSUIT

MOVING HEADS REAL TIME CONTROLLING WITH MOUSE - SOFTWARE

Light PURSUIT

Moving Heads controlled with the touch of a mouse!




Control intelligent lighting effortlessly from your PC in real time.

Set the stage, and have any or all lights trace your cursor with ease!

Maintain total control with Manual Override, taking control back to your controller at the press of a button.

Easy Setup and Operation

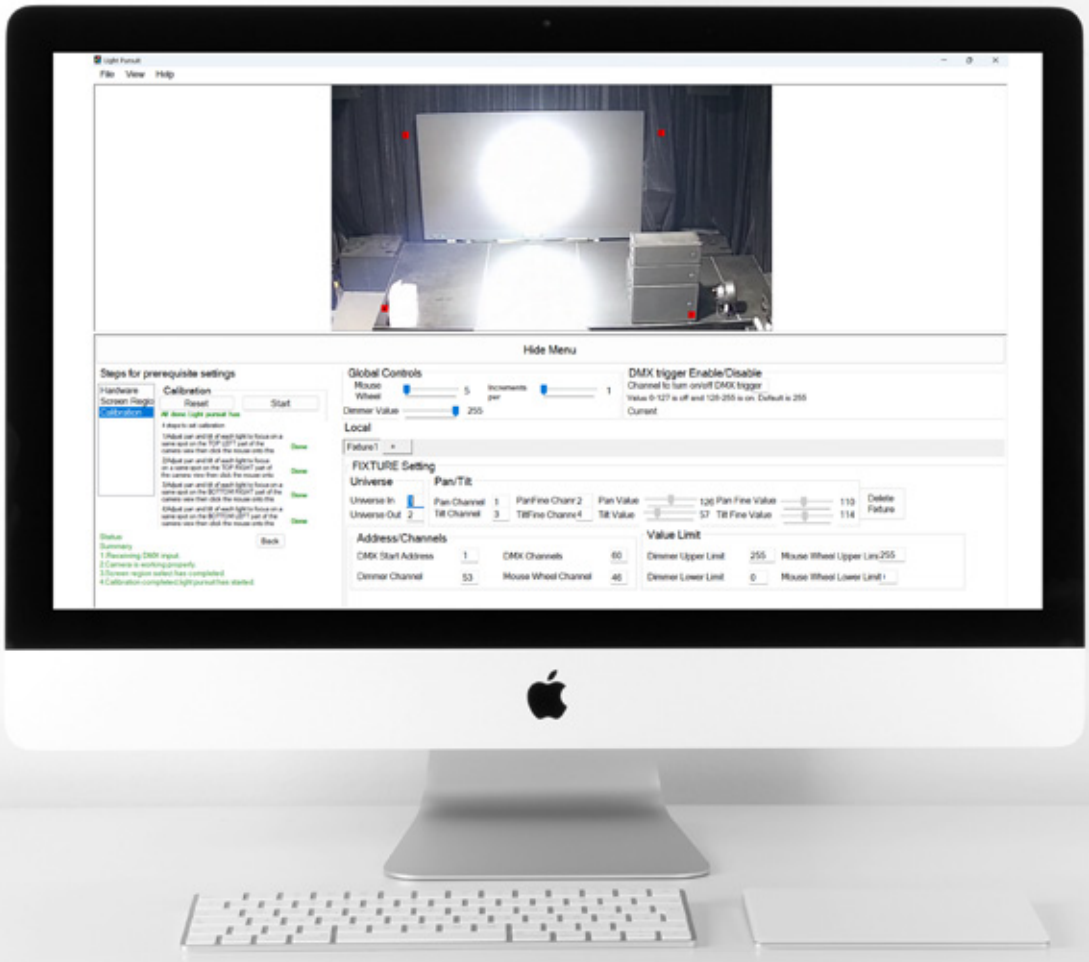

1 **After connecting your computer, camera and lights, set the stage!**

2 **Select each corner of your stage, setting the screen region and synchronising your cursor with your lighting fixture.**

3 **Modify any parameter of your Moving Heads! Tilt, Pan, Zoom, even change colours, all with your mouse or trackpad.**

Control your Follow-Spot all from the comfortability of your device.

With Manual Override, easily set a DMX trigger on your control board to toggle Light Pursuit on the fly.

Controlling Moving Heads has never been simpler!




EVENT LIGHTING

2026

CATALOGUE


EVENT
LIGHTING
eventlighting.com.au

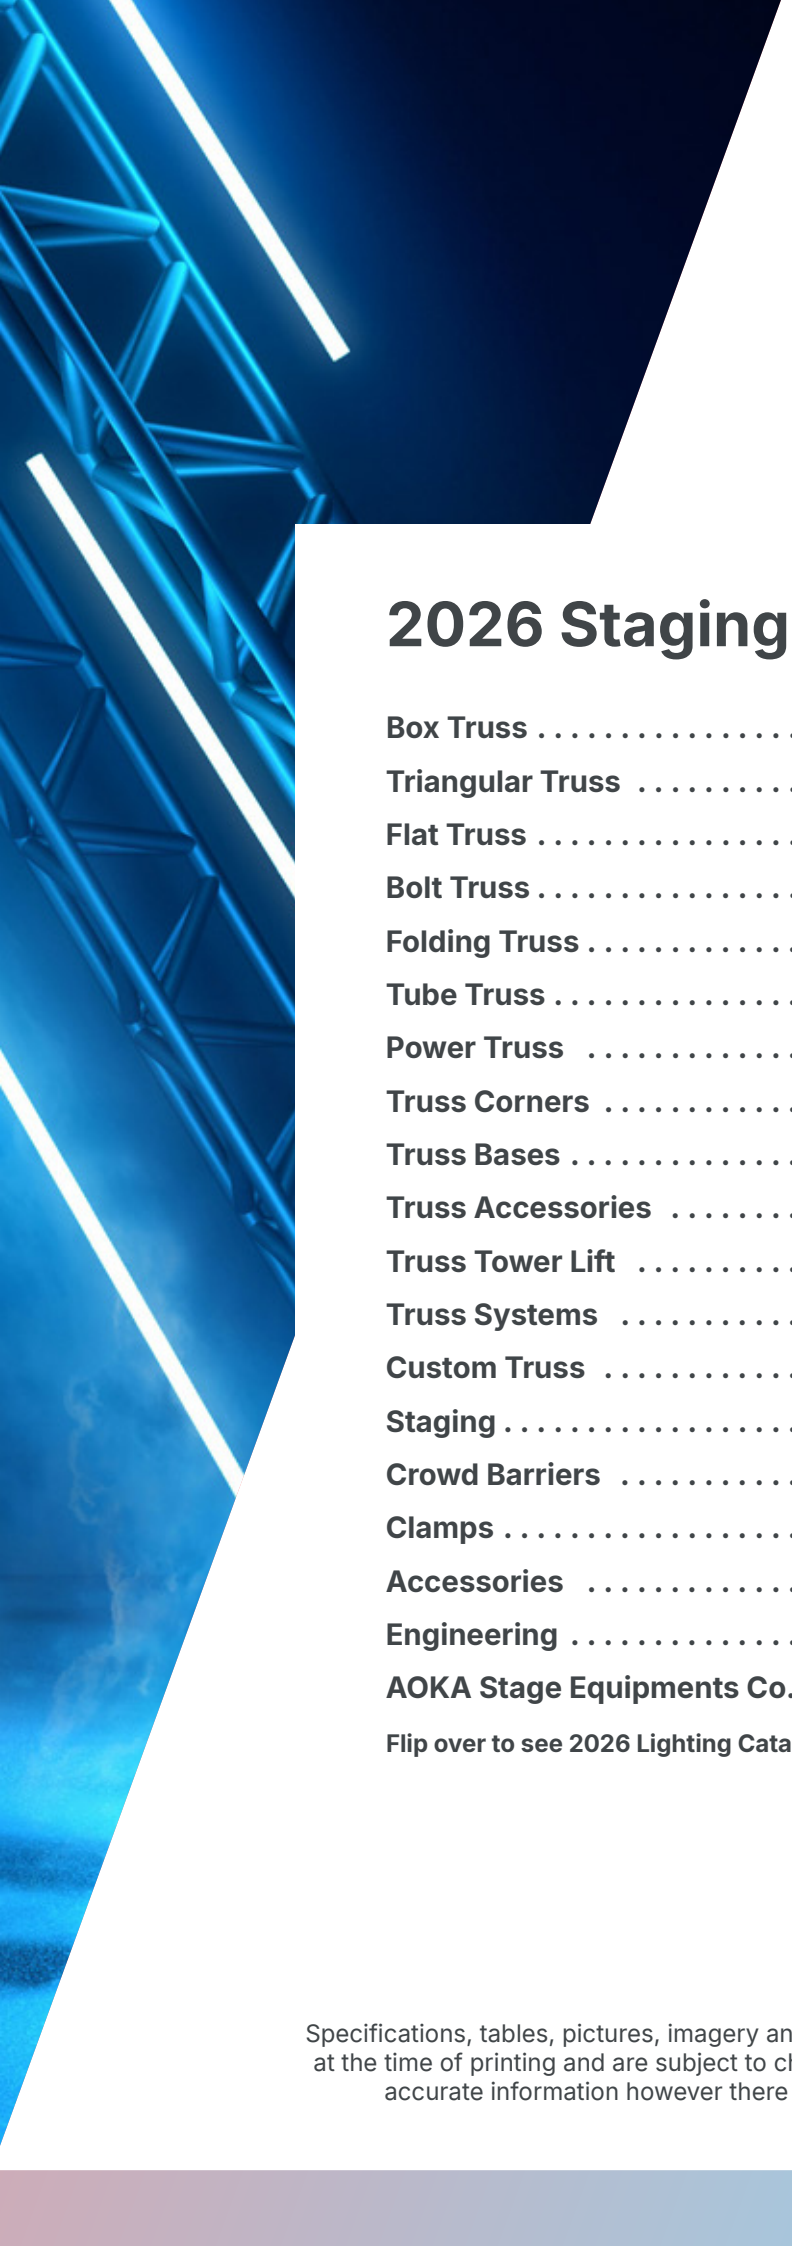

Event Lighting International
sales@eventlighting.com.au
+61 450 745 600
www.eventlighting.com.au


2026 Staging and Truss Catalogue

Box Truss 4
Triangular Truss 8
Flat Truss 11
Bolt Truss 12
Folding Truss 16
Tube Truss 18
Power Truss 19
Truss Corners 20
Truss Bases 24
Truss Accessories 25
Truss Tower Lift 26
Truss Systems 27
Custom Truss 28
Staging 30
Crowd Barriers 34
Clamps 36
Accessories 40
Engineering 42
AOKA Stage Equipments Co., Ltd 43

Flip over to see 2026 Lighting Catalogue


Specifications, tables, pictures, imagery and details of products shown in this catalogue are correct at the time of printing and are subject to change without notice. All care has been taken to provide accurate information however there is no liability for any errors that may occur. E&OE.

T3BL* 290MM / 11.4" SPIGOT BOX TRUSS LADDER STYLE, 2MM / 0.08" WALL THICKNESS

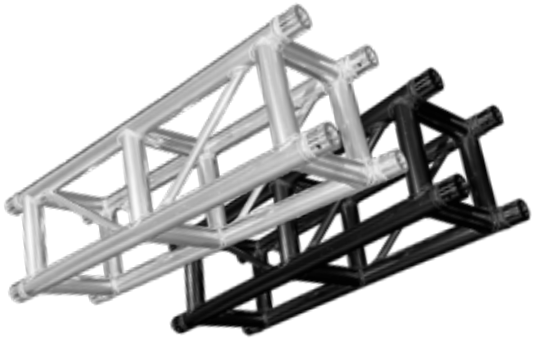

SPECIFICATIONS

	T3BL*
Main Tube:	50mm x 2mm / 2" x 0.08"
Vice Brace:	50mm x 2mm / 2" x 0.08"
Diagonal Brace:	20mm x 2mm / 0.8" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.29 / 0.42 / 0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4
Length: feet	0.95 / 1.4 / 1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1




Load Chart T3BL* Series (2mm Main Tube). Truss diagonals must be vertical.

SPAN (M)	UNIFORM LOAD (KG/M)	CENTRE POINT LOAD (KG)	1/3 POINTS LOAD (KG)	1/4 POINTS LOAD (KG)
2	950	1300	1000	700
3	750	1200	900	650
4	550	1000	750	560
5	400	800	630	440
6	250	700	570	385
7	200	600	500	330
8	150	500	400	280
9	120	400	370	245
10	95	350	320	220
11	80	320	270	190
12	70	300	250	175

T3BL*H 290MM / 11.4" SPIGOT BOX TRUSS LADDER STYLE, 3MM / 0.1" WALL THICKNESS



	T3BL*H
Main Tube:	50mm x 3mm / 2" x 0.1"
Vice Brace:	50mm x 2mm / 2" x 0.08"
Diagonal Brace:	20mm x 2mm / 0.8" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.29 / 0.42 / 0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4 m
Length: feet	0.95 / 1.4 / 1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1



Load Chart T3BL*H Series (3mm / 0.1" Main Tube). Truss diagonals must be vertical.


SPAN (M)	2M	3M	4M	5M	6M	7M	8M	9M	10M	11M	12M
Centre Point Load (kg)	2269	1682	1267	1041	715	550	525	455	408	384	360
Deflection (mm)	2	6	10	13	20	30	35	45	65	87	110
Uniform Load (kg)	1900	1679	1410	1236	1165	1000	825	750	700	650	600
Deflection (mm)	2	7	12	20	28	35	40	86	106	120	133

T4BL* 400MM / 15.7" SPIGOT BOX TRUSS LADDER STYLE, 3MM / 0.1" WALL THICKNESS



SPECIFICATIONS

	T4BL*
Main Tube:	50mm x 3mm / 2" x 0.1"
Vice Brace:	50mm x 2mm /2" x 0.08"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.2 / 0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4
Length: feet	0.95 / 1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1



Load Chart T4BL* Series (3mm / 0.1" Main Tube). Truss diagonals must be vertical.


SPAN (M)	1M	2M	3M	4M	5M	6M	7M	8M	9M	10M	11M	12M	13M	14M	15M	16M
Centre Point Load (kg)	2011	1950	1859	1770	1589	1297	1100	980	910	835	755	697	600	520	479	443
Deflection (mm)	2	4	8	11	16	25	38	45	60	73	85	103	125	143	167	187
Uniform Load (kg)	2779	2712	2689	2605	2475	2300	1850	1650	1435	1257	1129	935	885	825	787	698
Deflection (mm)	2.5	4	5.8	10	14	20	27	36	49	60	70	87	101	115	132	147

T2BL* 220MM SPIGOT BOX TRUSS, 2MM WALL THICKNESS



SPECIFICATIONS

	T2BL*
Main Tube:	30mm x 2mm / 1.2" x 0.08"
Vice Brace:	16mm x 2mm / 0.6" x 0.08"
Diagonal Brace:	16mm x 2mm / 0.6" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.28 / 0.5 / 1 / 1.5 / 2 / 2.5 / 3
Length: feet	0.92 / 1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8



Load Chart T2BL* Series (2mm / 0.08" Main Tube)


SPAN (M)	1M	2M	3M	4M	5M	6M	7M	8M	9M	10M
Centre Point Load (kg)	382	378	345	260	205	169	142	123	105	95
Deflection (mm)	1	3	7	12	20	30	45	55	70	85
Uniform Load (kg)	382	378	377	376	339	280	235	205	177	155
Deflection (mm)	1	3	5	10	15	27	35	47	55	70

T3B5L* 290MM / 11.4" SPIGOT 5-CHORD BOX TRUSS, 3MM / 0.1" WALL THICKNESS



SPECIFICATIONS


	T3B5L*
Main Tube:	50mm x 3mm / 2" x 0.1"
Vice Brace:	50mm x 2mm / 2" x 0.08"
Diagonal Brace:	20mm x 2mm / 0.8" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1



Load Chart T3B5L* Series (3 mm / 0.1" Main Tube). Fifth chord must face down.


SPAN (M)	UNIFORM LOAD (KG/M)	CENTRE POINT LOAD (KG)	1/3 POINTS LOAD (KG)	1/4 POINTS LOAD (KG)
2	1000	1300	1000	800
3	800	1200	950	750
4	550	1000	850	700
5	450	800	800	650
6	350	750	750	600
7	300	700	700	550
8	250	650	650	500
9	200	600	580	420
10	160	550	480	350
11	100	500	380	250
12	70	420	280	210

T4B5L* 400MM / 15.7" SPIGOT 5-CHORD BOX TRUSS, 3MM / 0.1" WALL THICKNESS

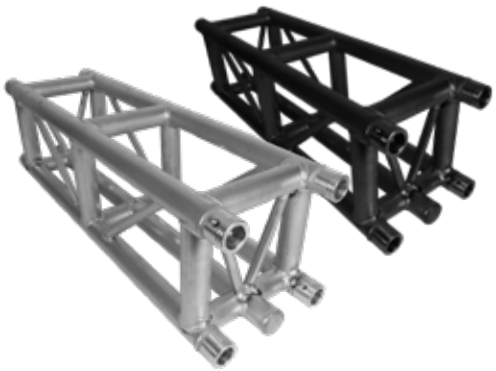

SPECIFICATIONS

	T4B5L*
Main Tube:	50mm x 3mm / 2" x 0.1"
Vice Brace:	50mm x 2mm /2" x 0.08"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1



Load Chart T4B5L* Series (3mm / 0.1" Main Tube). Fifth chord must face down.


SPAN (M)	1M	2M	3M	4M	5M	6M	7M	8M	9M	10M	11M	12M	13M	14M	15M	16M
Centre Point Load (kg)	2011	1950	1859	1770	1589	1297	1100	980	910	835	755	697	600	520	479	443
Deflection (mm)	2	4	8	11	16	25	38	45	60	73	85	103	125	143	167	187
Uniform Load (kg)	2779	2712	2689	2605	2475	2300	1850	1650	1435	1257	1129	935	885	825	787	698
Deflection (mm)	2.5	4	5.8	10	14	20	27	36	49	60	70	87	101	115	132	147

T3BD* 290MM / 11.4" SPIGOT BOX TRUSS DIAGONAL STYLE, 3MM / 0.1"WALL THICKNESS



SPECIFICATIONS

	T3BD*
Main Tube:	50mm x 3mm / 2" x 0.1"
Diagonal Brace:	20mm x 2mm / 0.8" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8



Load Chart T3BD* Series (3mm / 0.1" Main Tube)


SPAN (M)	2M	3M	4M	5M	6M	7M	8M	9M	10M	11M	12M
Centre Point Load (kg)	2069	1512	1147	941	645	495	475	410	368	346	320
Deflection (mm)	2	6	10	13	20	30	35	45	65	89	112
Uniform Load (kg)	1700	1512	1270	1113	1049	900	735	675	630	585	540
Deflection (mm)	2	7	12	20	28	35	40	86	106	122	135

T4BD* 400MM / 15.7" SPIGOT BOX TRUSS DIAGONAL STYLE, 3MM / 0.1" WALL THICKNESS



SPECIFICATIONS

	T4BD*
Main Tube:	50mm x 3mm / 2" x 0.1"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8



Load Chart T4BD* Series (3mm / 0.1" Main Tube)


SPAN (M)	1M	2M	3M	4M	5M	6M	7M	8M	9M	10M	11M	12M	13M	14M	15M	16M
Centre Point Load (kg)	2011	1950	1859	1770	1589	1297	1100	980	910	835	755	697	600	520	479	443
Deflection (mm)	2	4	8	11	16	25	38	45	60	73	85	103	125	143	167	187
Uniform Load (kg)	2779	2712	2689	2605	2475	2300	1850	1650	1435	1257	1129	935	885	825	787	698
Deflection (mm)	2.5	4	5.8	10	14	20	27	36	49	60	70	87	101	115	132	147

T46BL* 400 X 600MM / 15.7 X 23.6" SPIGOT RECTANGULAR TRUSS, 3MM / 0.1" WALL THICKNESS



SPECIFICATIONS

	T46BL*
Main Tube:	50mm x 3mm / 2" x 0.1"
Vice Brace:	50mm x 2mm /2" x 0.08"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1

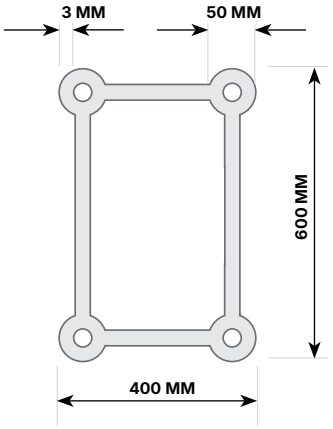

Load Chart T46BL* Series (3mm / 0.1" Main Tube). Truss diagonals must be vertical.


SPAN (M)	4M	5M	6M	7M	8M	9M	10M	11M	12M	13M	14M	15M	16M	17M	18M	19M	20M
Centre Point Load (kg)	2900	2300	2000	1712	1613	1394	1135	1049	900	889	820	750	660	570	560	550	480
Deflection (mm)	12	14	15	18	26	31	40	43	46	49	53	56	72	88	110	132	138
Uniform Load (kg)	2900	2300	2200	1900	1800	1550	1450	1400	1350	1200	1163	1125	1007	890	883	875	650
Deflection (mm)	12	13	18	20	24	32	40	44	48	61	74	87	90	95	112	129	136

T56BL* 500 X 600MM / 19.7 X 23.6" SPIGOT RECTANGULAR TRUSS, 3MM / 0.1" WALL THICKNESS



SPECIFICATIONS

	T56BL*
Main Tube:	50mm x 3mm / 2" x 0.1"
Vice Brace:	50mm x 2mm /2" x 0.08"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1

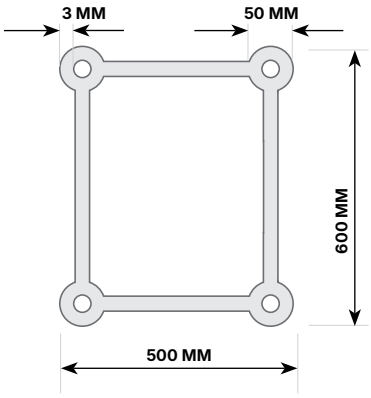

Load Chart T56BL* Series (3mm / 0.1" Main Tube). Truss diagonals must be vertical.


SPAN (M)	2M	3M	4M	5M	6M	7M	8M	9M	10M	11M	12M	13M	14M	15M	16M	17M	18M	19M	20M	21M
Centre Point Load (kg)	3210	3145	3095	2495	2210	1809	1643	1424	1255	1049	900	889	820	750	660	570	560	550	480	470
Deflection (mm)	13	14	17	20	25	30	34	37	40	43	46	49	53	56	72	88	10	132	138	142
Uniform Load (kg)	3210	3140	3100	2300	2210	1910	1821	1570	1445	1400	1350	1200	1163	1125	1007	890	883	857	650	639
Deflection (mm)	13	15	18	20	24	32	35	38	41	44	48	61	74	87	90	95	112	129	136	144

T57BL* 520 X 760MM / 20.5 X 29.9" SPIGOT RECTANGULAR TRUSS, 3MM / 0.1" WALL THICKNESS



SPECIFICATIONS

	T57BL*
Main Tube:	50mm x 3mm / 2" x 0.1"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1

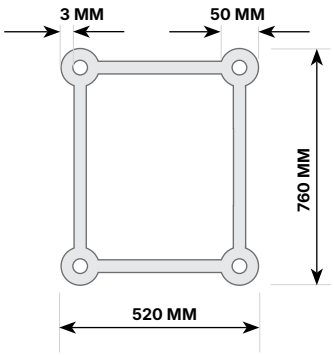

Load Chart T57BL* Series (3mm / 0.1" Main Tube). Truss diagonals must be vertical.


SPAN (M)	4M	5M	6M	7M	8M	9M	10M	11M	12M	13M	14M	15M	16M	17M	18M	19M	20M	21M	22M	23M	24M	25M	26M	27M
Centre Point Load (kg)	4000	3880	3468	2691	2396	2307	2134	1738	1356	1280	1108	1086	991	924	832	711	659	486	438	400	379	336	318	296
Deflection (mm)	12	13	16	18	25	32	40	48	54	62	70	84	96	103	112	122	130	141	153	165	176	194	202	220
Uniform Load (kg)	4000	3880	3700	3629	2827	2760	2463	2261	2036	1800	1650	1600	1550	1400	1200	1174	1050	980	950	900	800	750	700	680
Deflection (mm)	12	13	16	19	24	30	36	45	54	60	68	84	92	102	113	120	126	134	138	140	148	156	162	167

T610BL* 600 X1000MM / 23.6 X 39.4" SPIGOT RECTANGULAR TRUSS, 5MM /0.2" WALL THICKNESS



SPECIFICATIONS


	T610BL*
Main Tube:	60mm x 5mm / 2.4" x 0.2"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1

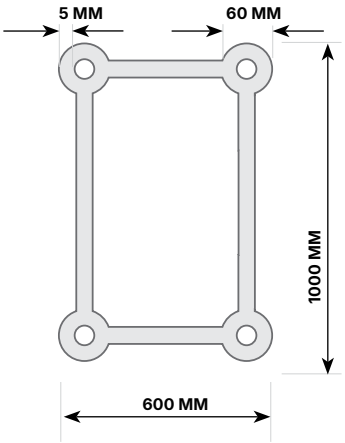

Load Chart T610BL* Series (5mm / 0.2" Main Tube). Truss diagonals must be vertical.


SPAN (M)	4M	6M	8M	10M	12M	14M	16M	18M	20M	22M	24M	26M	28M	30M	32M	34M	36M
Centre Point Load (kg)	9662	7230	5392	4282	3534	2996	2587	2266	2006	1788	1604	1448	1309	1186	1078	1005	910
Deflection (mm)	5	12	20	26	40	50	68	82	101	125	145	169	195	221	253	266	300
Uniform Load (kg)	11192	10974	8951	7106	5868	4973	4298	3764	3330	2970	2665	2403	2174	1971	1791	1736	1558
Deflection (mm)	5	8	16	23	30	45	55	68	80	100	115	138	156	177	200	215	241

T3TD* 290MM / 11.4" SPIGOT TRIANGULAR TRUSS, 3MM /0.1" WALL THICKNESS

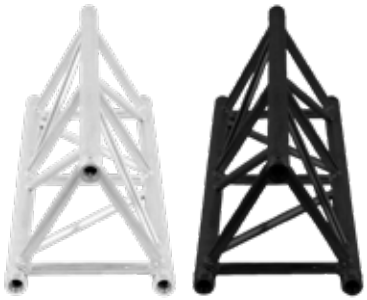

SPECIFICATIONS


	T3TD*
Main Tube:	50mm x 3mm / 2" x 0.1"
Vice Brace:	50mm x 2mm / 2" x 0.08"
Diagonal Brace:	20mm x 2mm / 0.8" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8



Load Chart T3TD* Series (3mm / 0.1" Main Tube)


SPAN (M)	2M	3M	4M	5M	6M	7M	8M	9M	10M	11M	12M
Centre Point Load (kg)	1000	730	501	446	367	305	216	158	140	124	110
Deflection (mm)	2.5	8	13	18	24	30	38	46	55	62	72
Uniform Load (kg)	1108	1000	820	783	600	450	421	400	342	315	298
Deflection (mm)	2	7	12	20	25	33	46	51	58	66	73

T4TD* 400MM / 15.7" SPIGOT TRIANGULAR TRUSS, 3MM / 0.1" WALL THICKNESS

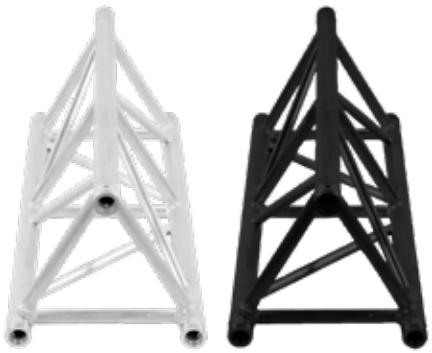

SPECIFICATIONS


	T4TD*
Main Tube:	50mm x 3mm / 2" x 0.1"
Vice Brace:	50mm x 2mm /2" x 0.08"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8



Load Chart T4TD* Series (3mm / 0.1" Main Tube)


SPAN (M)	1M	2M	3M	4M	5M	6M	7M	8M	9M	10M	11M	12M	13M	14M	15M	16M
Centre Point Load (kg)	1700	1350	1208	1106	1079	1000	901	885	801	789	798	740	709	483	632	620
Deflection (mm)	2.2	3.8	4.7	6.9	9.8	10	16	20	22	30	40	45	50	60	67	79
Uniform Load (kg)	3326	2645	2566	2196	2000	1956	1736	1645	1501	1456	1342	1304	1202	1176	1123	1096
Deflection (mm)	1.8	2.4	4	6	7.9	10	14	17	21	26	35	38	49	51	60	69

T3F* 290MM / 11.4" SPIGOT FLAT TRUSS

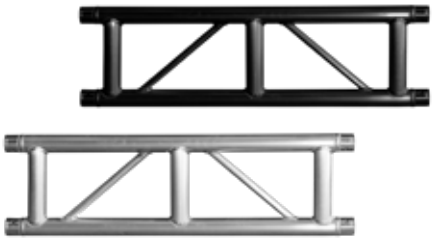

SPECIFICATIONS


	T3F*
Main Tube:	50mm x 2mm / 2" x 0.08"
Diagonal Brace:	20mm x 2mm / 0.8" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.42 / 0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4
Length: feet	1.4 / 1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1



Load Chart T3F* Series (2mm / 0.08" Main Tube). Truss orientation must be vertical.


SPAN (M)	UNIFORM LOAD (KG/M)	CENTRE POINT LOAD (KG)
2	380	400
3	100	150
4	30	50
5	20	30
6	10	20

T4F* 400MM / 15.7" SPIGOT FLAT TRUSS

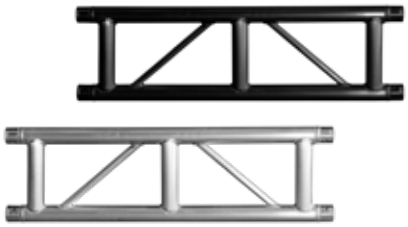

SPECIFICATIONS


	T4F*
Main Tube:	50mm x 3mm / 2" x 0.1"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1

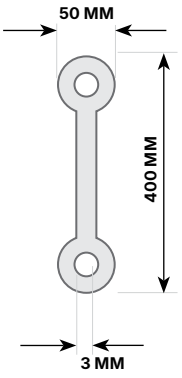

Load Chart T4F* Series (3mm 0.1" Main Tube). Truss orientation must be vertical.


SPAN	1M	2M	3M	4M	5M	6M
Centre Point Load (kg)	1276	544	275	140	78	53
Deflection (mm)	0	1	2	2	2	3
Uniform Load (kg)	1277	900	458	230	131	82
Deflection (mm)	0	1	1	1	2	2

T3BB* 300MM / 11.8" BOLT BOX TRUSS

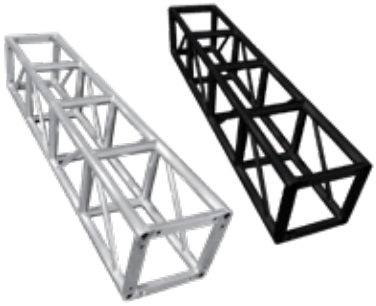

SPECIFICATIONS


	T3BB*
Main Tube:	50mm x 3mm / 2" x 0.1"
Vice Brace:	50mm x 2mm /2" x 0.08"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1



Load Chart T3BB* Series (3mm / 0.1" Main Tube). Truss diagonals must be vertical.


SPAN (M)	2M	3M	4M	5M	6M	7M	8M	9M	10M	11M	12M
Centre Point Load (kg)	1701	1276	900	823	627	550	480	400	300	280	250
Deflection (mm)	2	6	10	13	20	30	40	45	55	68	74
Uniform Load (kg)	1900	1679	1410	1236	900	750	600	550	500	480	450
Deflection (mm)	2	7	12	20	25	33	46	51	58	66	73

T4BB* 400MM / 15.7" BOLT BOX TRUSS

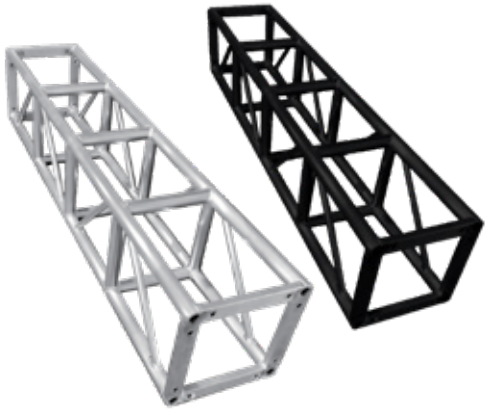

SPECIFICATIONS

	T4BB*
Main Tube:	50mm x 3mm / 2" x 0.1"
Vice Brace:	50mm x 2mm /2" x 0.08"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1



Load Chart T4BB* Series (3mm / 0.1" Main Tube). Truss diagonals must be vertical.


SPAN (M)	1M	2M	3M	4M	5M	6M	7M	8M	9M	10M	11M	12M	13M	14M	15M	16M
Centre Point Load (kg)	1600	1480	1400	1300	1250	1150	1050	1000	950	900	820	750	650	550	500	450
Deflection (mm)	3	5	7	15	21	30	41	52	63	75	84	93	99	106	123	140
Uniform Load (kg)	1700	1600	1550	1480	1400	1320	1250	1150	1100	1050	1010	960	930	900	825	750
Deflection (mm)	3	4	5	9	14	18	22	30	39	44	63	82	101	122	143	164

T3TB* 300MM / 11.8" BOLT TRIANGULAR TRUSS



SPECIFICATIONS

	T3TB*
Main Tube:	50mm x 3mm / 2" x 0.1"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8



Load Chart T3TB* Series (3mm / 0.1" Main Tube)


SPAN (M)	2M	3M	4M	5M	6M	7M	8M	9M	10M	11M	12M
Centre Point Load (kg)	1000	730	501	446	367	305	216	158	140	124	110
Deflection (mm)	2.5	8	13	18	24	30	38	46	55	62	72
Uniform Load (kg)	1108	1000	820	783	600	450	421	400	342	315	298
Deflection (mm)	2	7	12	20	25	33	46	51	58	66	73

T4TB* 400MM / 15. 7" BOLT TRIANGULAR TRUSS



SPECIFICATIONS

	T4TB*
Main Tube:	50mm x 3mm / 2" x 0.1"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8



Load Chart T4TB* Series (3mm / 0.1" Main Tube)


SPAN (M)	1M	2M	3M	4M	5M	6M	7M	8M	9M	10M	11M	12M	13M	14M	15M	16M
Centre Point Load (kg)	1700	1350	1208	1106	1079	1000	901	885	801	789	798	740	709	483	632	620
Deflection (mm)	2.2	3.8	4.7	6.9	9.5	10	16	20	22	30	40	45	50	60	67	79
Uniform Load (kg)	3326	2645	2566	2196	2000	1956	1736	1645	1501	1456	1342	1304	1202	1176	1123	1096
Deflection (mm)	1.8	2.4	4	6	7.9	10	14	17	21	26	35	38	49	51	60	69

T3FB* 300MM / 11.8" BOLT FLAT TRUSS



SPECIFICATIONS

	T3FB*
Main Tube:	50mm x 3mm / 2" x 0.1"
Vice Brace:	50mm x 2mm /2" x 0.08"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1



Load Chart T3FB* Series (3mm / 0.1" Main Tube). Truss orientation must be vertical.


SPAN (M)	UNIFORM LOAD (KG/M)	CENTRE POINT LOAD (KG)
2	380	400
3	100	150
4	30	50
5	20	30
6	10	20

T4FB* 400MM / 15.7" BOLT FLAT TRUSSS



SPECIFICATIONS


	T4FB*
Main Tube:	50mm x 3mm / 2" x 0.1"
Vice Brace:	50mm x 2mm /2" x 0.08"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1



Load Chart T4FB* Series (3mm / 0.1" Main Tube). Truss orientation must be vertical.


SPAN (M)	1M	2M	3M	4M	5M	6M
Centre Point Load (kg)	1276	544	275	140	78	53
Deflection (mm)	0	1	2	2	2	3
Uniform Load (kg)	1277	900	458	230	131	82
Deflection (mm)	0	1	1	1	2	2

T46BB* 400 X 600MM / 15.7 X 23.6" BOLT RECTANGULAR TRUSS, 3MM / 0.1" WALL THICKNESS

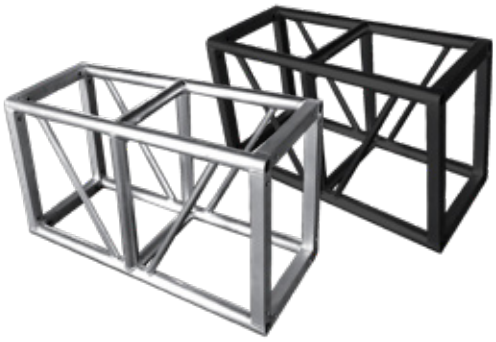

SPECIFICATIONS

	T46BB*
Main Tube:	50mm x 3mm / 2" x 0.1"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8

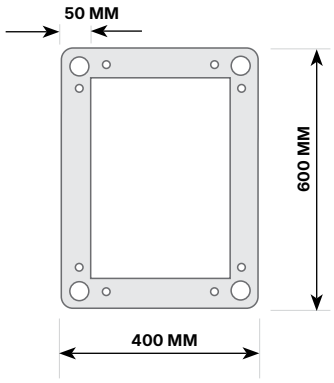

Load Chart T46BB* Series (3mm / 0.1" Main Tube). Truss diagonals must be vertical.


SPAN (M)	4M	5M	6M	7M	8M	9M	10M	11M	12M	13M	14M	15M	16M	17M	18M	19M	20M
Centre Point Load (kg)	2900	2300	2000	1712	1613	1394	1135	1049	910	910	876	886	700	612	549	543	480
Deflection (mm)	12	14	15	18	26	31	40	46	59	66	78	91	102	110	113	126	135
Uniform Load (kg)	2900	2300	2200	1900	1800	1550	1450	1350	1250	1150	1050	1000	950	900	800	700	650
Deflection (mm)	12	13	18	20	24	32	40	51	60	67	75	87	90	100	109	120	126

T610BB* 600 X 1000MM / 23.6 X 39.4" BOLT RECTANGULAR TRUSS, 3MM / 0.1" WALL THICKNESS



SPECIFICATIONS

	T610BB*
Main Tube:	60mm x 3mm / 2.4" x 0.1"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8

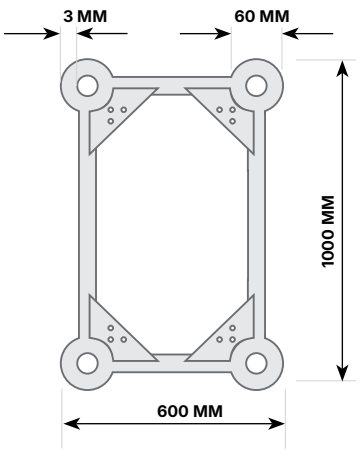

Load Chart T610BL* Series (3mm / 0.01" Main Tube). Truss diagonals must be vertical.


SPAN (M)	4M	6M	8M	10M	12M	14M	16M	18M	20M	22M	24M	26M	28M	30M	32M	34M
Centre Point Load (kg)	9662	7230	5392	4282	3534	2996	2587	2266	2006	1788	1604	1448	1309	1186	1078	980
Deflection (mm)	5	12	20	26	40	50	68	82	101	125	145	169	195	221	253	286
Uniform Load (kg)	11192	10974	8951	7106	5868	4973	4298	3764	3330	2970	2665	2403	2174	1971	1791	1626
Deflection (mm)	5	8	16	23	30	45	55	68	80	100	115	138	156	177	200	229

T55FF* 530 X 580MM / 20.7 X 22.8" SPIGOT FOLDING TRUSS



SPECIFICATIONS

	T55FF*
Main Tube:	50mm x 3mm / 2" x 0.1"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1



Load Chart T55FF* Series (3mm / 0.1" Main Tube)


SPAN (M)	3M	4M	5M	6M	7M	8M	9M	10M	11M	12M	13M	14M	15M	16M	17M	18M	19M	20M	21M	22M	23M	24M
Centre Point Load (kg)	2153	1749	1395	1273	1085	1030	985	879	855	832	811	745	731	675	663	617	575	567	558	520	490	454
Deflection (mm)	2	4	10	14	21	31	46	56	63	77	94	105	123	137	156	172	197	217	233	261	285	307
Uniform Load (kg)	2154	2147	2144	2112	1800	1711	1636	1461	1417	1381	1346	1235	1208	1120	1100	1021	955	940	924	866	811	758
Deflection (mm)	2	2	4	7	12	15	21	28	36	49	61	66	83	93	114	124	140	166	192	206	227	246

T610FF* 600 X 1000MM / 23.6 X 39.4" SPIGOT FOLDING TRUSS, 5MM / 0.2" WALL THICKNESS



SPECIFICATIONS

	T610FF*
Main Tube:	60mm x 5mm / 2.4" x 0.2"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 4
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8 / 13.1

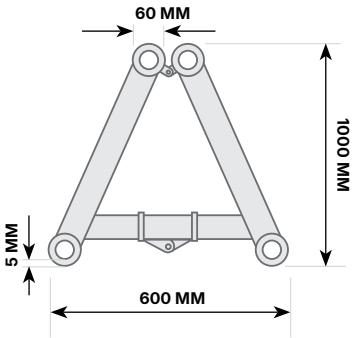

Load Chart T610FF* Series (3mm / 0.1" Main Tube)

SPAN (M)	3M	5M	7M	9M	12M	14M	17M	19M	21M	24M	26M	28M	31M	33M	36M
Centre Point Load (kg)	2070	2055	1855	1630	1460	1340	1218	1121	1041	968	908	843	807	759	718
Deflection (mm)	0.4	1	4	8	15	25	39	55	78	102	125	153	179	207	233
Uniform Load (kg)	2071	2063	1938	1634	1462	1404	1266	1120	1041	969	908	851	807	762	725
Deflection (mm)	0.5	1	7	10	19	26	41	52	75	94	118	143	171	201	237

CORNERS

FOLDING SPIGOT TRUSS CORNERS






	T55FFC2 / T55FFC2BK	T55FFC3 / T55FFC3BK	T55FFC4 / T55FFC4BK	T55FFC2V / T55FFC2VBK
Fits:	530 x 580mm / 20.7 x 22.8″ Spigot Folding Truss			
Type:	2-Way	3-Way	4-Way	2-Way (Vertical)
Main Tube:	50mm x 3mm / 2" x 0.1"			
Diagonal Brace:	25mm x 2mm / 1" x 0.08"			
Materials:	Aluminum alloy 6061-T6			
Finishing:	Washed or Black coated			
Rating:	TUV			


	T610FFC2 / T610FFC2BK	T610FFC3 / T610FFC3BK	T610FFC4 / T610FFC4BK	T610FFC2V / T610FFC2VBK
Fits:	600 x 1000mm / 23.6 x 39.4″ Spigot Folding Truss			
Type:	2-Way	3-Way	4-Way	2-Way (Vertical)
Main Tube:	60mm x 5mm / 2.4" x 0.2"			
Diagonal Brace:	25mm x 2mm / 1" x 0.08"			
Materials:	Aluminum alloy 6061-T6			
Finishing:	Washed or Black coated			
Rating:	TUV			

SPIGOTS, PINS, CLIPS, ACCESSORIES: PAGE 23

TRUSS TABLES & CHAIRS

TRUSS TABLES, CHAIRS, ROUNDED TOP



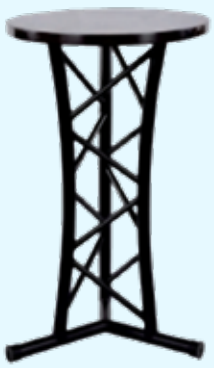


	TBTABLE1100BK	TBCHAIR780BK	TTTABLE1100BK	TTCHAIR780BK
Type	Box Truss Table	Box Truss Chair	Triangular Truss Table	Triangular Truss Chair
Height:	1100 mm / 43.3"	780 mm / 30.7"	1100 mm / 43.3"	780 mm / 30.7"
Top diameter:	800 mm / 31.5"	300 mm / 11.8"	800 mm / 31.5"	300 mm / 11.8"
Main tube:	50 mm / 2″			
Materials:	Aluminum alloy 6061-T6			
Finishing:	Black			

T05S* 50MM / 2" SINGLE TUBE, 2MM / 0.08" WALL THICKNESS



SPECIFICATIONS

	T05S*
Main Tube:	50mm x 2mm / 2" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV
Length: metres	0.5 / 1 / 1.5 / 2 / 2.5 / 3
Length: feet	1.6 / 3.3 / 4.9 / 6.6 / 8.2 / 9.8

Load Chart T05S* Series (2mm / 0.08" Main Tube)

SPAN (M)	UNIFORM LOAD (KG/M)	CENTRE POINT LOAD (KG)
1	220	400
2	120	120
3	40	30
4	25	12
5	15	7

CORNERS TRUSS CUBE - HALF SPIGOTS ON 3 SIDES



	T05SC	T05SCBK
Type:	3-Way	
Materials:	Aluminum alloy 6061-T6	
Finishing:	Washed	Black coated

CORNER BRACES TRUSS CORNER BRACE



	TBRACE1 / TBRACE1BK	TBRACE2 / TBRACE2BK
Width:	1m	2m
Materials:	Aluminum alloy 6061-T6	
Finishing:	Washed / Black coated	Washed / Black coated


"U" SECTIONS 600MM / 23.6" WIDE - 650MM / 25.6"TALL



	TU600	TU600BK
Type:	Truss U section	
Size:	600 x 650 mm / 23.6" x 25.6"	
Materials:	Aluminum alloy 6061-T6	
Finishing:	Washed	Black coated

T3BLSPD*

290MM / 11.4" SPIGOT POWER TRUSS, 3MM / 0.1" WALL THICKNESS

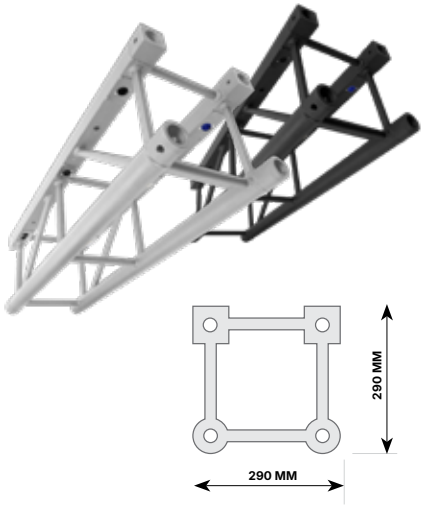

Event Lighting power box truss features a chord with TRUE1 power connections, and another with 5 pin XLR DMX signal connections, thereby reducing the need cabling along trussing, allowing for a more tidy appearance within a truss set up.

Power and signal input is connected to one end of the truss, with outputs spaced every 500mm for connecting fixtures. Multiple power trusses can be connected with short patch leads in between each.

The power truss also features insulated rigging holes and a fuse. Also available in a flat truss version, with just the power chord.

SPECIFICATIONS

	T3BLSPD*
Main Tube:	50mm x 3mm / 2" x 0.1"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Power interface:	TRUE1 in / out every half metre
XLR interface:	5-pin in/out every half metre
Protection:	Fuse
Compatibility:	290mm box truss
Mounting:	Insulated truss mounting holes
Rating:	TUV
Length: metres	1 / 2 / 3
Length: feet	3.3 / 6.6 / 9.8

Load Chart T3BLSPD* Series (3mm / 0.1" Main Tube)

SPAN (M)	2M	3M	4M	5M	6M	7M	8M	9M	10M	11M	12M
Centre Point Load (kg)	2269	1682	1267	1041	715	550	525	455	408	384	360
Deflection (mm)	2	6	10	13	20	30	35	45	65	87	110
Uniform Load (kg)	1900	1679	1410	1236	1165	1000	825	750	700	650	600
Deflection (mm)	2	7	12	20	28	35	40	86	106	120	133


T4BLSPD*

400MM / 15.7" SPIGOT POWER TRUSS, 3MM / 0.1" WALL THICKNESS



SPECIFICATIONS

	T4BLSPD*
Main Tube:	50mm x 3mm / 2" x 0.1"
Diagonal Brace:	25mm x 2mm / 1" x 0.08"
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Power interface:	TRUE1 in / out every half metre
XLR interface:	5-pin in/out every half metre
Protection:	Fuse
Compatibility:	400mm box truss
Mounting:	Insulated truss mounting holes
Rating:	TUV
Length: metres	1 / 2 / 3
Length: feet	3.3 / 6.6 / 9.8



Load Chart T4BLSPD* Series (3mm / 0.1" Main Tube)

SPAN (M)	1M	2M	3M	4M	5M	6M	7M	8M	9M	10M	11M	12M	13M	14M	15M	16M
Centre Point Load (kg)	2011	1950	1859	1770	1589	1297	1100	980	910	835	755	697	600	520	479	443
Deflection (mm)	2	4	8	11	16	25	38	45	60	73	85	103	125	143	167	187
Uniform Load (kg)	2779	2712	2689	2605	2475	2300	1850	1650	1435	1257	1129	935	885	825	787	698
Deflection (mm)	2.5	4	5.8	10	14	20	27	36	49	60	70	87	101	115	132	147

T3BC* 290MM / 11.4" SPIGOT BOX TRUSS CORNER



	T3BC / T3BCBK	T3BC2 / T3BC2BK	T3BC3 / T3BC3BK	T3BCT3 / T3BCT3BK	T3BCT4 / T3BCT4BK	T3BCX4 / T3BCX4BK	T3BC5 / T3BC5BK
Truss Size:	290mm / 11.4"						
Type:	Cube / universal	2 way 90 degree	3 way 90 degree	3 way - T corner	4 way - T with upright	4 way - Cross junction	4 way - cross junction with upright
Main Tube:	50mm x 3 mm / 2" x 0.1"						
Materials:	Aluminum alloy 6061-T6						
Finishing:	Washed or Black coated						

All truss corners and junctions, except for "cube" types are designed to be 500mm from truss connections.
For example T3BCT4 is 500 x 500 x 500 mm in size, while T3BCT3 is 500 x 500 x 290 mm

T4BC* 400MM / 15.7" SPIGOT BOX TRUSS CORNER



	T4BC / T4BCBK	T4BC2 / T4BC2BK	T4BC3 / T4BC3BK	T4BCT3 / T4BCT3BK	T4BCT4 / T4BCT4BK	T4BCX4 / T4BCX4BK	T4BC5 / T4BC5BK
Truss Size:	400mm / 15.7"						
Type:	Cube / universal	2 way 90 degree	3 way 90 degree	3 way - T corner	4 way - T with upright	4 way - Cross junction	4 way - cross junction with upright
Main Tube:	50mm x 3 mm / 2" x 0.1"						
Materials:	Aluminum alloy 6061-T6						
Finishing:	Washed or Black coated						

All pictures of corners are representative and not necessary the exact look of the final product. These picture will help understand the shapes and purposes of these corners and junctions.

T2BC* 220MM / 8.7" SPIGOT BOX TRUSS CORNER



	T2BC / T2BCBK	T2BC2 / T2BC2BK	T2BC3 / T2BC3BK	T2BCT3 / T2BCT3BK	T2BCT4 / T2BCT4BK	T2BCX4 / T2BCX4BK	T2BC5 / T2BC5BK
Truss Size:	220 mm						
Type:	Cube / universal	2 way 90 degree	3 way 90 degree	3 way - T corner	4 way - T with upright	4 way - Cross junction	4 way - cross junction with upright
Main Tube:	50mm x 3 mm						
Materials:	Aluminum alloy 6061-T6						
Finishing:	Washed or Black coated						

T3TC* / T4TC* 290 - 400MM / 11.4 - 15.7" SPIGOT TRIANGULAR TRUSS CORNER



	T3TC21 / BK T4TC21 / BK	T3TC22 / BK T4TC22 / BK	T3TC23/ BK T4TC23/ BK	T3TCT3/ BK T4TCT3/ BK	T3TCT31/ BK T4TCT31/ BK	T3TCT32 / BK T4TCT32 / BK	T3TCC31L / BK T4TCC31L / BK
Truss Size:	290mm / 11.4" - T3TC* 400mm / 15.7" - T4TC*						
Type:	2 way corner	2 way corner apex in	2 way corner apex out	3 way T	3 way T upright apex up	3 way T upright apex down	3 way corner apex up, left
Main Tube:	50mm x 3 mm / 2" x 0.1"						
Materials:	Aluminum alloy 6061-T6						
Finishing:	Washed or Black coated						
Rating:	TUV						

All truss corners and junctions, except for "cube" types are designed to be 500mm from truss connections.
For example T3TCT41 is 500 x 500 x 500 mm in size, while T3TCT3 is 500 x 500 x 290 mm



	T3TCC31R / BK T4TCC31R / BK	T3TCC32L /BK T4TCC32L / BK	T3TCC32R /BK T4TCC32R / BK	T3TCX4 / BK T4TCX4 / BK	T3TCT41 / BK T4TCT41 / BK	T3TCT42 / BK T4TCT42 / BK	T3TCX41 / BK T4TCX41 / BK	T3TCX42 / BK T4TCX42 / BK
Truss Size:	290mm / 11.4" - T3TC* 400mm / 15.7" - T4TC*							
Type:	3 way corner apex up, right	3 way corner apex down, left	3 way corner apex down, right	4 way cross junction	4 way T with upright apex up	4 way T with upright, apex down	4 way cross with upright apex up	4 way cross with upright apex down
Main Tube:	50mm x 3 mm / 2" x 0.1"							
Materials:	Aluminum alloy 6061-T6							
Finishing:	Washed or Black coated							
Rating:	TUV							


All pictures of corners are representative and not necessary the exact look of the final product.
These picture will help understand the shapes and purposes of these corners and junctions.

T3FC* / T4FC 290 - 400MM / 11.4 - 15.7" SPIGOT FLAT TRUSS CORNER



	T3FC/ T3FCBK	T3FCB / T3FCBBK	T4FC/ T4FCBK	T4FCB/ T4FCBBK
Truss Size:	290mm / 11.4"		400mm / 15.7"	
Type:	Flat Truss Corner	Flat Truss Junction	Flat Truss Corner	Flat Truss Junction
Main Tube:	50mm x 3 mm / 2" x 0.1"			
Materials:	Aluminum alloy 6061-T6			
Finishing:	Washed or Black coated			
Rating:	TUV			

T3BBC* / T4BBC* 300 - 400MM / 11.8 - 15.7" BOLT BOX TRUSS CORNER

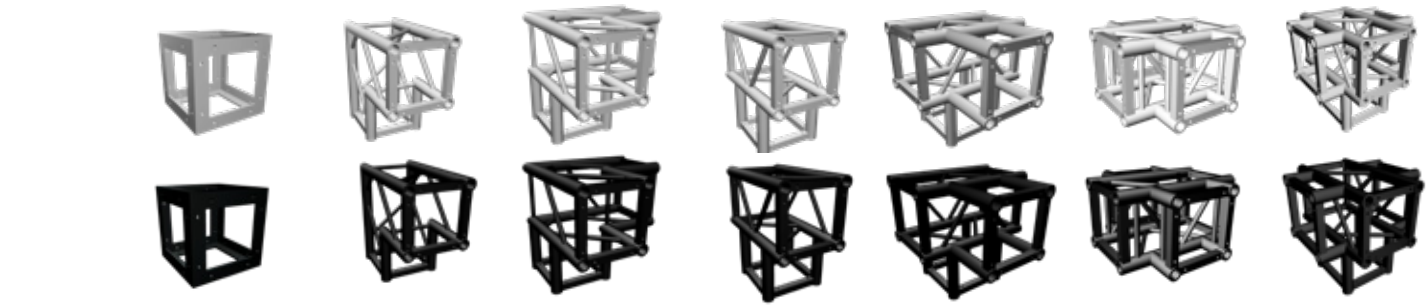

	WT3BBC / BK T4BBC / BK	T3BBC2 / BK T4BBC2 / BK	T3BBC3 / BK T4BBC3 / BK	T3BBCT3 / BK T4BBCT3 / BK	T3BBCT4 / BK T4BBCT4 / BK	T3BBCX4 / BK T4BBCX4 / BK	T3BBC5 / BK T4BBC5 / BK
Truss Size:				300mm / 11.8" - T3BBC* 400mm / 15.7" - T4BBC*			
Type:	Cube / universal	2 way 90 degree	3 way 90 degree	3 way - T corner	4 way - T with upright	4 way - Cross junction	4 way - cross junction
Main Tube:				50mm x 3 mm / 2" x 0.1"			
Materials:				Aluminum alloy 6061-T6			
Finishing:				Washed or Black coated			
Rating:				TUV			

All truss corners and junctions, except for "cube" types are designed to be 500mm from truss connections.
For example T3BBC3 is 500 x 500 x 500 mm in size, while T3BBCT3 is 500 x 500 x 290 mm

T3FBC* / T4FBC* 300 - 400MM / 11.8 - 15.7" BOLT FLAT TRUSS CORNER




	T3FBCH2 / BK T4FBCH2 / BK	T3FBCV2 / BK T4FBCV2 / BK	T3FBHV3 / BK T4FBHV3 / BK	T3FBTV3 / BK T4FBTV3 / BK	T3FBXH4 / BK T4FBXH4 / BK	T3FBXV4 / BK T4FBXV4 / BK	T3FBCCUSTOM / BK T4FBCCUSTOM / BK
Truss Size:				300mm / 11.8" - T3FB* 400mm / 15.7" - T4FB*			
Type:	Horizontal right angle corner	Vertical right angle corner	Horizontal T junction	Vertical T junction	Horizontal cross junction	Vertical cross junction	Custom flat bolt truss corner/junction
Main Tube:				50mm x 3 mm / 2" x 0.1"			
Materials:				Aluminum alloy 6061-T6			
Finishing:				Washed or Black coated			
Rating:				TUV			


All pictures of corners are representative and not necessary the exact look of the final product. These picture will help understand the shapes and purposes of these corners and junctions.

T46BBC* / T610BBC* BOLT RECTANGULAR TRUSS JUNCTION

	T46BBC / T46BBCBK
Truss Size:	400 x 600mm / 15.7 x 23.6"
Type:	Universal cube type junction
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV




	T610BBC / T610BBCBK
Truss Size:	600 x 1000mm / 23.6 x 39.4"
Type:	Universal cube type junction
Materials:	Aluminum alloy 6061-T6
Finishing:	Washed or Black coated
Rating:	TUV




T3TBC* / T4TBC*

300 - 400MM / 11.8 - 15.7" TRIANGULAR BOLT TRUSS CORNER

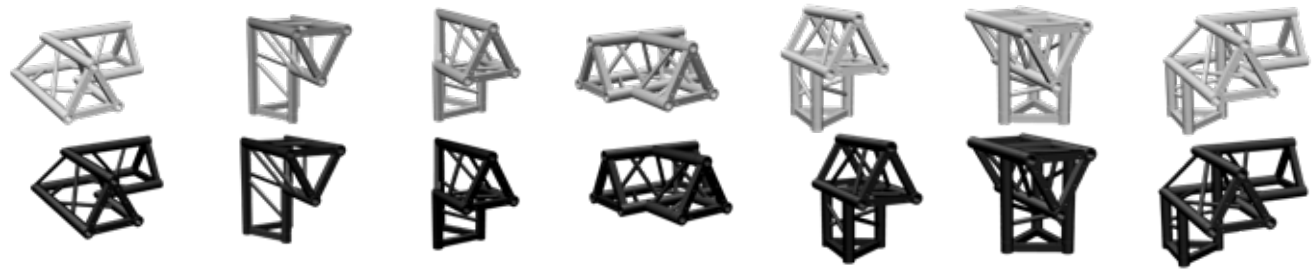

	T3TBC21 /BK T4TBC21 / BK	T3TBC22 / BK T4TBC22 / BK	T3TBC23 / BK T4TBC23/ BK	T3TBCT3 / BK T4TBCT3 / BK	T3TBCT31 / BK T4TBCT31 / BK	T3TBCT32 / BK T4TBCT32 / BK	T3TBCC31L / BK T4TBCC31L / BK
Truss Size:	300mm / 11.8" - T3TBC* 400mm / 15.7" - T4TBC*						
Type:	2 way corner apex up	2 way corner apex in	2 way corner apex out	3 way T apex up / down	3 way T upright apex up	3 way T upright apex down	3 way corner apex up, left
Main Tube:	50mm x 3 mm / 2" x 0.1"						
Materials:	Aluminum alloy 6061-T6						
Finishing:	Washed or Black coated						
Rating:	TUV						

All truss corners and junctions, except for "cube" types are designed to be 500mm from truss connections.
For example T3TBCT42 is 500 x 500 x 500 mm in size, while T3TBCT3 is 500 x 500 x 290 mm

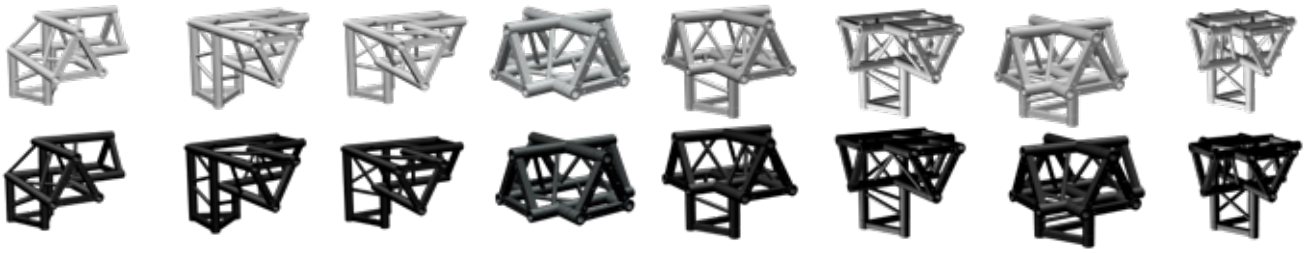


	T3TBCC31R / BK T4TBCC31R / BK	T3TBCC32L / BK T4TBCC32L / BK	T3TBCC32R / BK T4TBCC32R / BK	T3TBCX4 / BK T4TBCX4/ BK	T3TBCT41 / BK T4TBCT41 / BK	T3TBCT42 / BK T4TBCT42 / BK	T3TBCX41 / BK T4TBCX41 / BK	T3TBCX42 / BK T4TBCX42 / BK
Truss Size:	300mm / 11.8" - T3TBC* 400mm / 15.7" - T4TBC*							
Type:	3 way corner apex up, right	3 way corner apex down, left	3 way corner apex down, right	4 way cross junction	4 way T with upright apex up	4 way T with upright, apex down	4 way cross with upright apex up	4 way cross with upright apex down
Main Tube:	50mm x 3 mm / 2" x 0.1"							
Materials:	Aluminum alloy 6061-T6							
Finishing:	Washed or Black coated							
Rating:	TUV							

All pictures of corners are representative and not necessary the exact look of the final product.
These picture will help understand the shapes and purposes of these corners and junctions.

T*BC

SPIGOT RECTANGULAR TRUSS JUNCTION

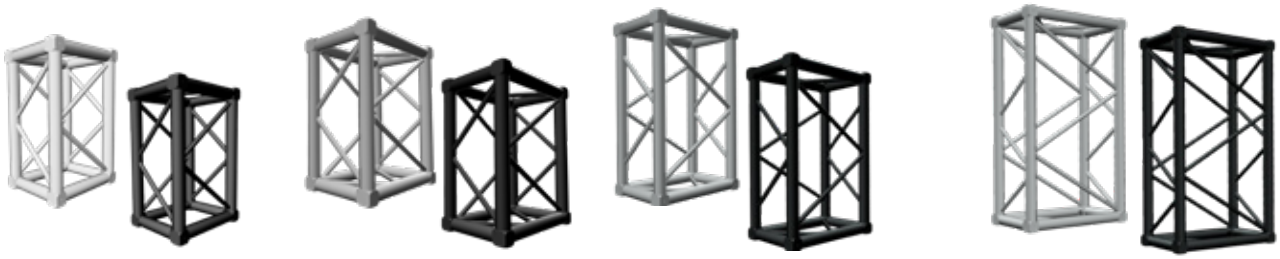

	T46BC / T46BCBK	T56BC / T56BCBK	T57BC / T57BCBK	T610BC / T610BCBK
Truss Size:	400 x 600mm / 15.7 x 23.6"	500 x 600mm / 19.7 x 23.6"	520 x 760mm / 20.5 x 29.9"	600 x 1000mm / 23.6 x 39.4"
Type:	Universal cube type junction			
Materials:	Aluminum alloy 6061-T6			
Finishing:	Washed or Black coated			
Rating:	TUV			

SIDE SUPPORT / FOLDING BASE










	3BTFEET	4BTFEET	T3BSJ/ T3BSJBK	T4BSJ/ T4BSJBK	T3FBASE / T3FBASEBK	T4FBASE / T4FBASEBK
Truss Size:	290mm / 11.4"	390mm / 15.4"	290mm / 11.4"	390mm / 15.4"	290mm / 11.4"	390mm / 15.4"
Type:	Side support feet of truss		Box Truss Spindle Junction Adjustable 450-880mm		Folding base for flat truss	
Materials:	Aluminum alloy 6061-T6					
Finishing:	Washed					
Rating:	TUV					

BASE PLATES

FOR SPIGOT TRUSS, WASHED / BLACK

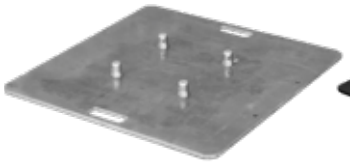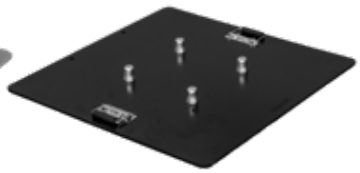	TRUSS TYPE	FITS	SIZE	MATERIAL
TB500A / BK	Box	290mm / 11.4"	500 x 500 mm	Aluminum
TB500A2 / BK	Box	290, 220mm / 11.4, 8.7"	500 x 500 mm	Aluminum
TB750A / BK	Box	290mm / 11.4"	750 x 750 mm	Aluminum
TB750A2 / BK	Box	290, 400mm / 11.4, 15.7"	750 x 750 mm	Aluminum
TB750A3 / BK	Box, Triangular	290, 400mm / 11.4, 15.7"	750 x 750 mm	Aluminum
TB750S / BK	Box	290mm / 11.4"	750 x 750 mm	Steel
TB750S2 / BK	Box	290, 400mm / 11.4, 15.7"	750 x 750 mm	Steel
TB750S3 / BK	Box, Triangular	290, 400mm / 11.4, 15.7"	750 x 750 mm	Steel

FOR BOLT TRUSS, WASHED / BLACK




	TRUSS TYPE	FITS	SIZE	MATERIAL
T3BB500A / BK	Box	300mm / 11.8"	500 x 500 mm	Aluminum
T3BB750A / BK	Box	300mm / 11.8"	750 x 750 mm	Aluminum
T3BB750A2 / BK	Box	300, 400mm / 11.8, 15.7"	750 x 750 mm	Aluminum
T3BB750A3 / BK	Box, Triangular	300, 400mm / 11.8, 15.7"	750 x 750 mm	Aluminum
T3BB750S / BK	Box	300mm / 11.8"	750 x 750 mm	Steel
T3BB750S2 / BK	Box	300, 400mm / 11.8, 15.7"	750 x 750 mm	Steel
T3BB750S3 / BK	Box, Triangular	300, 400mm / 11.8, 15.7"	750 x 750 mm	Steel

END PLATES

FOR SPIGOT TRUSS, WASHED / BLACK




	TRUSS TYPE	FITS	SIZE	MATERIAL
TB220A / BK	Box	220mm / 8.7"	220 x 220 mm	Aluminum
TB300A / BK	Box	290mm / 11.8"	290 x 290 mm	Aluminum
TB400A / BK	Box	400mm / 15.7"	400 x 400 mm	Aluminum
T3TEND / BK	Triangular	290mm / 11.8"	290 x 290 mm	Aluminum
T4TEND / BK	Triangular	400mm / 15.7"	400 x 400 mm	Aluminum
T3FEND / BK	Flat	290mm / 11.8"	290 x 290 mm	Aluminum
T4FEND / BK	Flat	400mm / 15.7"	400 x 400 mm	Aluminum

FOR BOLT TRUSS, WASHED / BLACK




	TRUSS TYPE	FITS	SIZE	MATERIAL
T3BBEND / BK	Box	290mm / 11.8"	290 x 290 mm	Aluminum
T4BBEND / BK	Box	400mm / 15.7"	400 x 400 mm	Aluminum
T3TBEND / BK	Triangular	290mm / 11.8"	290 x 290 mm	Aluminum
T4TBEND / BK	Triangular	400mm / 15.7"	400 x 400 mm	Aluminum
T3FBEND / BK	Flat	290mm / 11.8"	290 x 290 mm	Aluminum
T4FBEND / BK	Flat	400mm / 15.7"	400 x 400 mm	Aluminum

LYCRAT*

TRUSS COVER, FITS 210MM, 290MM AND 400MM TRUSS

Lycra truss cover provides the perfect coverage for your truss set-ups. The lycra gives a clean look, ideal for shows, weddings, parties where trussing needs to be hidden. Zips are provided to attach fixtures to truss.



FITS 400MM BOX FITS 400MM TRI	LYCRAT41W LYCRAT41WT	LYCRAT42W LYCRAT42WT	LYCRAT43W LYCRAT43WT	LYCRAT41B LYCRAT41BT	LYCRAT42B LYCRAT42BT	LYCRAT43B LYCRAT43BT
Length:	1m / 3.3ft	2m / 6.6ft	3m / 9.8ft	1m / 3.3ft	2m / 6.6ft	3m / 9.8ft
Colour:	White	White	White	Black	Black	Black
Zips (pairs)	1	3	4	1	3	4
Coating:	Fire retardant coating (ammonium polyphosphate)					

FITS 220MM	LYCRAT21W	LYCRAT22W	LYCRAT23W	LYCRAT21B	LYCRAT22B	LYCRAT23B
Length:	1m / 3.3ft	2m / 6.6ft	3m / 9.8ft	1m / 3.3ft	2m / 6.6ft	3m / 9.8ft
Colour:	White	White	White	Black	Black	Black
Zips (pairs)	1	3	4	1	3	4
Coating:	Fire retardant coating (ammonium polyphosphate)					

FITS 290MM BOX FITS 290MM TRI	LYCRAT1W LYCRAT1WT	LYCRAT2W LYCRAT2WT	LYCRAT3W LYCRAT3WT	LYCRAT1B LYCRAT1BT	LYCRAT2B LYCRAT2BT	LYCRAT3B LYCRAT3BT
Length:	1m / 3.3ft	2m / 6.6ft	3m / 9.8ft	1m / 3.3ft	2m / 6.6ft	3m / 9.8ft
Colour:	White	White	White	Black	Black	Black
Zips (pairs)	1	3	4	1	3	4
Coating:	Fire retardant coating (ammonium polyphosphate)					



T1200C*

SPIGOT BOX TRUSS TOP CIRCLE, 1200MM DIAMETER

	T1200C	T1200C2	T1200CBK	T1200C2BK
Truss size:	290mm / 11.4"	400mm / 15.7"	290mm / 11.4"	400mm / 15.7"
Diameter:	1200mm / 47.2"		1200mm / 47.2"	
Colour:	Washed		Black	



SPIGOTS, COUPLERS, CLIPS, PINS











	T60C1	T60C1B8	T60C1B10	T60C1B12	T60C1C	T60C2	T60LCIP / BK	T60HINGE/ BK	T60PIN / BK
Fits:					60mm tube				
Type:	Single Coupler	Single Coupler	Single Coupler	Single Coupler	Single Coupler	Double Coupler	Clip	Coupler	Pin
	M10 bolt, no location pin	M8 bolt, location pin	M10 bolt, location pin	M12 bolt, location pin	M10 bolt, location pin	Double coupler	Clip for couplers	Hinged double coupler	Pin for clips
Colour:	Washed	Washed	Washed	Washed	Washed	Washed	Washed / Black	Washed / Black	Washed / Black











	T30C1	T30C1B8	T30C1B10	T30C1B12	T30C1C	T30C2	T30LCIP / BK	T30HINGE/ BK	T30PIN / BKK
Fits:					30mm tube				
Type:	Single Coupler	Single Coupler	Single Coupler	Single Coupler	Single Coupler	Double Coupler	Clip	Coupler	Pin
	M10 bolt, no location pin	M8 bolt, location pin	M10 bolt, location pin	M12 bolt, location pin	M10 bolt, location pin	Double coupler	Clip for couplers	Hinged double coupler	Pin for clips
Colour:	Washed	Washed	Washed	Washed	Washed	Washed	Washed / Black	Washed / Black	Washed / Black










	T30C1	T30C1B8	T30C1B10	T30C1B12	T30C1C	T30C2	T30LCIP / BK	T30HINGE/ BK	T30PIN / BKK
Fits:					30mm tube				
Type:	Single Coupler	Single Coupler	Single Coupler	Single Coupler	Single Coupler	Double Coupler	Clip	Coupler	Pin
	M10 bolt, no location pin	M8 bolt, location pin	M10 bolt, location pin	M12 bolt, location pin	M10 bolt, location pin	Double coupler	Clip for couplers	Hinged double coupler	Pin for clips
Colour:	Washed	Washed	Washed	Washed	Washed	Washed	Washed / Black	Washed / Black	Washed / Black

TRUSS TOWER LIFTS



	3BGS	4BSG
Truss type:	290mm / 11.4" box	400mm / 15.7" box
Type:	Ground support	





	3BSB	3BSBBK	4BSB	4BSBBK	3BSB4	3BSB4BK	3BSB46	3BSB46BK	3BSB4WP	3BSB4WPBK
Truss type:	290mm / 11.4" box		400mm / 15.7" box		290 - 400mm / 11.4 - 15.7"box		400 - 400x600mm / 15.7 - 15.7x23.6" box		290 - 400mm / 11.4 - 15.7"box	
Type:	Sleeve block				Sleeve block		Sleeve block		Sleeve block (whole piece with holes)	
Finishing:	Washed	Black	Washed	Black	Washed	Black	Washed	Black	Washed	Black



	3BGSS	4BGSS
Truss type:	290mm / 11.4" box	400mm / 15.7" box
Type:	Sub support	
Finishing:	Washed	



	3BOR	3BORBK
Truss type:	290mm / 11.4" box	
Type:	Outrigger	
Finishing:	Washed	Black









	3BB	3BBBK	4BB	4BBBK	3BTBR
Truss type:	290mm / 11.4" box		400mm / 15.7" box		290mm / 11.4" box
Type:	Dead weight dumper				Mount plate for winch
Finishing:	Washed	Black	Washed	Black	










	3BTS	3BTSBK	4BTS	4BTSBK	3BTSL	3BTSLBK	4BTSL	4BTSLBK
Truss type:	290mm / 11.4" box		400mm / 15.7" box		290mm / 11.4" box		400mm / 15.7" box	
Type:	Top msectioon				Line Array top msectioon			
Finishing:	Washed	Black	Washed	Black	Washed	Black	Washed	Black

LINE ARRAY TRUSS SYSTEM

LINE ARRAY STAND SYSTEM 6M / 19.7FT HIGH

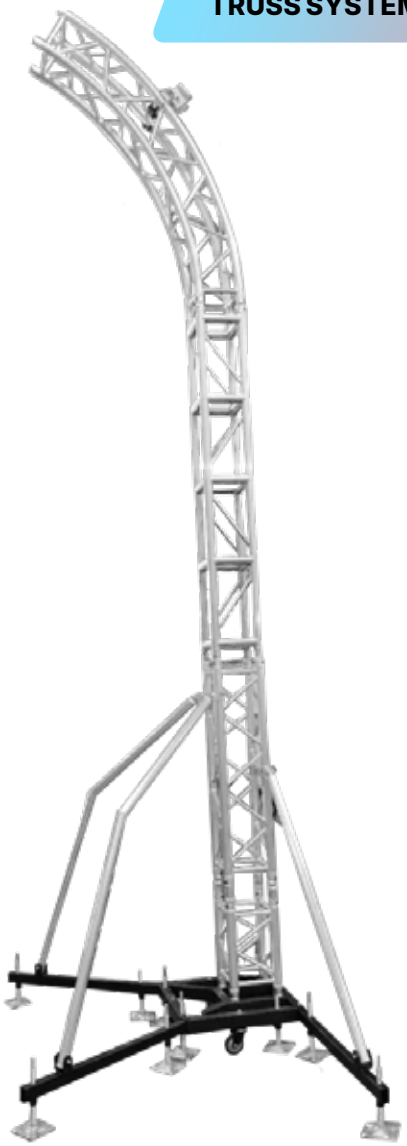


	3BTLAC7PACK
Height	6m / 19.7ft
Load Capacity:	480 kg / 1058 lbs
Truss type:	290mm / 11.4"
Coating:	Washed or Black

LINE ARRAY TRUSS SYSTEM INCLUDES:	
1 x 3BTSL	290mm / 11.4" Box Truss Line Array Top section
1 x T3BD1.5R2	Curved 290mm / 11.4" Box Truss - 2m / 6.6ft
1 x 3BTROLL	Wheels connection part
1 x 3BTLABASE	Black base
1 x T3BD05	290mm / 11.4" box truss - 0.5m / 1.6ft
2 x T3BD2	290mm / 11.4" box truss - 2m / 6.6ft
1 x 3BTBR	Horizontal truss mount plate for winch
12 x TC2	Trussing Double Coupler / Spigot
36 x TCLIP	Trussing Clip
36 x TPIN	Trussing Pin
2 x THINGE	Trussing Coupler / Spigot Hinge
4 x 3BOR	Box Truss Ground Support Outrigger

SPEAKER TRUSS SYSTEM

290 X290 MM / 11.4 X 11.4" TRUSS. HEIGHT 6M / 19.7FT



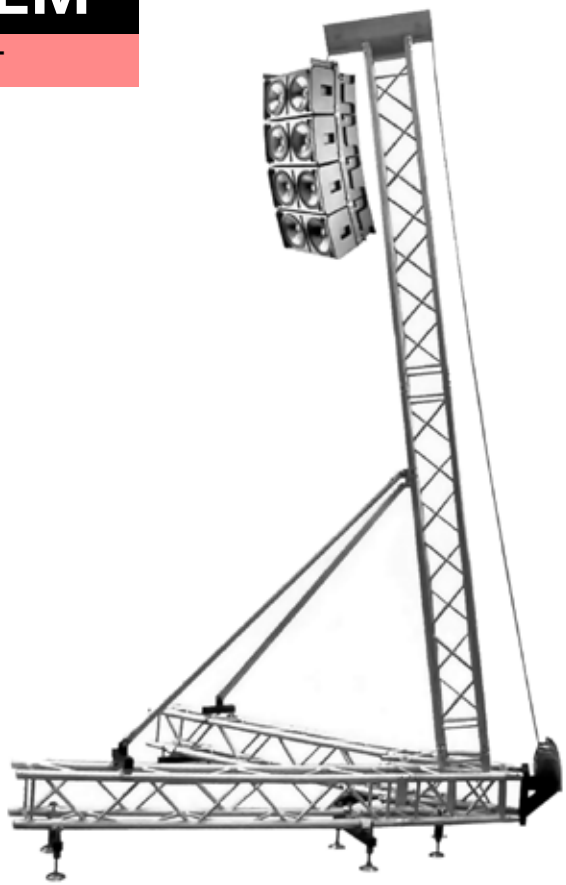


	3BTLAC6PACK / 3BTLAC6PACKBK
Height	6m / 19.7ft
Load Capacity:	500 kg - 600 kg / 1102 - 1323 lbs
Truss type:	290mm / 11.4"
Coating:	Washed or Black

CUSTOM TRUSS

TRUSS STRUCTURES

Truss structures using a combination of truss raising stands, truss lengths and junctions can be designed and produced to suit the requirements of any event. From basic arches, to large concert sized structures, our team can produce a tailor made solution for any situation. Here are some examples.

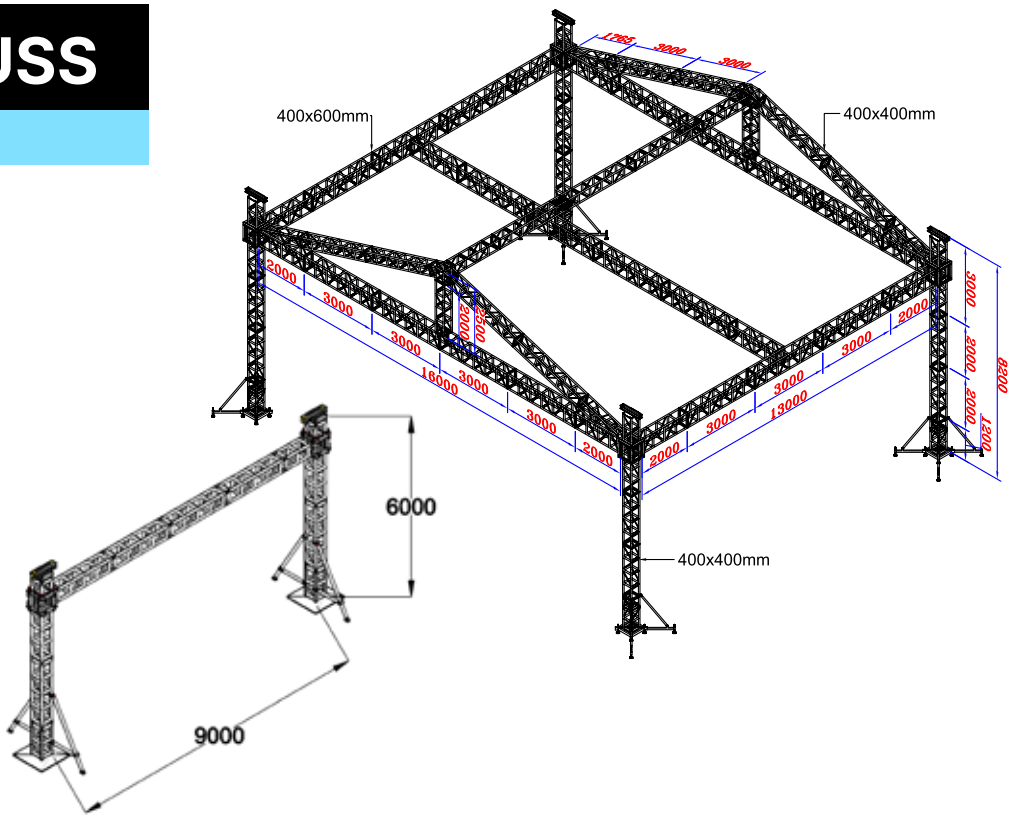


IRREGULAR TRUSSING


Any shape, any configuration, any design you can dream of - it is all possible. Our team of engineers can design truss in any shape, using any dimensions you use, while our manufacturing team will produce the product to our high standards. Whether it be circular, triangular, star shape, or three dimensional - you name it, we can produce it.








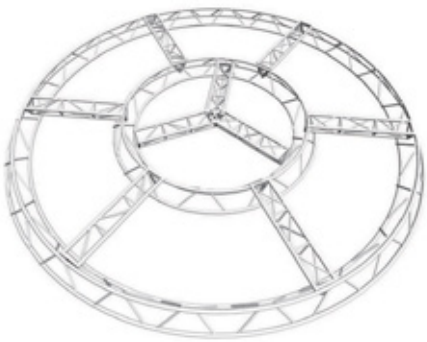

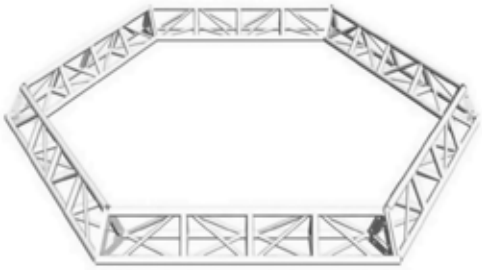


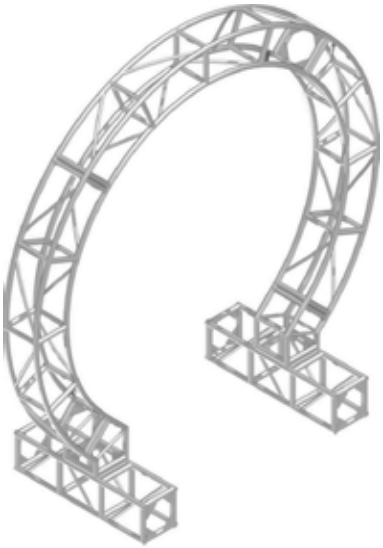



STAGE TOPS

STAGE TOP WITH RAIL LOCK SYSTEM

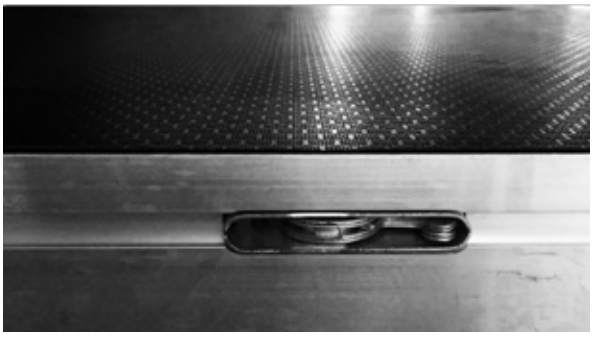

COFFIN LATCH



STANDARD LATCH

	ST1010 / STC1010	ST1203	ST1206 / STC1206	ST1209	ST1212 / STC1212	ST1212ARC
Type:	STAGE TOP	STAGE TOP	STAGE TOP	STAGE TOP	STAGE TOP	QUARTER CURVE STAGE TOP
Latch type:	Standard / Coffin	Standard	Standard / Coffin	Standard	Standard / Coffin	Standard
Size:	1000 x 1000mm / 39.4" x 39.4"	1220 x 305mm / 48.0" x 12.0"	1220 x 610mm / 48.0" x 24.0"	1220 x 915mm / 48.0" x 36.0"	1220 x 1220mm / 48.0" x 48.0"	1220 x 1220mm / 48.0" x 48.0"
Average load:	650 kg / 1433 lbs	500 kg / 1102 lbs	850 kg / 1874 lbs	725 kg / 1598 lbs	950 kg / 2094 lbs	1750 kg / 3858 lbs
Centre point load:	325 kg / 716.50 lbs	350 kg / 772 lbs	550 kg / 1213 lbs	360 kg / 794 lbs	500 kg / 1102 lbs	750 kg / 1653 lbs
Material:	18mm Plywood and Aluminium					
Pattern:	Anti Skid Black Hex					
Certificiation:	TUV					

	ST1806 / STC1806	ST1812 / STC1812	ST2010 / STC2010	ST2406 / ST2C406	ST2410	ST2412/ STC2412
Type:	STAGE TOP	STAGE TOP	STAGE TOP	STAGE TOP	STAGE TOP	STAGE TOP
Latch type:	Standard / Coffin	Standard / Coffin	Standard / Coffin	Standard / Coffin	Standard	Standard / Coffin
Size:	1830 x 610mm / 72.0" x 24.0"	1800 x 1200mm / 70.9" x 48.0"	2000 x 1000mm / 78.7" x 39.4"	2440 x 610mm / 96.1" x 24.0"	2400 x 1000mm / 94.5" x 39.4"	2440 x 1220mm / 96.1" x 48.0"
Average load:	1130 kg / 2491 lbs	1450 kg / 3197 lbs	1300 kg / 2866 lbs	1110 kg / 2425 lbs	1560 kg / 3439 lbs	1750 kg / 3858 lbs
Centre point load:	500 kg / 1102 lbs	725 kg / 1598 lbs	650 kg / 1433 lbs	500 kg / 1102 lbs	780 kg / 1720 lbs	750 kg / 1653 lbs
Material:	18mm Plywood and Aluminium					
Pattern:	Anti Skid Black Hex					
Certification:	TUV					

STAGE LEGS / CASTORS

50M STAGE LEGS / ADJUSTABLE STAGE LEGS



	SL02	SL03	SL06	SL09	SL012
Type:	Stage leg				
Length:	195 - 225mm / 7.7" - 8.9"	295 - 325mm/ 11.6" x 12.8"	595 - 625mm / 23.4" - 24.6"	895 - 925mm / 35.2" x 36.4"	1195 - 1225mm / 47" x 48.2"
Main tube diameter:	50mm / 2"				
Foot diameter:	70mm / 2.8"				



	SL0406	SL0610	SL1015
Type:	Adjustable Stage Legs		
Length:	320 - 490mm / 12.6" - 19.3"	520 - 890mm / 20.5" - 35.0"	1000 - 1500mm / 39.4" - 59.1"
Main tube diameter:	50mm / 2"		
Foot diameter:	70mm / 2.8"		

STAGE CASTORS



	SLCL	SLC
Type:	Stage top	Stage leg castor
Lock:	Yes	No
Tread:	M16	M16

STAGE ACCESSORIES






	SKIRT300 / SKIRT300W	SKIRT600 / SKIRT600W	SKIRT900 / SKIRT900W	SKIRT1200 / SKIRT1200W
Type:	SKIRT FOR STAGE TOP			
Length:	2440mm / 96.1"			
Height:	300mm / 11.8"	600mm / 23.6"	900mm / 35.4"	1200mm / 47.2"
Material:	100% Polyester with flame retardant coating and velcro			




LEG CLAMP	SL2C	SL4C
Type:	TWO WAY	FOUR WAY
Finishing:	Black	
Material:	Steel	



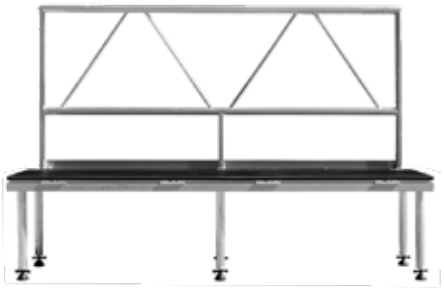


	SR10	SR12	SR20	SR24
Type:	STAGE GUARD RAIL			
Width:	1000mm / 39.4"	1220mm / 48.0"	2000mm / 78.7"	2440mm / 96.1"
Finishing:	Washed			
Material:	Aluminium 6061-T6			





Stage Clamp allows connecting different types of stage tops


	SRC
Type:	STAGE CLAMP
Finishing:	Black
Material:	Steel

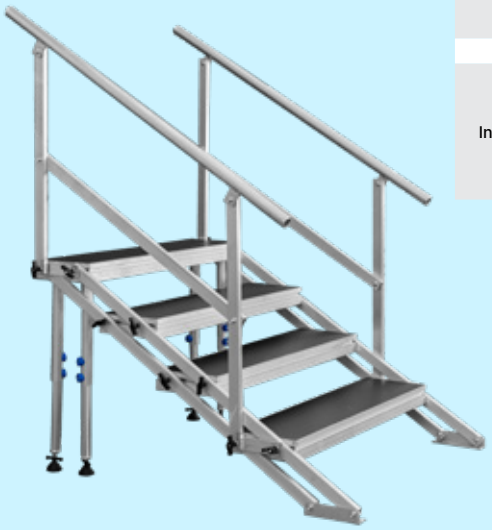

	SSTAIRS3	SSTAIRS4	SSTAIRS5
Type:	STAGE STAIR STEPS PACKAGE		
Includes:	SSSTEP x 2 ST1203 x 1 SS3 (pair of step support rail) x 1 Stage legs x 4 SL2C (two-way leg clamp) x 2	SSSTEP x 3 ST1203 x 1 SS4 (pair of step support rail) x 1 SS4R (one side hand rail) Stage legs x 4 SL2C (two-way leg clamp) x 2	SSSTEP x 4 ST1203 x 1 SS5 (pair of step support rail) x 1 SS5R (one side hand rail) Stage legs x 4 SL2C (two way leg clamp) x 2




	SSSTEP
Type:	STAIR STEP
Size:	1200 x 300mm / 47.2 x 11.8"
Material:	Plywood and Aluminium



	SS3R	SS4R	SS5R	SS8R
Type:	Stage Stairs Hand Rails			
Steps:	3	4	5	8
Material:	Aluminium			

	SS2	SS3	SS4	SS5	SS8
Type:	Stage rails (pair)				
Steps:	2	3	4	5	8
Length:	200 to 600mm / 7.9" to 23.6"	500 to 800mm / 19.7" to 31.5"	600 to 1000mm / 23.6" to 39.4"	800 to 1200mm / 31.5" to 47.2"	1000 to 1500mm / 39.4" to 59.1"
Size:	1830 x 610mm / 72.0" x 24.0"	1800 x 1200mm / 70.9" x47.2"	2000 x 1000mm / 78.7" x 39.4"	2440 x 610mm/ 96.1" x 24.0"	2400 x 1000mm / 94.5" x 39.4"
Material:	Aluminium				



BRACED STAGING SYSTEM

QUICK SET UP, VERY STABLE USING LEGS AND BRACES



	STB1010	STB2010	STB1212	STB2412
Type:	STAGE TOP			
Size:	1000 x 1000mm / 39.4" x 39.4"	2000 x 1000mm / 78.7" x 78.7"	1220 x 1220mm / 48.03" x 48.03"	2400 x 1220mm / 94.05" x 48.03"
Max. Load:	1100 kg / 2425 lbs			
Material:	18mm / 0.7" waterproof plywood			
Pattern:	ANTI SKID BLACK HEX			
Certification:	TUV			

	STB1010T
Type:	TRANSPARENT STAGE TOP
Size:	1000 x 1000mm / 39.4" x 39.4"
Max. load:	750 kg / 1654 lbs
Material:	Acrylic
Pattern:	ANTI SKID TRANSPARENT
Certification:	TUV



	SLB06	SLB09	SLB12
Type:	STAGE LEG FOR BRACE TRUSS		
Length:	600mm / 23.6"	900mm / 35.4"	1200mm / 47.2"

	SLB0406	SLB0610	SLB1015
Type:	STAGE LEG FOR BRACE TRUSS ADJUSTIBLE		
Length:	400 - 600mm / 15.7" - 23.6"	600 - 1000mm / 23.6" - 39.4"	1000 - 1500mm / 39.4" - 59.1"

	SBB10	SBB20	SBB12	SBB24
Type:	BRACE			
Length:	1000mm / 39.4"	2000mm / 78.7"	1220mm / 48.0"	2440mm / 96.0"

BRACED STAGING STEPS



	SSB2	SSB3	SSB4	SSB5	SSB8
Type:	STEP RAILS				
Length:	400mm / 15.7"	600mm / 23.6"	800mm / 31.5"	900-1000mm / 35.4" - 39.4"	1500mm / 59.1"
Number of steps:	2	3	4	5	8

	SRB10	SRB20	SRB12	SRB24
Type:	STAGE RAIL			
Length:	1000mm / 39.4"	2000mm / 78.7"	1220mm / 48.0"	2440mm / 96.0"

	SSBSTEP
Type:	Stair step to suit SSB 2 / 3 / 4 / 5 / 8
Material:	Plywood and Aluminium

	SSB4R	SSB5R	SSB8R
Type:	HAND RAILS		
Length (mm / inches):	400mm / 15.7"	600mm / 23.6"	800mm / 31.5"
Number of steps:	2	3	4

FOLDING LEG STAGING

QUICK SET UP, VERY STABLE USING LEGS AND BRACES



	STF1010	STF2010
Type:	FOLDING LEG STAGE TOP	
Size:	1000 x 1000mm / 39.4" x 39.4"	2000 x 1000mm / 78.7" x 78.7"
Max. load:	750 kg/m2	
Material:	12mm / 0.5" non-slip wood	
Frame:	ALUMINUM	
Certification:	TUV	

	STF0410
Type:	STEP TOP
Size:	1000 x 400mm / 39.4" x 15.7"
Max. load:	750 kg/m2
Material:	12mm / 0.5" non-slip wood
Frame:	ALUMINUM
Certification:	TUV

	SLF04	SLF042	SLF06	SLF062	SLF10	SLF102
Type:	FOLDING LEGS FOR STAGE TOP					
Legs height:	400mm / 15.7"	400mm / 15.7"	600mm / 23.6"	600mm / 23.6"	1000mm / 39.4"	1000mm / 39.4"
Suits stage top:	1000 x 1000mm / 39.4" x 39.4"	2000 x 1000mm / 78.7" x 39.4"	1000 x 1000mm / 39.4" x 39.4"	2000 x 1000mm / 78.7" x 39.4"	1000 x 1000mm / 39.4" x 39.4"	2000 x 1000mm 78.7" x 39.4"





STEPS

	STF0410
Type:	STEP TOP FOR FOLDING LEG STAGE
Size:	1000 x 400mm / 39.4 x 15.7"



	SLFS200	SLFS250	SLFS400	SLFS500	SLFS750
Type:	FOLDING LEGS FOR STEPS				
Length:	200mm / 7.9"	250mm / 9.8"	400mm / 15.7"	500mm / 15.7"	750mm / 29.5"

	SLFCLIP
Type:	CLIP FOR SECURING STAGE LEGS

CROWD BARRIERS

Crowd barriers offer protection and security for stages. Their features are stability, pressure resistance, quick and easy construction, adaptability, and transport efficiency.



	CB1MK2	CB1MK2BK
Type:	Crowd barrier	
Width:	1m / 3.3ft	
Folded for transport at:	1 x 1.25 x 0.15m / 3.3ft x 4.1ft x 0.5ft	
Standard size:	1 x 1 x 1.25m / 3.3ft x 3.3ft x 4.1ft	
Free standing:	Yes	
Material:	Aluminium	
Finishing:	Washed	Black



	CB1GMK2	CB1GMK2BK
Type:	Crowd barrier with gate	
Width:	1m / 3.3ft	
Folded for transport at:	1 x 1.25 x 0.15m / 3.3ft x 4.1ft x 0.5ft	
Standard size:	1 x 1 x 1.25m / 3.3ft x 3.3ft x 4.1ft	
Free standing:	Yes	
Material:	Aluminium	
Finishing:	Washed	Black



	CB1GMK2	CB1GMK2BK
Type:	Crowd barrier 90 dergree corner	
Width:	1m / 3.3ft	
Folded for transport at:	1 x 1.25 x 0.15m / 3.3ft x 4.1ft x 0.5ft	
Standard size:	1 x 1 x 1.25m / 3.3ft x 3.3ft x 4.1ft	
Free standing:	Yes	
Material:	Aluminium	
Finishing:	Washed	Black





	CB1PMK2	CB1PMK2BK
Type:	Crowd barrier pass through model	
Width:	1m / 3.3ft	
Folded for transport at:	1 x 1.25 x 0.15m / 3.3ft x 4.1ft x 0.5ft	
Standard size:	1 x 1 x 1.25m / 3.3ft x 3.3ft x 4.1ft	
Free standing:	Yes	
Material:	Aluminium	
Finishing:	Washed	Black

	CBTROLLEYA
Type:	Heavy duty foldable stackable crowd barrier tolley
Holds up:	10 pieces CB1MK2 Crowd Barrier
Standard size:	1.37 x 1.05 x 1.63m / 4.5ft x 3.4ft x 5.3ft
Castors included:	Yes
Material:	Aluminium
Finishing:	Washed

	CB1WEDGE / CB1WEDGEBK
Type:	Wedge for CB1MK2 Crowd Barrier
Material:	Aluminium
Finishing:	Washed / Black

BARRIER CAGE

Protect lighting and other fixtures from impacts at ball courts, soccer fields and the like using protective barrier cages. Constructed from a combination of standard and custom flat truss, tube truss, junctions and heavy duty mesh, barrier cages come standard in 1, 2 or 3m lengths, or can be customised for any size desired. Fixtures can be mounted on the central flat truss, and with an internal height of 1m above the truss, almost any product can be installed, using standard 50mm clamps. Easy access for maintenance or changing fixtures via the curved opening.





CLAMPS

HOOK / PIPE / TRIGGER CLAMPS

Necessary for every job, Event Lighting clamps are produced from high quality aluminium and are TUV certified. Our range includes many options as well as safety chains and boom arms.



	CLAMPG50/50S/50L/50LS
Type:	Hook Clamp
Pipe size:	35-51mm / 1.2-2.0" tube
Width:	25mm / 2"
WLL:	50/150/75/75 kg / 110/331/165/156 lbs
Bolt:	M10x30
Material:	Steel
Certification:	TUV





	CLAMPP50W/CLAMPP50WS
Type:	Pipe Clamp
Pipe size:	35-51mm tube / 1.2- 2.0" tube
Width:	50mm / 2"
WLL:	500 kg / 1102 lbs
Bolt:	M10x30
Material:	Aluminium 6061-T6
Certification:	TUV



	CLAMPP50/CLAMPP50S
Type:	Pipe Clamp
Pipe size:	35-51mm / 1.2- 2.0" tube
Width:	30mm /1.2"
WLL:	300 kg / 661 lbs
Bolt:	M10x30
Material:	Aluminium 6061-T6
Certification:	TUV



	CLAMPP50L/CLAMPP50LS
Type:	Pipe Clamp
Pipe size:	46-51 mm / 1.8- 2.0" tube
Width:	30 mm / 1.2"
WLL:	75 kg / 165 lbs
Bolt:	M10x30
Material:	Aluminium 6061-T6
Certification:	TUV



	CLAMPT50/50S/50L/50LS
Type:	Trigger Clamp
Pipe size:	38-51mm / 1.5-2.0" tube
Width:	30mm / 1.2"
WLL:	50/150/75/75 kg / 110/331/165/156 lbs
Bolt:	M12x30 and M10x30
Material:	Aluminium 6061-T6
Certification:	TUV



	CLAMPTG50/CLAMPTG50S
Type:	Trigger G Clamp
Pipe size:	48-51mm / 1.9-2.0" tube
Width:	28mm / 1.1"
WLL:	150 kg / 331 lbs
Bolt:	M10x30
Material:	Aluminium 6061-T6
Certification:	TUV



	CLAMPTQ50/CLAMPTQ50S
Type:	Trigger Clamp
Pipe size:	48-51mm / 1.9-2.0" tube
Width:	28mm / 1.1"
WLL:	150 kg / 331 lbs
Bolt:	M10x30
Material:	Aluminium 6061-T6
Certification:	TUV

CLAMPS

PIPE CLAMPS AND PACKAGES



PIPE CLAMP AND COUPLER

PACKAGE INCLUDES:	
1X CLAMPP	PIPE CLAMP
1X TC1	TRUSSING COUPLER
1X TPIN	TRUSSING PIN
1X TCLIP	TRUSSING CLIP

PIPE CLAMP AND EYENUT

PACKAGE INCLUDES:	
1X CLAMPP	PIPE CLAMP
1X CLAMPPEYENUT	EYE NUT



	CLAMPP60 / CLAMPP60S
Type:	Pipe Clamp
Pipe size:	58-61mm / 2.3-2.4" tube
Width:	30mm / 1.2"
WLL:	500 kg / 1102 lbs
Bolt:	M10x30
Material:	Aluminium 6061-T6
Certification:	TUV



	CLAMPP38LB/CLAMPP38LS
Type:	Pipe Clamp
Pipe size:	35-40mm / 1.4-1.6"
Width:	30mm / 1.2"
WLL:	75 kg / 165 lbs
Bolt:	M10x30
Material:	Aluminium 6061-T6
Certification:	TUV



	CLAMPP30LB/CLAMPP30LS
Type:	Pipe Clamp
Pipe size:	30-35mm / 1.2-1.4" tube
Width:	30mm /1.2"
WLL:	100 kg / 220 lbs
Bolt:	M8x30
Material:	Aluminium 6061-T6
Certification:	TUV



	CLAMPP25LB/CLAMPP25LS
Type:	Pipe Clamp
Pipe size:	23-27mm / 0.9-1.1" tube
Width:	25mm / 1.0"
WLL:	60 kg / 132 lbs
Bolt:	M8x30
Material:	Aluminium 6061-T6
Certification:	TUV



	CLAMPP20LB/CLAMPP20LS
Type:	Trigger Clamp
Pipe size:	19-23mm /0.7-0.9" tube
Width:	25mm / 1.0"
WLL:	60 kg / 132 lbs
Bolt:	M18x30
Material:	Aluminium 6061-T6
Certification:	TUV

CLAMPS

DOUBLE SWIVEL PIPE CLAMPS



	CLAMPDPW50/CLAMPDPW50S
Type:	Double Swivel Pipe Clamp
Pipe size:	38-51mm / 1.5-2.0" tube
Width:	50mm / 2.0"
WLL:	500 kg / 1102 lbs
Lockable:	at 90°/180°
Material:	Aluminium 6061-T6
Certification:	TUV



	CLAMPDP50/CLAMPDP50S
Type:	Double Swivel Pipe Clamp
Pipe size:	38-51mm / 1.5-2.0" tube
Width:	30mm / 1.2"
WLL:	300 / 75 kg 661 / 165 lbs
Lockable:	at 90°/180°
Material:	Aluminium 6061-T6
Certification:	TUV



	CLAMPDP50L/CLAMPDP50LS
Type:	Double Swivel Pipe Clamp
Pipe size:	38-51mm / 1.5-2.0" tube
Width:	30mm / 1.2"
WLL:	75 kg / 165 lbs
Lockable:	-
Material:	Aluminium 6061-T6
Certification:	TUV



	CLAMPDP38B/CLAMPDP38S
Type:	Double Swivel Pipe Clamp
Pipe size:	35-40mm / 1.4-1.6"
Width:	30mm / 1.2"
WLL:	75 kg / 165 lbs
Lockable:	-
Material:	Aluminium 6061-T6
Certification:	TUV



	CLAMPDP30B/CLAMPDP30S
Type:	Double Swivel Pipe Clamp
Pipe size:	30-35mm / 1.2-1.4" tube
Width:	30mm / 1.2"
WLL:	100 kg / 220 lbs
Lockable:	-
Material:	Aluminium 6061-T6
Certification:	TUV





	CLAMPDP25B/CLAMPDP25S
Type:	Double Swivel Pipe Clamp
Pipe size:	23-27mm / 0.9-1.1" tube
Width:	25mm / 1.0"
WLL:	60 kg / 132 lbs
Lockable:	-
Material:	Aluminium 6061-T6
Certification:	TUV



	CLAMPP20LB/CLAMPP20LS
Type:	Double Swivel Pipe Clamp
Pipe size:	19-23mm /0.7-0.9" tube
Width:	25mm / 1.0"
WLL:	60 kg / 132 lbs
Lockable:	-
Material:	Aluminium 6061-T6
Certification:	TUV

UNIVERSAL CLAMPS





	CLAMPB160 / CLAMPB160S
Type:	Universal Hocker/Marquee Beam Clamp
Fits Beam Width:	40-130mm / 1.6-5.1"
Threaded Hole Size:	2x M10, 2x M12, 1x M14
WLL	100 kg / 220 lbs
Material:	Steel



	CLAMPR50
Type:	Universal (Any Shape) Beam Clamp
Fits:	Any shape, any tube up to 50mm
WLL	25 kg / 55 lbs
Certification:	TUV

MULTIPLE DIAMETER CLAMP

SUITS PIPES 25MM, 38MM AND 50MM

The CLAMPE38 is a light duty tubes clamp for attaching your lighting fixtures to your stands and trussing. Designed with removable adapters allowing it to fit a variety of stand and trussing diameters: 25mm, 38mm and 50mm.



	CLAMPE38
Type:	Variable Diameter Clamp
Pipe size:	25, 38 or 50mm / 1.0, 1.5 or 2.0" tube
WLL:	25 kg / 55 lbs
Bolt:	M10
Material:	Plastic
Certification:	TUV

BOOMARMS

DOUBLE SWIVEL PIPE CLAMPS





	BOOMARM105	BOOMARM105B	BOOMARM205	BOOMARM205B
Type:	Boom Arm with Single Pipe Clamp		Boom Arm with Double Pipe Clamp	
Pipe Length:	500mm / 19.7″			
Pipe Thickness:	3mm / 0.1″			
Pipe Clamp Fit:	38-51mm / 1.5-2.0" tube			
Pipe Clamp Width:	50mm / 2.0″			
WLL:	80 kg / 176 lbs		150 kg / 331 lbs	
Materials:	Materials: Aluminum alloy 6061-T6			
Finishing:	Washed	Black coated	Washed	Black coated

ACCESSORIES

TRUSS HANGERS, EYENUTS, SAFETY WIRES





	THANGER
Type:	Truss Hanger
WLL:	300 kg / 661 lbs
Fits:	Up to 520mm / 20.5″ truss
Clampps:	2 x movable clamps
Material:	Aluminium 6061-T6
Certification:	TUV



	CLAMPPEYENUT	CLAMPPEYENUTS
Type:	Eye Nut and Bolt	
WLL:	230 kg / 507 lbs	
Bolt:	M10x20	
Material:	Aluminium 6061-T6	
Certification:	TUV	
Finishing:	Black coated	Washed





	SW3X800PC/PB	SW4X800PC/PB
Type:	Safety wire	
Length:	800mm / 31.5"	
Thickness:	3mm / 0.1"	4mm / 0.2″
WLL:	40 kg / 88 lbs	120 kg / 265 lbs
Dead weight break point:	230 kg / 507 lbs	320 kg / 705 lbs
Material:	PVC coated steel	
Certification:	TUV	
Finishing:	Washed / Black	Washed / Black

	SW4X800SSS/SSB	SW5X1000PC/PB	SW4X800PCS/PBS
Type:	Safety wire outdoor	Safety wire	Safety wire with screw
Length:	800mm / 31.5"	1000mm / 39.4"	800mm / 31.5"
Thickness:	4mm / 0.2″	5mm / 0.2″	4mm / 0.2"
WLL:	120 kg / 265 lbs	150 kg / 331 lbs	120 kg / 265 lbs
Dead weight break point:	320 kg / 705 lbs	605 kg / 1334 lbs	320 kg / 705 lbs
Material:	PVC coated steel		
Certification:	TUV		
Finishing:	Washed / Black	Washed / Black	Washed / Black

















EVENT
LIGHTING
lite

ENGINEERING

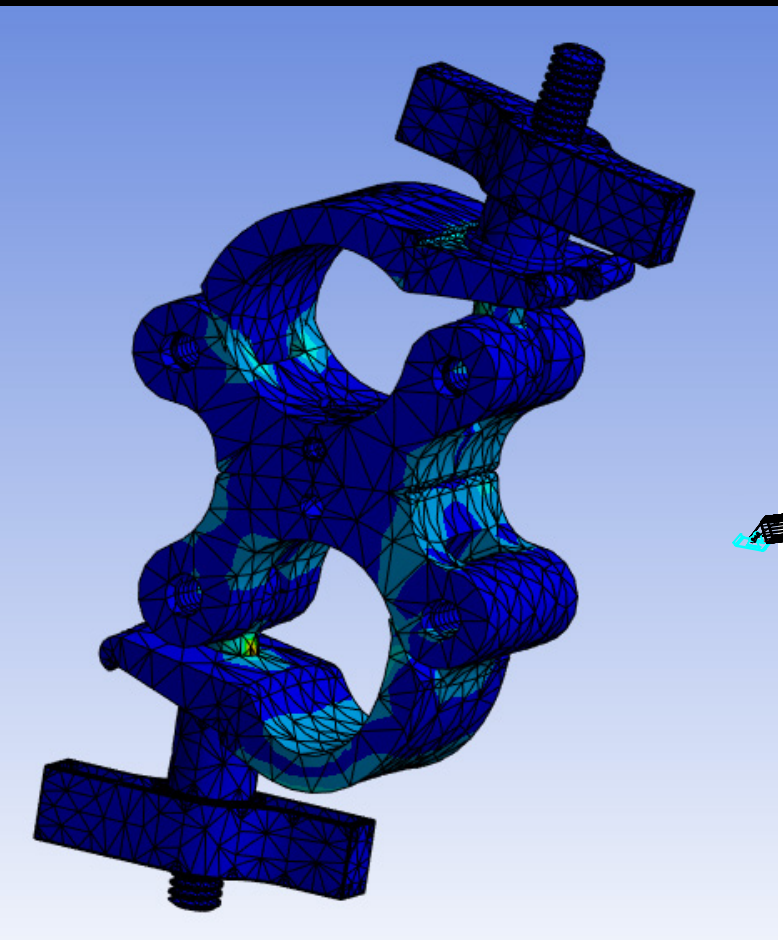

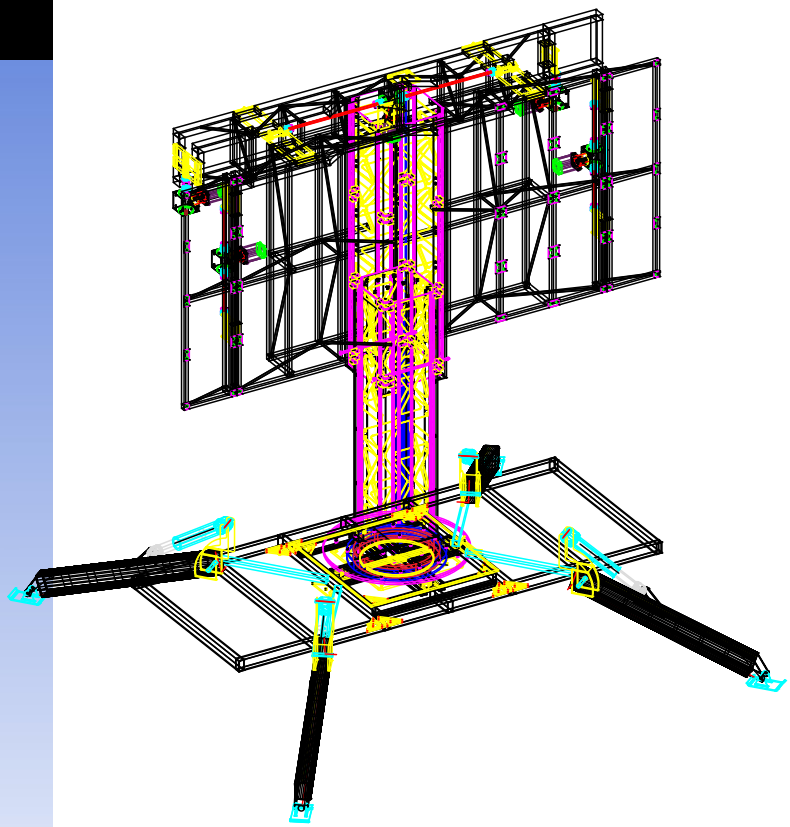

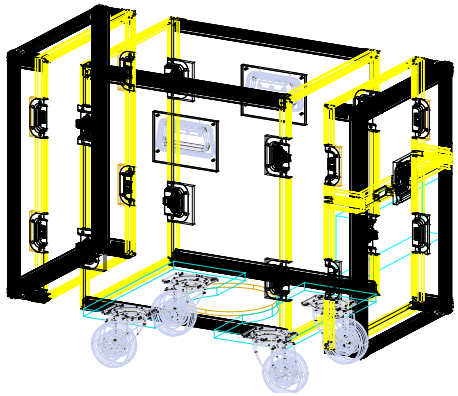

Innovative Engineering for Complete Peace of Mind

Event Lighting boasts a team of highly qualified structural engineers located in both our Sydney and Guangzhou offices. This dedicated team offers unparalleled expertise in the design and development of custom trussing, structures, and staging for live events, installations, educational institutions and anywhere trussing or staging is utilised.

Our engineers provide comprehensive support, including:

- **Custom Design:** Event Lighting's engineers collaborate with clients to develop tailor-made trussing, structures, and staging solutions that perfectly match the clients' specific requirements.
- **Structural Analysis:** Our engineers meticulously verify structural loadings to ensure the safety and integrity of all our products.
- **Loading Table Accuracy:** We guarantee the accuracy of loading tables for all our products, ensuring compliance with applicable safety standards and regulations.
- **Unwavering Safety Commitment:** Event Lighting prioritises safety and compliance. Our rigorous engineering ensures zero risk when our products are used correctly.

Event Lighting's team of expert engineers ensures every customer receives the service, care and reliability that Event Lighting is known for.

AOKA STAGE EQUIPMENTS CO., LTD

Event Lighting is proud to have partnered with Guangzhou Aoka Stage Equipments Co., Ltd for manufacturing and supplying all of its entertainment trussing, staging, and related structural products. Established in 2010, Aoka and Event Lighting have been manufacturing quality products for many years.

Aoka specialises in design, product research, product development and production. Products include aluminium entertainment trussing with various designs and specifications, staging systems for the entertainment and education markets, and all associated accessories. Aoka prides itself on providing high quality products which meet all necessary international standards and certifications while also being able to design and produce custom products in accordance with customer requirements.

The factory's attention to detail, production and design skills have recently been applied to a new department producing road cases and flight cases for the entertainment market.

Aoka has enjoyed success in many international markets including the Middle East, Europe, Australia and of course in their home country of China.

The business is founded on the principles of always adhering to quality first, placing customer needs as their highest priority, and ensuring all products are manufactured to very high standards.

奥卡舞台
AOKA TRUSS



